

Culbertson Corridor Planning Study

PUBLIC INVOLVEMENT PLAN

December 2011

Prepared for:

Montana Department of Transportation



Prepared by:

Camp Dresser & McKee Inc.

Helena, Montana



Table of Contents

1.0 Introduction..... 1

 1.1 Corridor Planning Study Purpose 1

 1.2 Study Area 2

 1.3 Goals of Public Involvement & Outreach Effort..... 4

2.0 Public Participation Procedures 4

 2.1 Study Contacts 4

 2.2 Publications 5

 2.3 Stakeholder Contact List 5

 2.4 Document Availability 6

 2.5 Meetings 7

 2.5.1 Oversight Committee Meetings 7

 2.5.2 Resource Agency Meeting/Involvement..... 7

 2.5.3 Public Meetings..... 7

 2.5.4 Stakeholder Meetings 7

 2.6 Consideration for Traditionally Underserved Populations 7

 2.7 Study Schedule 8

3.0 Communication Strategies 8

 3.1 Summary 8

List of Figures

- Figure 1* *Culbertson Corridor Planning Study – Study Area Boundary*
Figure 2 *Culbertson Corridor Planning Study Schedule*

1.0 Introduction

The Montana Department of Transportation (MDT) has initiated the process to develop the Culbertson Corridor Planning Study at the request from the Town of Culbertson. Due to considerable growth in the oil and gas industry in northeastern Montana, the Culbertson area has experienced an overwhelming increase in truck traffic and congestion through town. The Culbertson Corridor Planning Study will determine cost-effective ways to address transportation needs and safety concerns primarily on US Highway 2 (US-2) and Montana Highway 16 (MT-16).

MDT's Corridor Planning Process links transportation planning activities and the National Environmental Policy Act (NEPA)/Montana Environmental Policy Act (MEPA), as provided for in the Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (SAFETEA-LU). Corridor planning studies are meant to provide information into any future NEPA/MEPA process, help advance viable improvement options into NEPA/MEPA, and provide opportunities for public involvement at all stages.

An initial step in conducting a corridor planning study is to develop a Public Involvement Plan (PIP) that identifies public involvement activities throughout the course of the study. The purpose of this PIP is to ensure a proactive public involvement process that provides opportunities for the public, stakeholders and resource agencies to be involved in all phases of the corridor study process. This is accomplished by providing complete information, timely public notice, opportunities for making comments, and ensuring full access to key decisions.

1.1 *Corridor Planning Study Purpose*

A corridor study analyzes existing data to determine current and future deficiencies and needs within the corridor, and identifies potential environmental issues and mitigation opportunities as projects are moved forward. Specifically, this study will address traffic and safety concerns on Highways US-2 and MT-16 in the study area including within the town of Culbertson. For this study, a number of public involvement strategies are proposed to reach the most people possible and elicit meaningful participation. Such opportunities will:

- Inform the public on the current and forecasted traffic conditions and the safety concerns that are associated with these conditions.
- Involve the public in the process of planning the US-2 and MT-16 corridors within Culbertson,
- Increase the public's ability to provide input and ask questions throughout the corridor planning study, and
- Present findings and update the public on short and long term improvement options.

1.2 Study Area

The study area encompasses a rectangular area around the Town of Culbertson. More specifically, the boundary includes a 4-mile segment of US-2 (between Reference Post (RP) 642.8 and RP 646.8) and a 4-mile segment of MT-16 (between RP 86.6 and RP 88.6 on N-22 and between RP 0 and RP 3 on N-62). Physical features within the study area include the Clover Creek, BNSF Railroad, airport, public school, parks, medical facility, and numerous other public and private properties. The study area boundary for the Culbertson Corridor Planning Study is shown in Figure 1.

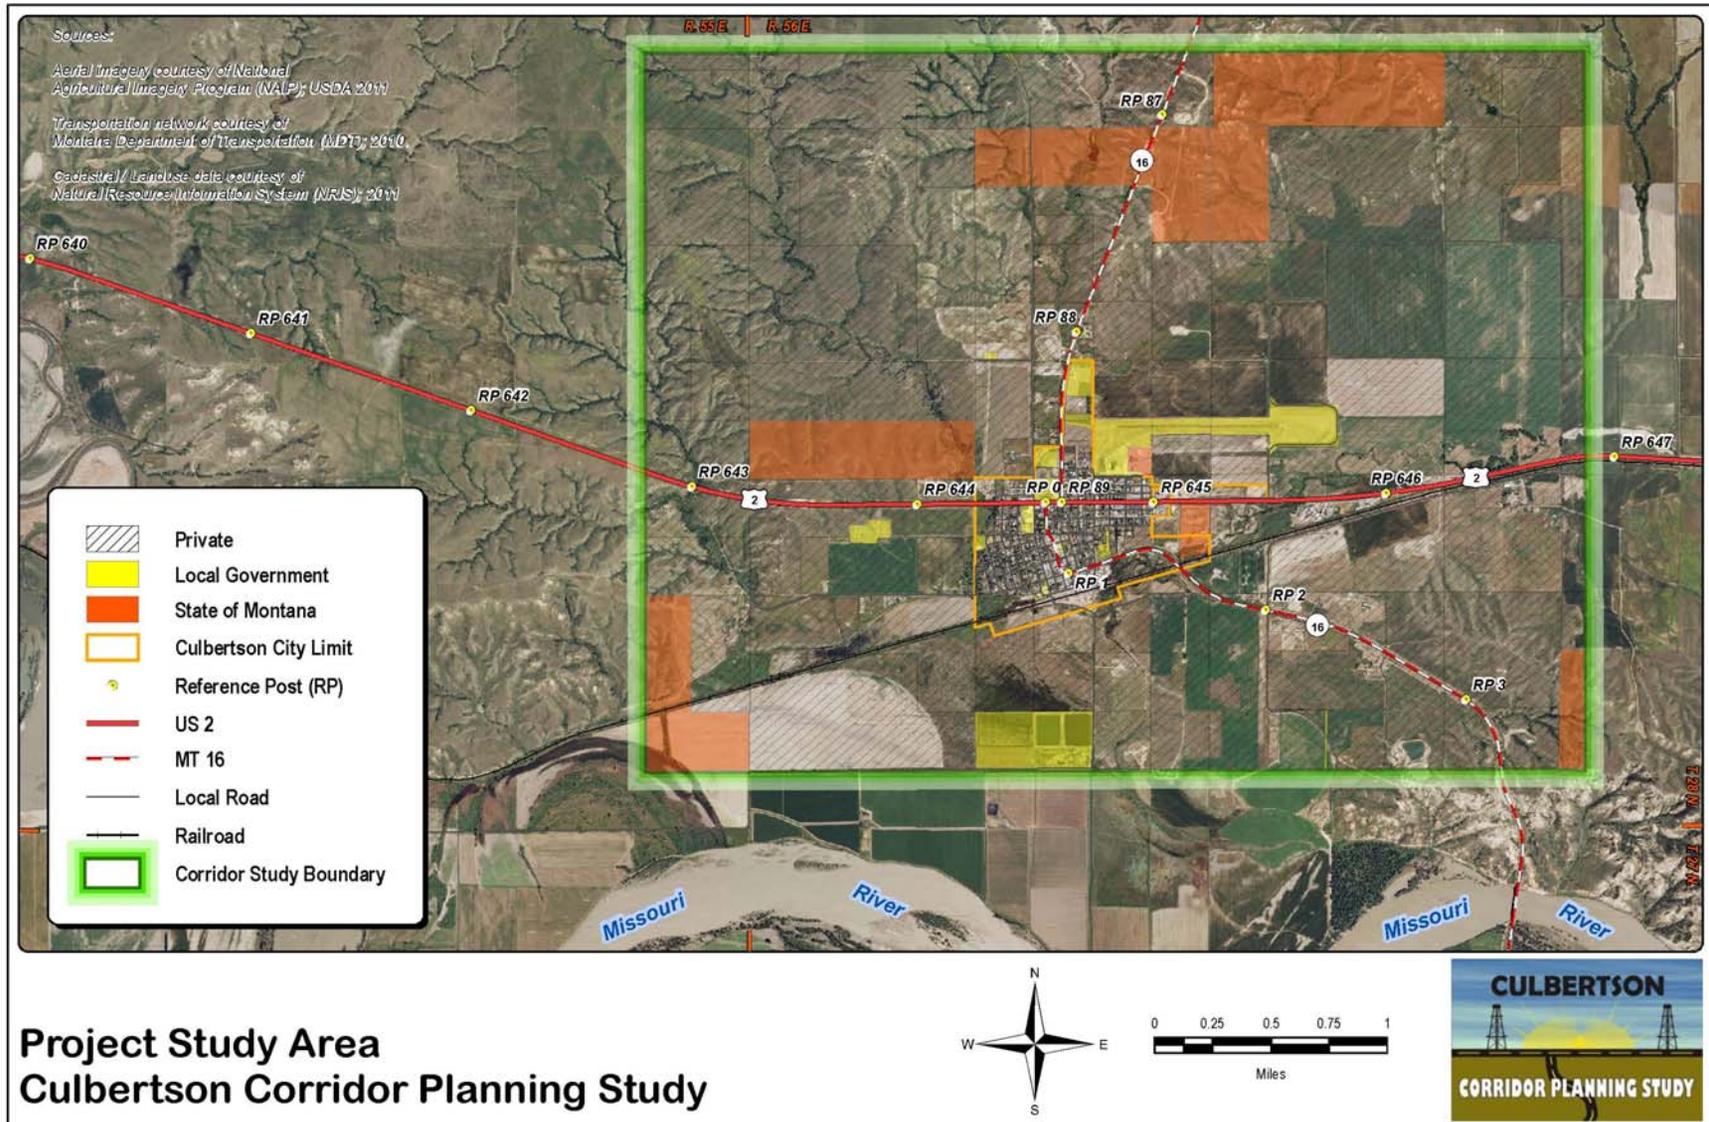


Figure 1 – Study Area Boundary

1.3 Goals of Public Involvement & Outreach Effort

Education and public outreach are an essential part of fulfilling the MDT's responsibility to inform the public about the corridor study effort. MDT encourages public involvement and meaningful participation to engage public ideas and vision regarding issues in the study area. These public outreach activities will be devoted to defining relevant issues and presenting preliminary findings of the study. MDT works to ensure early and continuous public involvement in all major actions and decision.

Education and public outreach are an essential part of fulfilling MDT's responsibility to inform the public about the corridor study effort.

2.0 Public Participation Procedures

The Public Involvement Plan describes the various input opportunities that will be provided as part of the development of the Culbertson Corridor Planning Study. This study encourages active participation in identifying and commenting on corridor issues at every stage of the planning process. Participants in this public participation process include:

- The general public – residents of the Town of Culbertson and adjacent unincorporated areas (Roosevelt County) affected by the study efforts;
- Landowners and business owners affected within the study area boundary;
- The Oversight Planning Committee – made up of representatives from MDT, Town of Culbertson, Roosevelt County, and the Federal Highway Administration (FHWA);
- Resource agencies; and
- Stakeholders and Outreach Groups.

Methods of notifying the public of the study process, upcoming meetings, and other information are detailed in this document. The public and interested parties shall provide input to the Consultant via the methods detailed below.

2.1 Study Contacts

Contact information for MDT and the Consultant will be provided to the public. Telephone numbers and email addresses of study contacts will be published in information that is released and is also included here.

Montana Department of Transportation (MDT), Statewide and Urban Planning, 2960 Prospect Avenue (PO Box 201001), Helena, MT 59620-1001; (406) 444-9193; MDT Project Manager – Carol Strizich, cstrizich@mt.gov

DECEMBER 22, 2011

Montana Department of Transportation (MDT), Glendive District Office, 503 North River Avenue (PO Box 890), Glendive, MT 59330-0890; (406) 345-8200; District Administrator – Shane Mintz, smintz@mt.gov

Town of Culbertson, MT 59218; (406) 787-5315; Mayor of Culbertson – Gordon Oelkers, gordon@nemont.net

Camp Dresser & McKee, Inc. (CDM), 50 West 14th Street, Suite 200, Helena, MT 59601 (801) 363-3955; CDM Project Manager – Grey Turner, P.E., gturner@wilbursmith.com

2.2 Publications

Meeting announcements will be developed by CDM and advertised by MDT at least three weeks prior to meetings. The ads will announce the meeting location, time, and date, the format and purpose of the meeting, and the locations where documents may be reviewed (if applicable). The following print newspapers may carry the display ads.

Culbertson Searchlight – print and online <http://northeastmontananews.com>

Wolf Point Herald – print and online <http://northeastmontananews.com>

Sidney Herald – print and online <http://www.sidneyherald.com>

The Roundup – print and online <http://www.roundupweb.com>

Two newsletters will also be made available one month prior to each public meeting. Newsletters will describe work in progress, results achieved, preliminary recommendations, and other related topics. Each newsletter will be saved as a PDF and delivered to the Town of Culbertson, Roosevelt County, MDT, and select stakeholders for their use in posting to their individual internet sites. Hard copies of the newsletter will be distributed to the stakeholder contact list and made available as needed.

2.3 Stakeholder Contact List

A stakeholder contact list will be produced by CDM that will include individuals, businesses, or groups identified by Roosevelt County, Town of Culbertson, and MDT. The intent of developing the stakeholder list is to identify those individuals and groups to actively seek out and engage in all phases of the study process. Individuals who attend public meetings will also be added to the stakeholder list. The following groups or businesses (at a minimum) will be included in the initial list, providing that addresses and/or emails are obtainable from each respective group for these purposes:

- Town of Culbertson
- Roosevelt County Commissioners
- Culbertson Chamber of Commerce
- Trucking Industry

- Oil and Gas Commission
- Holly Sugar
- Roosevelt County contract planner, Scott Aspenlieder (WWC Engineering)
- Culbertson School District
- Roosevelt Medical Center
- BNSF Railway
- National Guard Shop
- Big Sky Field Airport
- County Fire Departments and Emergency Medical Personnel
- County Sheriff and Montana State Highway Patrol

2.4 Document Availability

All study deliverables and working draft technical memorandums will be available on the study website. The Draft Corridor Planning Study will also be available in hard copy at the following locations:

Document Availability Locations:

- Roosevelt County Extension Office, 307 Broadway Avenue, Culbertson, MT
- Culbertson Public Library, 307 Broadway Avenue, Culbertson, MT
- MDT District 4 Office, 503 North River Avenue, Glendive, MT

Electronic copies of study deliverables will be posted on the study website at the address shown below within 7 days of receiving approval to do so by the study partners.

<http://www.mdt.mt.gov/pubinvolve/culbertson/>

The following Americans with Disabilities Act (ADA)-required statement will be included on all published materials:

The MDT and CDM attempt to provide accommodations for any known disability that may interfere with a person participating in any service, program, or activity associated with this project. Alternative accessible formats of this information will be provided upon request. For further information, call (406) 441-1400 or TTY (800) 335-7592, or by calling Montana Relay at 711. Accommodation requests must be made at least 48 hours prior to the scheduled activity and/or meeting.

2.5 Meetings

2.5.1 Oversight Committee Meetings

Oversight Committee meetings will be scheduled every three weeks for the duration of the twelve-month corridor study. These meetings will be held on Tuesday's from 9:30am – 10:30am in the form of conference calls and webinars, primarily for those that are unable to travel to the Helena MDT office. Individuals included in the meetings will be the Town of Culbertson, Roosevelt County, FHWA, MDT, the Consultant, and others as needed. The meetings are intended to track progress and address study development issues and questions. The meetings are considered an important aspect for the exchange of information and ideas during the development of the study. Throughout these meetings, issues, problems, and possible solutions will be identified and discussed.

2.5.2 Resource Agency Meeting/Involvement

A meeting will be scheduled and held with the Resource Agencies. The meeting will be organized and facilitated by CDM and MDT. This meeting will occur in Spring 2012, after the environmental scan has been completed.

2.5.3 Public Meetings

Two public meetings will be held throughout the duration of the Corridor Study. The first public meeting will be held early on in the study process and will serve to introduce the study and solicit input from local residents about the study area. In addition, current conditions and initial corridor issues will be presented.

The second public meeting will be conducted to present the draft Corridor Study. The draft study will identify preliminary recommendations and findings. The purpose of the meetings will be to present the various recommended improvement options and receive initial feedback from the Culbertson community.

2.5.4 Stakeholder Meetings

Up to four stakeholder meetings may be conducted over the 12-month schedule. While the Consultant is in the Culbertson community, meetings with local stakeholders and/or private corporations may be needed or requested. Some of these groups may include grain companies, trucking companies, railroad, and others. Coordination and approval by the study partners will be obtained prior to the meetings. Throughout the study, various other meetings will be conducted by phone in order to reach out to as many stakeholders as possible.

2.6 Consideration for Traditionally Underserved Populations

MDT and CDM recognizes that additional efforts must be made to involve traditionally underserved segments of the population in the public process for the study, including the disabled, racial and ethnic minorities, and low-income residents. Including these groups leads to planning that reflects the needs of everyone. The following steps will help with these efforts:

Plan Meeting Locations Carefully

- Public meetings will be held in locations that are accessible and compliant with the Americans with Disabilities Act (ADA). If a targeted population is located in a certain geographic part of the Town or County, then the meeting location should be in that area for convenience.

Seek Help from Community Leaders and Organizations

- To facilitate involvement of traditionally underserved populations, community leaders and organizations that represent these groups will be consulted about how to most effectively reach their members.

Be Sensitive to Diverse Audiences

- At public meetings, agency staff and the Consultant will attempt to communicate as effectively as possible. Technical jargon will be avoided and appropriate dress and conduct will be adhered to. A variety of visualization techniques may be used to present information on the study, including but not limited to, aerial photographs, maps, graphs, full size posters, color handouts, and PowerPoint presentations.

2.7 Study Schedule

Adherence to the study schedule is important to stay on track and keep all participating parties engaged. The Culbertson Corridor Planning Study schedule is attached as Figure 2. It is CDM's intent to adhere to the schedule.

3.0 Communication Strategies

3.1 Summary

The Culbertson Corridor Planning Study establishes guidelines and procedures for encouraging public participation. The following communication strategies and techniques may be used in their entirety (or partially) to distribute the information to the community at large and seek a higher level of engagement. The consultant will utilize as many of these techniques as possible that best suit the corridor study development.

- All relevant deliverables and associated materials will be posted on the study website at :

<http://www.mdt.mt.gov/pubinvolve/culbertson/>

- Public meeting announcements and press release will be developed.

DECEMBER 22, 2011

- Special presentations may be made, upon request, to community groups and organizations.
- Select mailings, as requested by interested parties, will be provided to individuals or groups that have expressed interest or made comments at meetings.
- Study documents and materials will be distributed to the Oversight Committee, to provide a better understanding of proposed corridor issues and recommendations and provide the study entities with feedback and an opportunity for continual comment. Hard copies of all materials will be made available at the MDT Statewide and Urban Planning Section (2960 Prospect Avenue, Helena, MT).
- Fact sheets may be used to explain transportation related issues.
- Special issues documents may be announced or reported at meetings and/or via email on relevant corridor issues.

All comments received will be considered throughout the planning process. Responses to written comments received on the public draft Culbertson Corridor Planning Study will be made via written response in an Appendix to the actual Corridor Planning Study. In some circumstances, the MDT and/or the Consultant will respond directly to an individual or group by letter or telephone call, or by way of a periodic newsletter.

CULBERTSON CORRIDOR PLANNING STUDY - Project Schedule

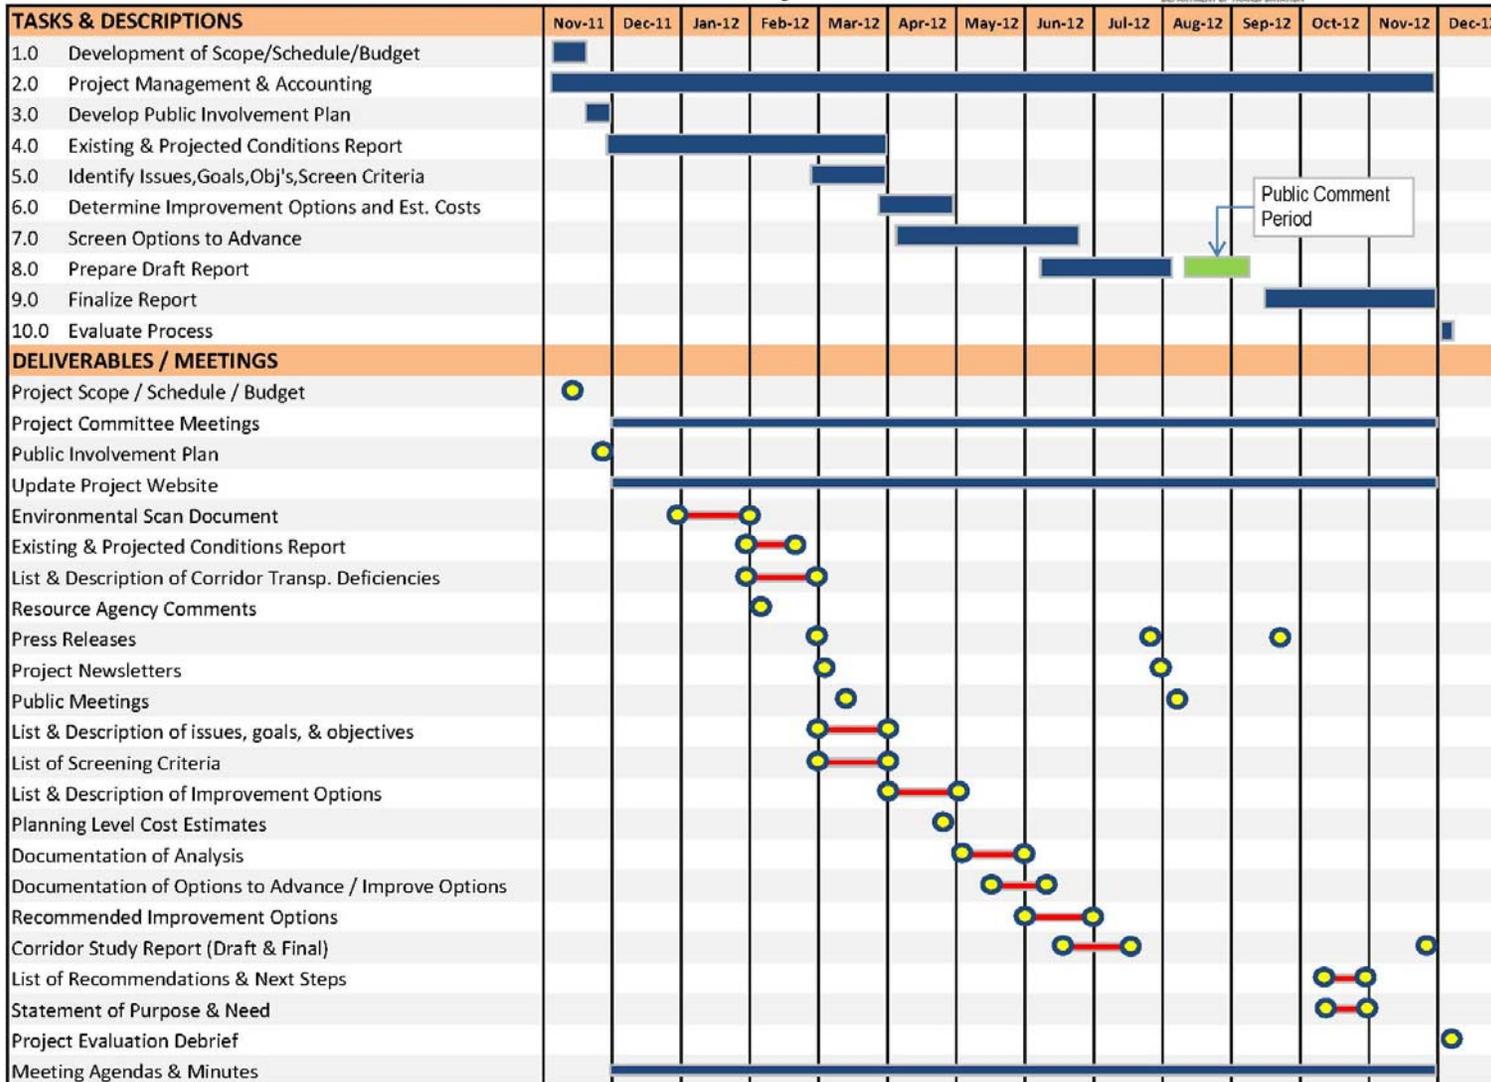


Figure 2 - Schedule

Culbertson Corridor Planning Study

EXISTING & PROJECTED CONDITIONS REPORT

June 2012

Prepared for:

Montana Department of Transportation



Prepared by:

CDM Smith

Helena, Montana



Table of Contents

Chapter 1	Introduction	1
Chapter 2	Existing Socio-Economic Conditions	4
2.1.1	Regional Population and Demographics	6
2.1.2	Culbertson Population and Demographics	9
2.1.3	Culbertson Employment	10
2.1.4	Regional Economy and Employment	11
Chapter 3	Existing Roadway Conditions	18
3.1	Existing & Projected Traffic Volumes	18
3.1.1	Existing Traffic Volumes	18
3.1.2	Projected Traffic Volumes	22
3.2	Right-of-Way and Jurisdictions	28
3.3	Physical Characteristics	31
3.4	Design Standards	33
3.5	Roadway Geometrics	35
3.5.1	Horizontal Alignment	35
3.5.2	Vertical Alignment	36
3.5.3	Roadside Safety (Clear Zone)	38
3.5.4	Intersection Sight Distance	39
3.6	Surface Width and Pavement Conditions	39
3.7	Geotechnical	41
3.8	Drainage	41
3.9	Hydraulic Structures	41
3.10	Bridge Crossings	44
3.10.1	Clover Creek Bridge	45
3.10.2	Clover Creek/BNSF Railway Bridge	46
3.11	Crash Analysis	46
3.12	Railroad	50
3.13	Non-Motorized Infrastructure	50
3.14	Airport	50
3.15	Utilities	51

3.16	Access Points.....	51
3.17	Other Planning Documents.....	53
3.17.1	Growth Policy.....	53
3.17.2	Capital Improvements Plan.....	53
3.17.3	Transportation Regional Economic Development Study.....	54
3.17.4	Culbertson – East to North Dakota Environmental Assessment.....	54
Chapter 4	Existing Environmental.....	55
4.1	Physical Environment.....	55
4.1.1	Air Quality.....	55
4.1.2	Soil Resources and Prime Farmland.....	55
4.1.3	Land Use.....	55
4.1.4	Geologic Resources.....	56
4.1.5	Water Resources.....	56
4.1.5.1.	Surface Water.....	56
4.1.5.2.	Public Water Supply.....	56
4.1.5.1.	Irrigation.....	57
4.1.5.1.	Wetlands.....	57
4.1.6	Floodplains and Floodways.....	58
4.1.7	Hazardous Substances.....	58
4.2	Biological Resources.....	58
4.2.1	Fish and Wildlife.....	58
4.2.2	Threatened and Endangered Animal Species.....	58
4.2.3	Animal Species of Concern.....	59
4.2.4	Vegetation.....	60
4.2.4.1.	Threatened and Endangered Plant Species.....	60
4.2.4.2.	Plant Species of Concern.....	60
4.2.4.3.	Noxious Weeds.....	60
4.3	Cultural Resources.....	60
4.3.1	Archaeological Resources.....	60
4.3.2	Historic Resources.....	61
4.3.3	6 (f) Resources.....	61
4.3.4	4 (f) Resources.....	61

4.3.5 Noise 62

Chapter 5 Areas of Concern..... 62

5.1 Geometrics..... 62

5.2 Intersections 63

5.3 Access Points..... 64

5.4 Non-Motorized Infrastructure 64

5.5 Sight Distance..... 64

5.6 Pavement Conditions 64

5.7 Truck Traffic 64

5.8 Environmental..... 64

List of Tables

Table 1. Regional 2010 Census Data 6

Table 2. 2010 Census Data for Culbertson and Roosevelt County 9

Table 3. Culbertson Employment by Industry (2006 – 2010) 11

Table 4. December 2011 Unemployment Numbers (not seasonally adjusted)..... 12

Table 5. Average Annual Daily Traffic 19

Table 6. Current Intersection Level of Service during Peak Hour 22

Table 7. 2032 Intersection Level of Service during Peak Hour 28

Table 8. Right-of-Way Widths 30

Table 9. Geometric Design Criteria for Rural and Urban Principal Arterials (National Highway System – Non Interstate) U.S. Customary 34

Table 10. Horizontal Alignment 36

Table 11. Maximum Grade..... 37

Table 12. Vertical Alignment..... 37

Table 13. Existing Roadway Surface Width for US 2 39

Table 14. Existing Roadway Surface Width for MT 16..... 40

Table 15. Existing Roadway Surface Width for MT 16..... 40

Table 16. Hydraulic Structures..... 42

Table 17. Bridge Sufficiency Rating (SR) 45

Table 18. Crash Statistics 46

Table 19. Crashes by Location..... 47

Table 20. Crashes by Roadway Segment 49

Table 21. Access Points along US 2	52
Table 22. Access Points along MT 16	52
Table 23. Public Water Supply	57
Table 24. Montana Animal Species of Concern	59
Table 25. Geometric Areas of Concern	63

List of Figures

Figure 1. Study Area Boundary	2
Figure 2. Town of Culbertson.....	3
Figure 3. Bakken Formation in Montana	5
Figure 4. Total Observed and Projected Population in the Study Counties	7
Figure 5. Total Observed and Projected Population of Montana and the Study Counties (Indexed to 2000)	8
Figure 6. Age Distribution of the Study Counties (Projected after 2010)	9
Figure 7. Culbertson and Roosevelt County Populations	10
Figure 8. Economic Base of Richland County, Montana 2008 to 2010.....	13
Figure 9. Employment Growth Projections for Montana and the Study Region (Indexed to 2001)	14
Figure 10. 2008 Data and Projections for Jobs in Mining and Transportation Sectors in the Two-County Area.....	15
Figure 11. Oil Activity in Northeastern Montana (January 2012)	16
Figure 12. Oil Wells within Study Area Boundary	17
Figure 13. Current 24-Hour Turning Movement Counts (Heavy Vehicle # / Total Vehicle #)	20
Figure 14. Current AADTs per 24-Hour Turning Movement Counts.....	21
Figure 15. 15-Year Growth Rate for US 2	23
Figure 16. 15-Year Growth Rate for MT 16 (South)	24
Figure 17. 15-Year Growth Rate for MT 16 (North)	24
Figure 18. US 2 AADT (2000-2032).....	25
Figure 19. MT 16 (South) AADT (2000-2032).....	26
Figure 20. MT 16 (North) AADT (2000-2032).....	26
Figure 21. Revised US 2 AADT (2000-2032)	27
Figure 22. Land Ownership in Study Area.....	29
Figure 23. Posted Speed Limits	32
Figure 24. Crash by Collision Code	49

Appendix A: 2012 Level of Service Analysis

Appendix B: US 2 Calculations

Appendix C: MT 16 (South) Calculations

Appendix D: MT 16 (North) Calculations

Appendix E: 2032 Level of Service Analysis

Chapter 1 Introduction

The purpose of this report is to portray the existing and projected roadway conditions and environmental factors throughout the corridor study area for US Highway 2 (US 2) and Montana Highway 16 (MT 16). The findings contained in this report help identify areas of concern and constraints in developing improvement options for the high-level planning process.

US 2 and MT 16 are both functionally classified as Rural Principal Arterials on the National Highway System (NHS) Non-Interstate. The Study area around Culbertson, Montana includes a 4-mile segment of US 2 (between Reference Post (RP) 642.8 and RP 646.8) and a 5-mile segment of MT 16 (between RP 86.6 and RP 88.6 and between RP 0 and RP 3). There are two distinct sections of MT 16 through the corridor study area. The southern section of MT 16 enters the south side of the Study area at RP 3 and continues northwest over the BNSF Bridge, heads west along 1st Street, turns north on Broadway Avenue, and intersects US 2 at RP 0. MT 16 then continues east and is concurrent to US 2 for one block before heading north to begin the northern portion of MT 16 at RP 88.6 and continues north to RP 86.6. The study area boundary and the Town of Culbertson are shown in Figures 1 and 2, respectively.

Due to considerable growth in the oil and gas industry in northeastern Montana and northwestern North Dakota, the Culbertson area has experienced an increase in truck traffic through town. Chapters 1 and 2 will focus on the existing roadway, social, economic, and environmental conditions within the Culbertson Corridor Study area. The information in Chapters 1 and 2 is based on a high-level scan obtained from publicly available sources and as-built construction drawings. If a project is forwarded from this Study, the information presented herein may be used to inform future project level analysis.



Figure 1. Study Area Boundary

Chapter 2 Existing Socio-Economic Conditions

The Culbertson Corridor Planning Study area is centered around the town of Culbertson in Roosevelt County. Culbertson is an incorporated city with a population of 714, according to the 2010 US Census. In recent years, Culbertson, Roosevelt County, and surrounding communities have experienced socio-economic impacts within the area due to the increase in the oil and gas industry. The Study area is located within the Bakken Shale Formation which is experiencing a boom in oil development. The Bakken region, which includes northeastern Montana, northwest North Dakota, and southern Saskatchewan in Canada, is considered the fastest growing economic area in the United States at the present time. The Bakken is the largest known reserve of light sweet crude oil in North America. The formation of shale source rock covers about 200,000 square miles. Figure 3 shows the Bakken Formation in northeastern Montana.

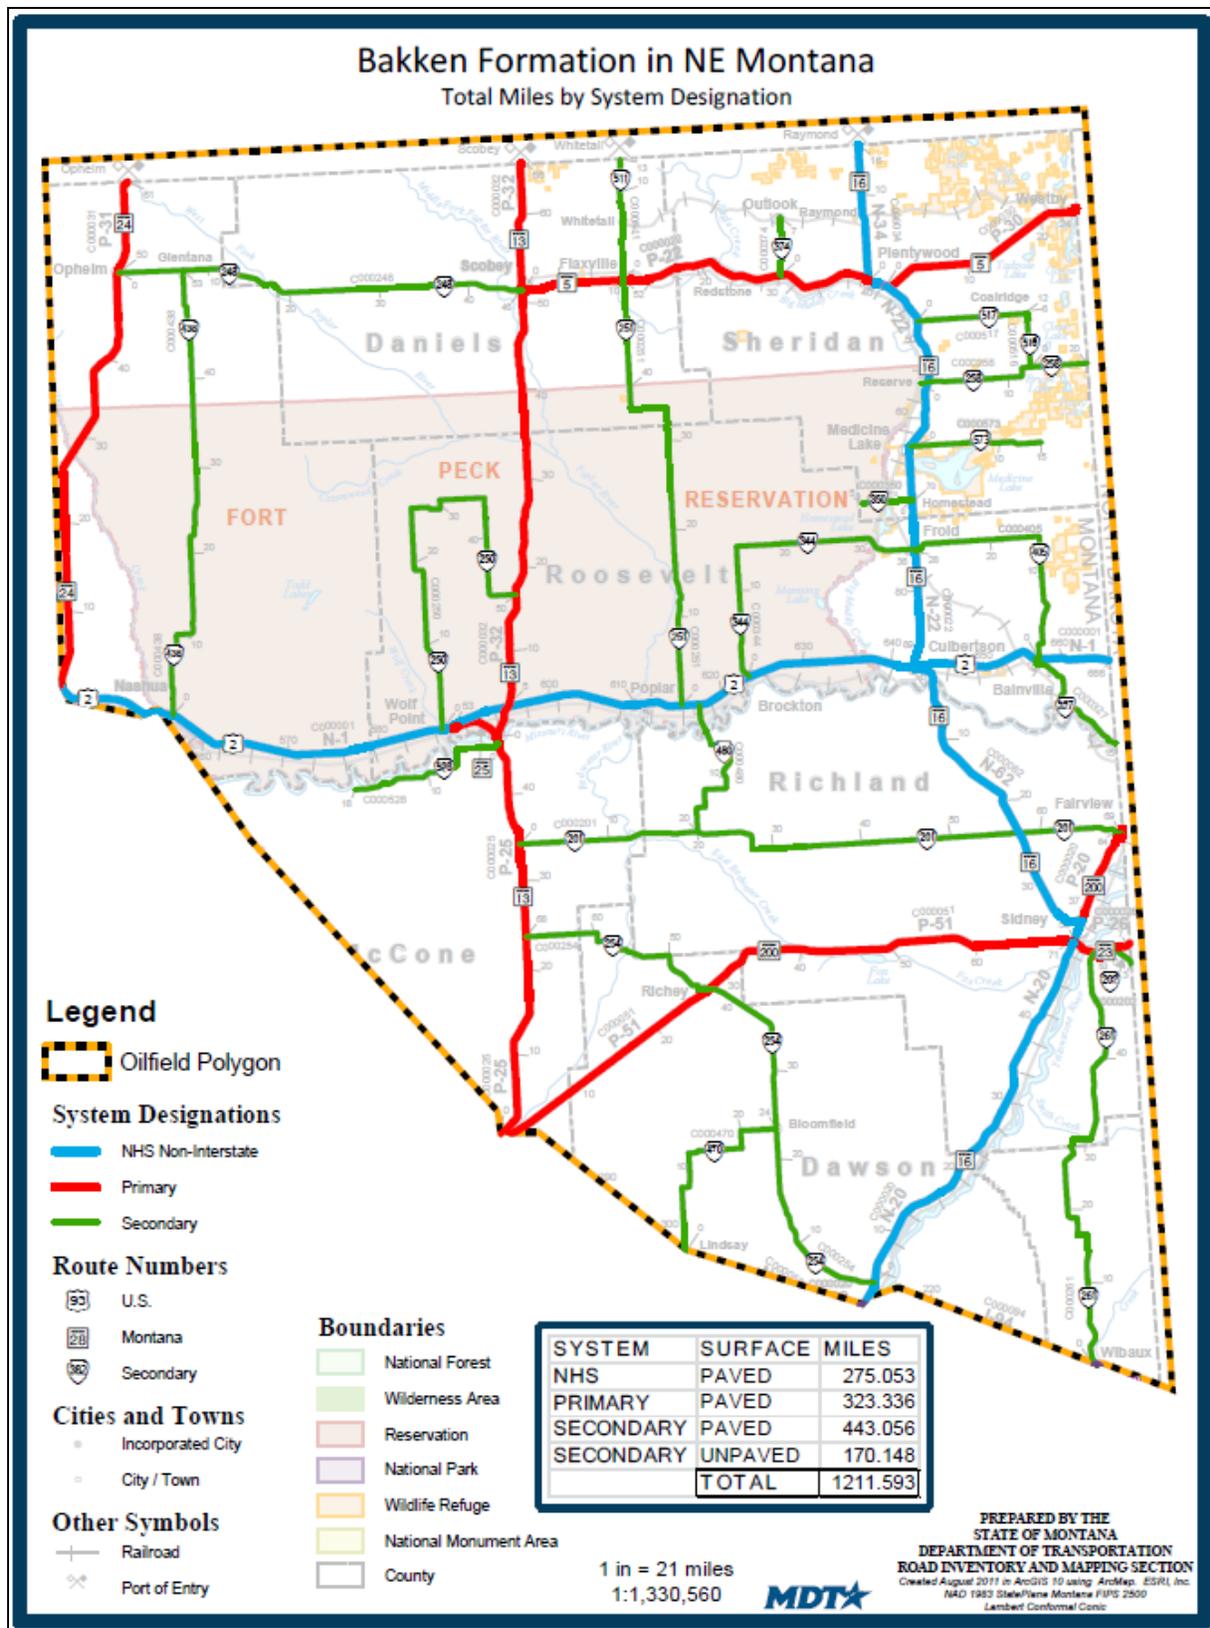


Figure 3. Bakken Formation in Montana

As shown in Figure 3, the Bakken formation encompasses a large region outside the Culbertson Corridor Planning Study area that has been affected by the recent development in the oil and gas industry. Economic activity in this area may be generated by providing materials and resources such as sand and water used in the fracturing process, and by delivering outputs such as oil, gas, and wastewater to transmission stations and injection wells, performing value-added work such as processing, engineering, marketing, and labor. The extent to which counties and cities in the Bakken region participate in the oil boom, either as a location of energy development or as providers of goods and services, continues to evolve.

The socio-economic information and factors contained in this section will reflect conditions in both Roosevelt and Richland Counties. Richland County is located south of Roosevelt County and includes the towns of Sidney and Fairview. Analysts expect oil exploration and development to continue in the Bakken region over the next ten to twenty years. Existing socioeconomic data are mostly out of date in relation to the recent oil boom activity. Projections are made to the 20-year planning horizon, but current economic changes add uncertainty to the social and economic projections. This section presents the most recent socioeconomic statistics available and describes the rapid, recent changes in the area, particularly in the energy industry.

2.1.1 Regional Population and Demographics

The region has been somewhat depressed economically and has experienced negative population growth in recent decades. Current oil activity has brought more people and traffic to the region. Based on the 2010 Census data, Table 1 summarizes basic population information for Roosevelt and Richland Counties.

Table 1. Regional 2010 Census Data

	Roosevelt	Richland
County Population	10,425	9,746
Wolf Point	2,621	
Poplar	810	
Culbertson	714	
Sidney		5,191
Fairview		840
Race		
White	39%	97%
American Indian	63%	3%
Ethnicity: Hispanic or Latino	2%	3%
Housing		
Total housing units	4,063	4,550
Owner-occupied	54%	64%
Renter-occupied	34%	28%
Vacant	13%	8%

Roosevelt County has a large share of its population residing outside communities. Roosevelt County's largest cities are Wolf Point, Poplar, and Culbertson, which account for about 40 percent of the county's population. Sidney and Fairview make up 62 percent of Richland County's population. Roosevelt County includes a large part of the Fort Peck Indian Reservation, consisting of the Assiniboine and Sioux Tribes. The Native American population of Roosevelt County is 63 percent of the total, compared with 3 percent in Richland County. In terms of ethnicity, the Hispanic population is 2 to 3 percent, which is comparable to the state as a whole.

Field reports suggest that an influx of workers has put pressure on housing markets in the Bakken region since the 2010 Census counts were taken. Accounts of housing shortages have become regular, and although the reports are not systematic enough to include in this section, the accounts are consistent with more frequent data reports such as traffic counts and unemployment rates, which are addressed in the following sections. It should be noted, that currently in the Culbertson area, hotels are fully booked, rental properties are occupied, and a future man camp is being planned to house oil workers. Communities throughout the region, including Culbertson, are unable to handle the infrastructure demand due to the rise in oil production and operations. The 2010 Census data are a baseline in comparison against more current information as it becomes available.

Figure 4 shows the population of the regional counties from 2000 to 2010 (shown in blue) and projections out to year 2030 (shown in red) based on NPA Data Services, Inc. through the Department of Commerce. The general trends have been confirmed by the Montana Census and Economic Information Center.

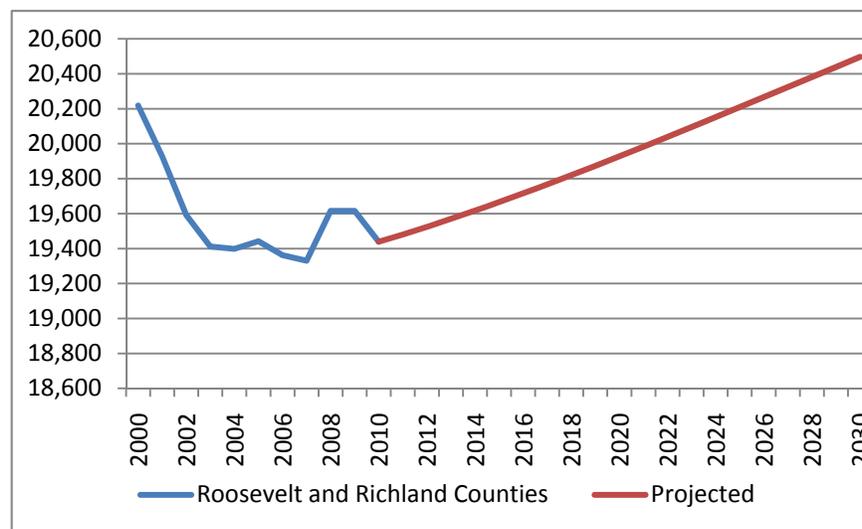


Figure 4. Total Observed and Projected Population in the Study Counties

Between 2000 and 2004, Roosevelt and Richland Counties experienced a population decline of nearly 600 people. Following that was a slight rebound in 2008 and 2009, but the area had a net negative population growth for the decade. Population projections suggest that the population of the two

counties will rebound slowly and by 2030 the counties will reach populations slightly higher than in 2000. The long-term population trend in much of eastern Montana outlines a general expectation that population growth will be limited in the 20-year planning horizon. The projections reflect expectations from before the current oil boom, so growth rates may be higher over the 20-year planning horizon. However, the current projections represent a baseline against which future estimate may be measured.

Figure 5 shows both the state and study region historic and projected population in terms of percent changes from the year 2000. The figure shows that the study region is expected to remain near the 2000 population over the forecast period. By contrast, the state as a whole has had moderate positive growth and is expected to grow at a similar rate into the future, increasing to about 140 percent of the state's 2000 population by the year 2030. Again, these projections are based on Census data that does not take into account recent and projected growth in Roosevelt and Richland Counties. Given these recent events, it may be expected that population growth rates for these two counties will compare more closely with state rates by the year 2030.

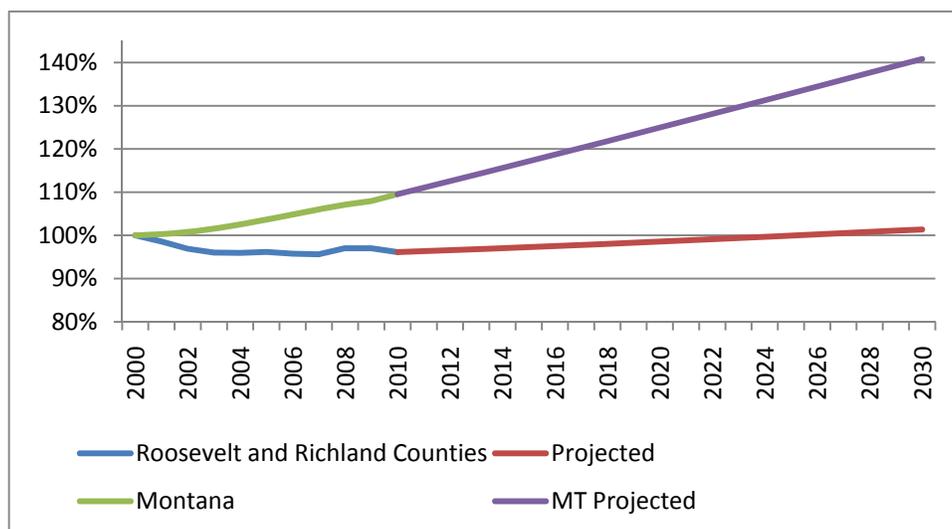


Figure 5. Total Observed and Projected Population of Montana and the Study Counties (Indexed to 2000)

The age distribution of the study area is shown in Figure 6. The figure shows a decline in the percentage of working aged population of the two counties (ages 20 to 64) from a peak of about 55 percent late in the last decade to just over half by 2030. The population 19 and under is expected to decline at a moderate pace compared to the whole population. The population 65 and over is expected to increase by about six percent from its level in the last decade to 2030.

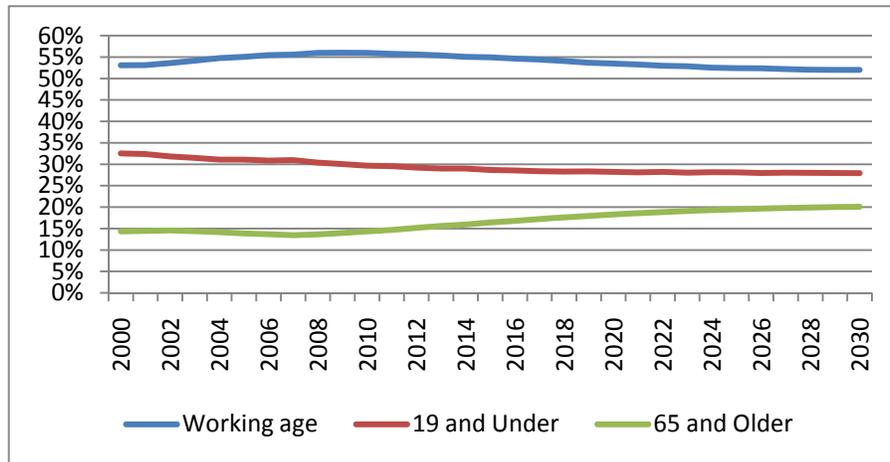


Figure 6. Age Distribution of the Study Counties (Projected after 2010)

2.1.2 Culbertson Population and Demographics

According to the US Census, the population of Culbertson in 2010 was 714. The 2000 US Census, showed the population of Culbertson as 716, indicating the population has basically remained constant over a 10-year period. By comparison, the population of Roosevelt County over the same 10-year period was 10,620 in 2000 and 10,425 in the year 2010. This calculates to be a slight decrease of approximately 2%. Table 2 below shows the population and age distribution percentages for Culbertson and Roosevelt County.

Table 2. 2010 Census Data for Culbertson and Roosevelt County

Distribution	Culbertson		Roosevelt County	
	Number	Percentage	Number	Percentage
Total Population	714	-	10,425	-
Male	365	51.1	5,144	49.3
Female	349	48.9	5,281	50.7
Under 18	166	23.2	3,311	31.8
18-65	415	58.1	5,988	57.4
Over 65	133	18.6	1,126	10.8

According to Table 2, nearly a quarter of the Culbertson population includes school-aged children (under the age of 18).

Of the major race categories used by the US Census Bureau, almost 89 percent of the population of Culbertson is categorized as white with the next highest percentage being American Indian and Alaska Native at 6.3 percent. This has shifted slightly over the past 10 years with 93 percent white and 5 percent American Indian back in 2000. For Roosevelt County, in part due to the Fort Peck Indian Reservation as previously mentioned, the percentages are considerably different. The percent population in Roosevelt County considered white is 36 percent and the American Indian/Alaska Native is 60 percent. These and other race percentages for Culbertson and Roosevelt County are shown in the figures below.

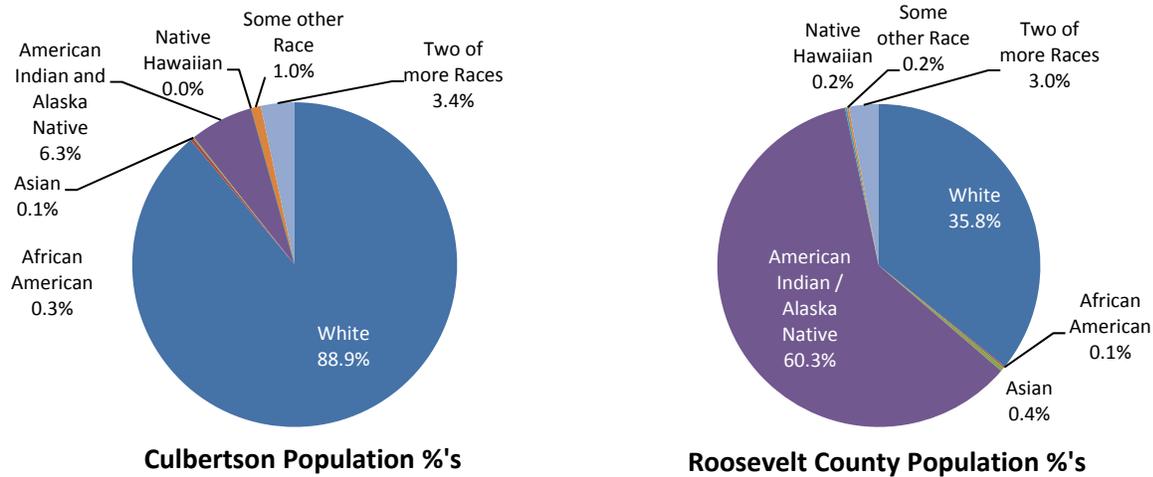


Figure 7. Culbertson and Roosevelt County Populations

2.1.3 Culbertson Employment

From 2006 to 2010, the US Census Bureau, by means of the American Community Survey (ACS), produced the 5-year estimate for industry by occupation for the Town of Culbertson. The study indicated the town of Culbertson has approximately 354 employed persons in the labor force. The top fields of employment are education and health care, followed by the agriculture industry. Table 3 shows the employment within Culbertson by industry, according to ACS.

Table 3. Culbertson Employment by Industry (2006 – 2010)

Industry	Total Estimate
Agriculture, forestry, fishing and hunting	56 (15.8%)
Construction	28 (7.9%)
Manufacturing	14 (4.0%)
Wholesale trade	13 (3.7%)
Retail trade	26 (7.3%)
Transportation and warehousing, and utilities	39 (11.0%)
Information	0 (0.0%)
Finance and insurance, and real estate and rental and leasing	5 (1.4%)
Professional, scientific, and management, and administrative and water management services	2 (0.6%)
Educational services, and health care and social assistance	108 (30.5%)
Arts, entertainment, and recreation, and accommodation and food services	24 (6.8%)
Other services, except public administration	8 (2.3%)
Public Administration	31 (8.8%)
Civilian employed population (16 years and over)	354

2.1.4 Regional Economy and Employment

The Bakken region indicates a direct link between national and global conditions, particularly in natural resource-based economies, to those in rural economic markets. Industry and transportation changes beyond the control of local regions can experience shifts in investment and income as a result of the changing industry.

The invention of horizontal drilling (in the Elm Coulee area of Richland County) enabled the entire Bakken formation to be opened to oil and gas development. The discovery of more readily accessible oil pockets of the Bakken within North Dakota has led recent energy development activity to concentrate in that state. Regardless of the epicenter location, this whole region is now bustling with explorers, drillers, workers, drivers, suppliers. Railroads are making improvements and new pipelines are being

planned and proposed. In addition, the region is a well-established and production agricultural area. Grain and pulse crops in the area have been productive, agricultural prices are good, and investments in truck-to-rail facilities for farm crops are continuing.

The surge of activity presents a robust situation in a region that some had written off as an economically unviable “Buffalo Commons”, or vast native prairie land. The main challenge for the analysis presented in this study is that the most recent economic data are unable to measure the extent of the recent oil activity and are largely limited to providing information from before the current boom.

The most recent unemployment figures from the state and federal labor departments suggest favorable current employment conditions in the study area, as shown in Table 4. As of December 2011, unemployment in Richland County was 2.3 percent, which is less than half the state-wide rate and nearly a third of the national rate. The rate in Roosevelt County, at 6.8 percent was slightly over the state average.

Table 4. December 2011 Unemployment Numbers (not seasonally adjusted)

	Labor Force	Employed	Unemployed	Rate	County Rank
United States				8.5%	
Montana	496,092	462,673	33,419	6.7%	
Roosevelt County	4,579	4,266	313	6.8%	39
Richland County	6,300	6,153	147	2.3%	2

Low unemployment rates may reflect individuals who have stopped looking for work or out-migration of workers, but this is not likely the case in the region. According to reports of job expansion, it seems as if recent unemployment figures actually reflect economic expansion.

Figure 8 shows an estimation of the economic base of Richland County for the period 2008 to 2010 from the University of Montana Bureau of Business and Economic Research (BBER). The economic base of an economy refers to activities that bring income into an area or the economy remains in the area. Although the figure only considers Richland County, it is the best window available into the basic economy of the larger study area.

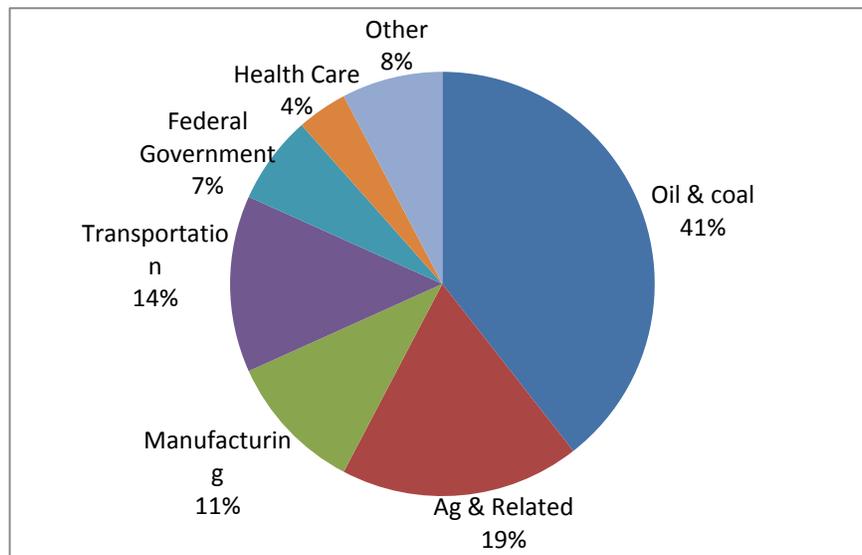


Figure 8. Economic Base of Richland County, Montana 2008 to 2010

The single largest share of the Richland County economy is from the energy industry (41 percent). A slightly larger part is made up from the total of agriculture, manufacturing, and transportation industries (44 percent). Manufacturing and transportation become linked to other economic-base industries when goods like oil and gas, or wheat and sugar beets are processed and shipped. The economic base is rounded out by government activities, health care, and other (including tourism).

Figure 9 shows percentage change in jobs for Montana and the study area. Roosevelt and Richland Counties are indicated by "R&R" in the figure. This figure highlights two industries of interest: mining and transportation. All other industries are combined. Public statistics on industries commonly lag several years behind, in which 2008 projection information is the latest data available.

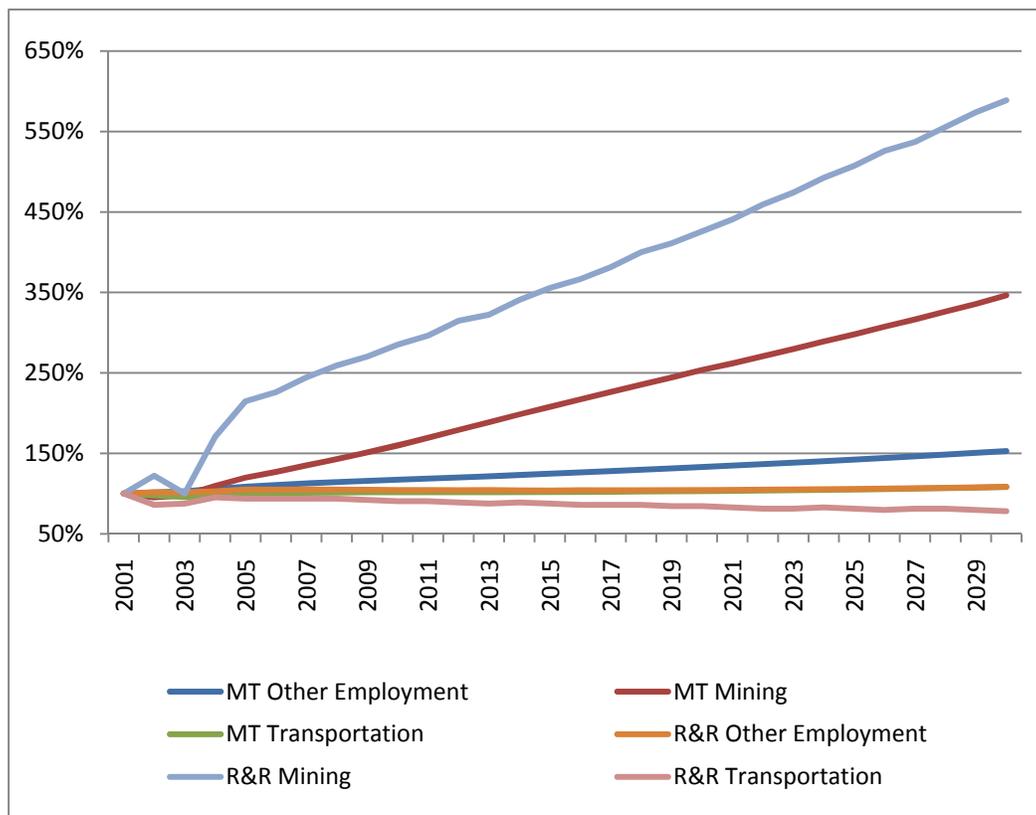


Figure 9. Employment Growth Projections for Montana and the Study Region (Indexed to 2001)

As the employment projections do not reflect the recent oil boom in the Bakken region, the projections may be useful as a baseline reflecting earlier expectations. The projections show the energy sector (mining) growing faster in the study area than in the state as a whole. The remaining industries (transportation and “other”) are not projected to grow much through the year 2030.

Figure 10 shows actual and projected numbers of job estimates for mining and transportation sectors in the study region. The figure illustrates mining employment is projected to increase from about 300 in 2002 to about 1,600 by the year 2030. Transportation and public utilities jobs are projected to decline from a high of 640 to 500. As previously noted, such projections preceded the current Bakken oil boom.

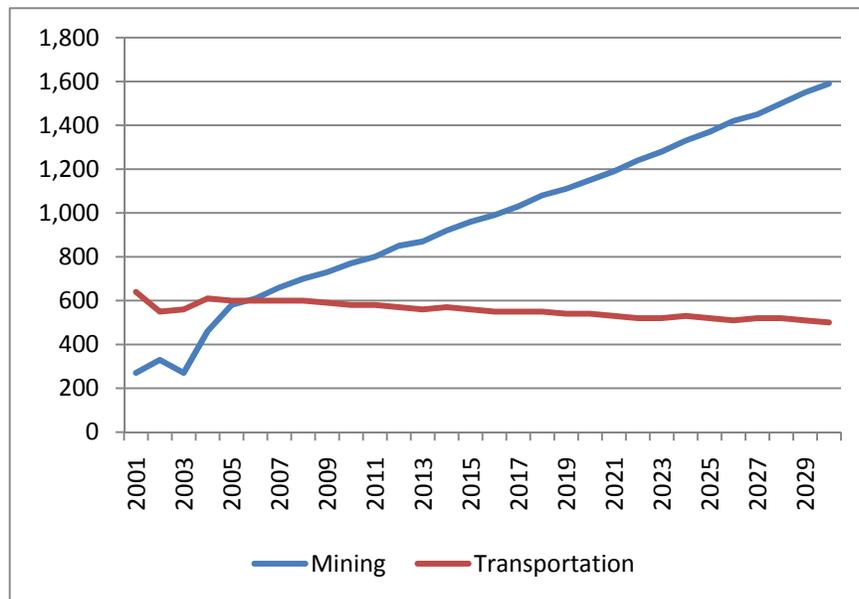


Figure 10. 2008 Data and Projections for Jobs in Mining and Transportation Sectors in the Two-County Area

Figure 11 shows oil activity in Montana as of January 2012 by the Montana Board of Oil and Gas. The green dots represent oil wells that are in the process of development; the yellow dots indicate wells have been permitted but have not begun; and the red dots represent producing oil wells. The thickest center of oil activity in this broader region is within Richland County.

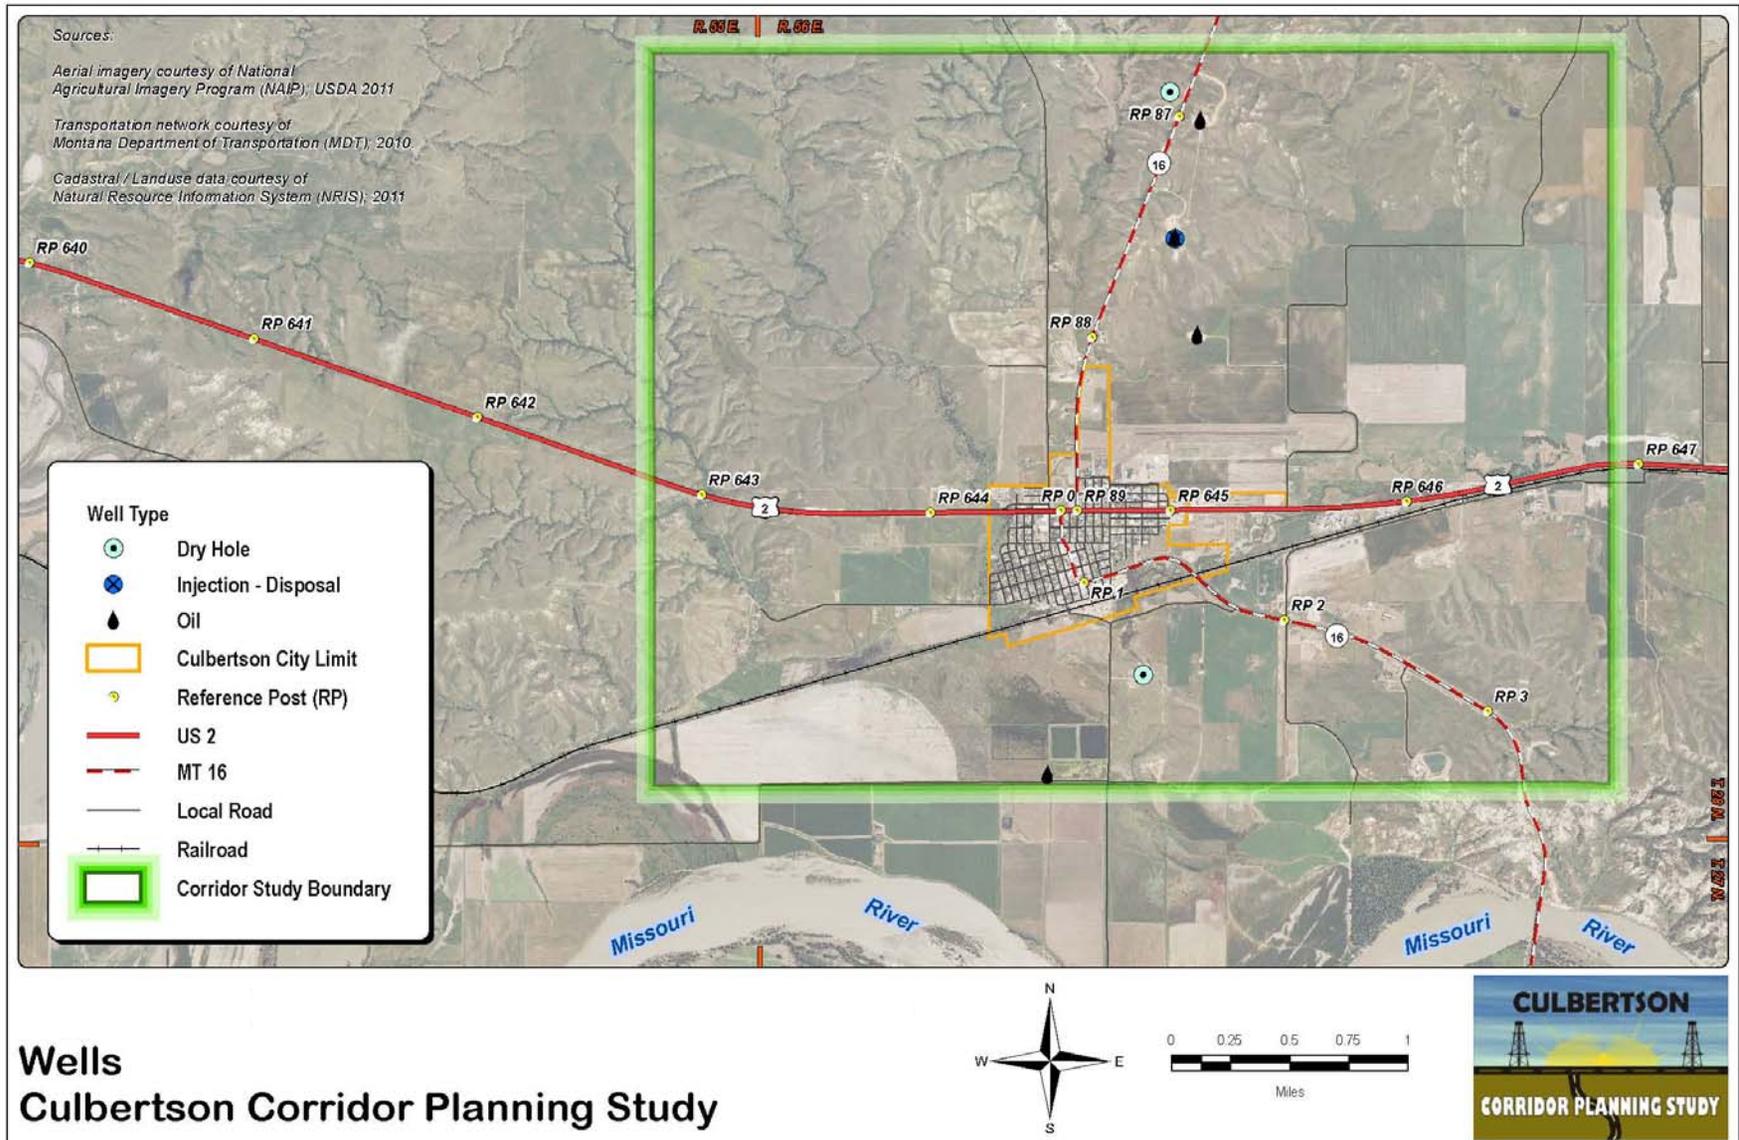


Figure 12. Oil Wells within Study Area Boundary

Agriculture also plays a major role in Culbertson's and the surrounding region's economy. The main products harvested in this region are wheat, sugar beets, alfalfa, beef cattle, and food oils. BNSF Railway loading facility on the south end of Culbertson allows shipping of the regional products to consumers all across the country. Columbia Barge Company plans to build a 110-car grain loading facility in the Culbertson area. The grain loading facilities are designed to load 110-rail cars full of wheat within 24 hours, and they seem to have added major efficiencies in rail hauling of agricultural products. Shuttle loading facilities continue to be added in Montana, and their long-term impacts are difficult to predict. Additional facilities are located approximately 80 miles east of the Culbertson area. Some studies suggest that the emergence of grain loading facilities has, to date, led to heavier grain trucks traveling over longer distances, with potential impacts on Montana roadways.

The Culbertson area offers many recreational opportunities. Fishing, swimming, and boating on the Missouri River, Yellowstone River, and Fort Peck Lake are available with hunting and trap shooting. Several annual events bring visitors and entertainment to the Culbertson area. These events which attribute to the local economy include:

- Frontier Days & Rodeo (mid-June)
- Roosevelt County Fair (mid-August)
- Labor Day Wagon Train/Trail Ride (Labor Day-September)
- Northeast Montana Antique Association Threshing Bee & Show (late-September)

Chapter 3 Existing Roadway Conditions

3.1 Existing & Projected Traffic Volumes

3.1.1 Existing Traffic Volumes

US 2 and MT 16 are primarily used by local traffic, commercial trucks, and recreational vehicles in the study area. During harvest months, an increase in truck traffic volumes throughout the Study area is primarily due to movement of harvesting vehicles and transport of wheat and sugar beets. Oil truck related traffic is prevalent year round. During summer months, an increase in roadway users and traffic volumes on these routes are primarily due to tourism.

In order to determine a comprehensive Annual Average Daily Traffic (AADT) count for US 2 and MT 16 in the Study area, a weighted AADT was determined. The weighted average is based on yearly traffic counts by section for the most recent ten-year data. It should be noted that traffic counts were not collected in 2010. Table 5 shows the weighted AADT for each segment for each year.

Table 5. Average Annual Daily Traffic

Length (miles)	Location	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
0.305	US 2, entering Culbertson City Limits	1796	1226	1120	1566	1470	1470	1470	1270	1130	1185
0.069	US 2, Junction of MT 16 south	2340	1300	2210	2290	2260	2290	2290	2320	2220	2340
0.389	US 2, Junction of MT 16 north	2345	2026	1905	1800	2140	2140	2135	2115	1645	1920
	US 2 Weighted Average	2125	1641	1619	1751	1883	1886	1883	1796	1491	1664
0.132	MT 16 north, entering Culbertson City Limits	865	900	830	855	940	940	940	1090	885	1020
	MT 16 north Weighted Average	865	900	830	855	940	940	940	1090	885	1020
0.876	MT 16 south, Junction of US 2	1315	1417	1281	1339	1354	1354	1354	1106	1039	1193
2.323	MT 16 south, leave Culbertson City Limits	860	1085	980	960	1160	1130	1305	825	925	940
	MT 16 south Weighted Average	985	1176	1062	1064	1213	1191	1318	902	956	1009

Source: MDT Traffic and Data website

Because local traffic may have increased in the last two years, turning movement data was gathered for four main intersections in the Study area. Turning movement counts were gathered for the intersection of US 2 and MT 16 (north) on September 21, 2011. This intersection was recounted in March 2012 and additional turning movement counts were gathered for the intersections of US 2 and MT 16 (south), MT 16 (south) and 1st Street, and MT 16 (south) and County Road 1020. Each vehicle entering an intersection was lumped into one of the five following categories: car, medium trucks, heavy trucks, bus, or motor bike. Figure 13 shows the total turning movement counts over the course of 24 hours for each of these sites. It should be noted that the March 2012 turning movement counts for the intersection of US 2 and MT 16 (north) did not span a 24-hour window and therefore Figure 13 incorporates the September 2011 data collected for this intersection.

Turning movement counts for each leg were converted to volumes in order to determine the percentage of heavy trucks traveling on each leg of the intersection. These results are shown in Figure 14.

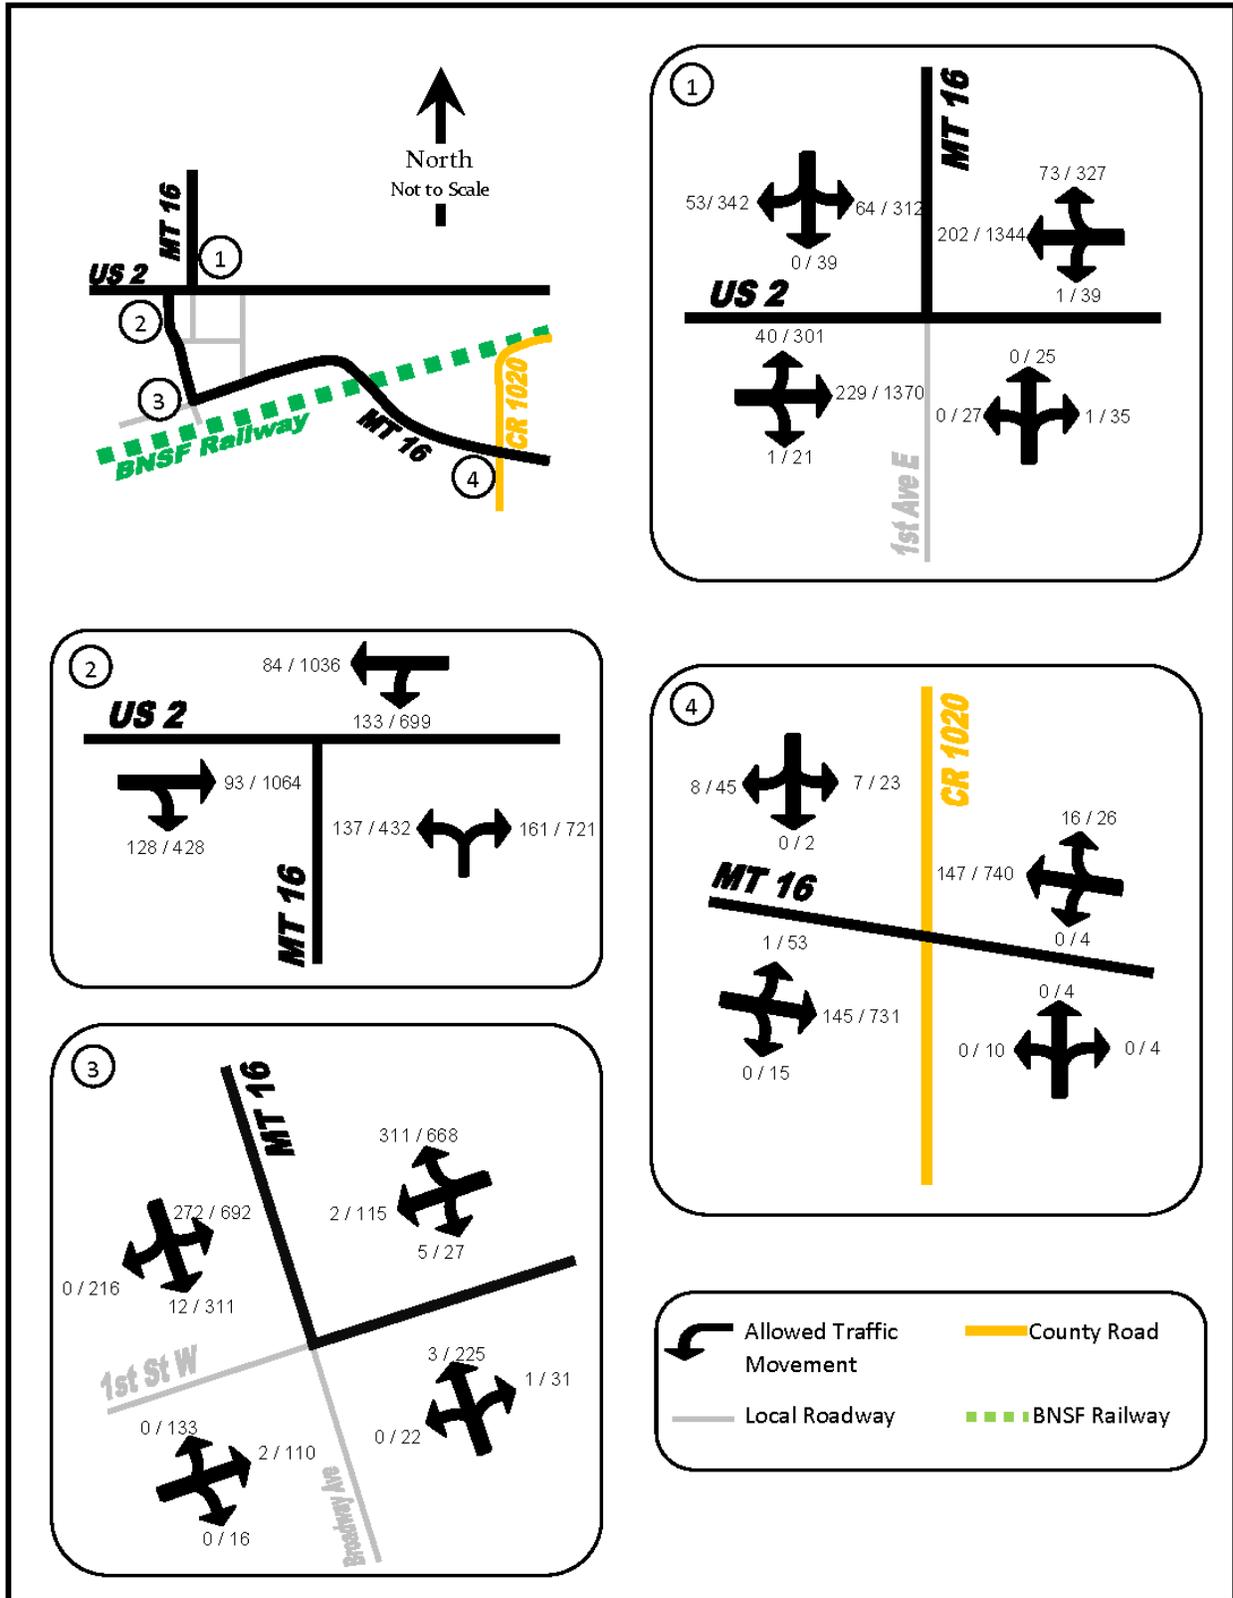


Figure 13. Current 24-Hour Turning Movement Counts (Heavy Vehicle # / Total Vehicle #)

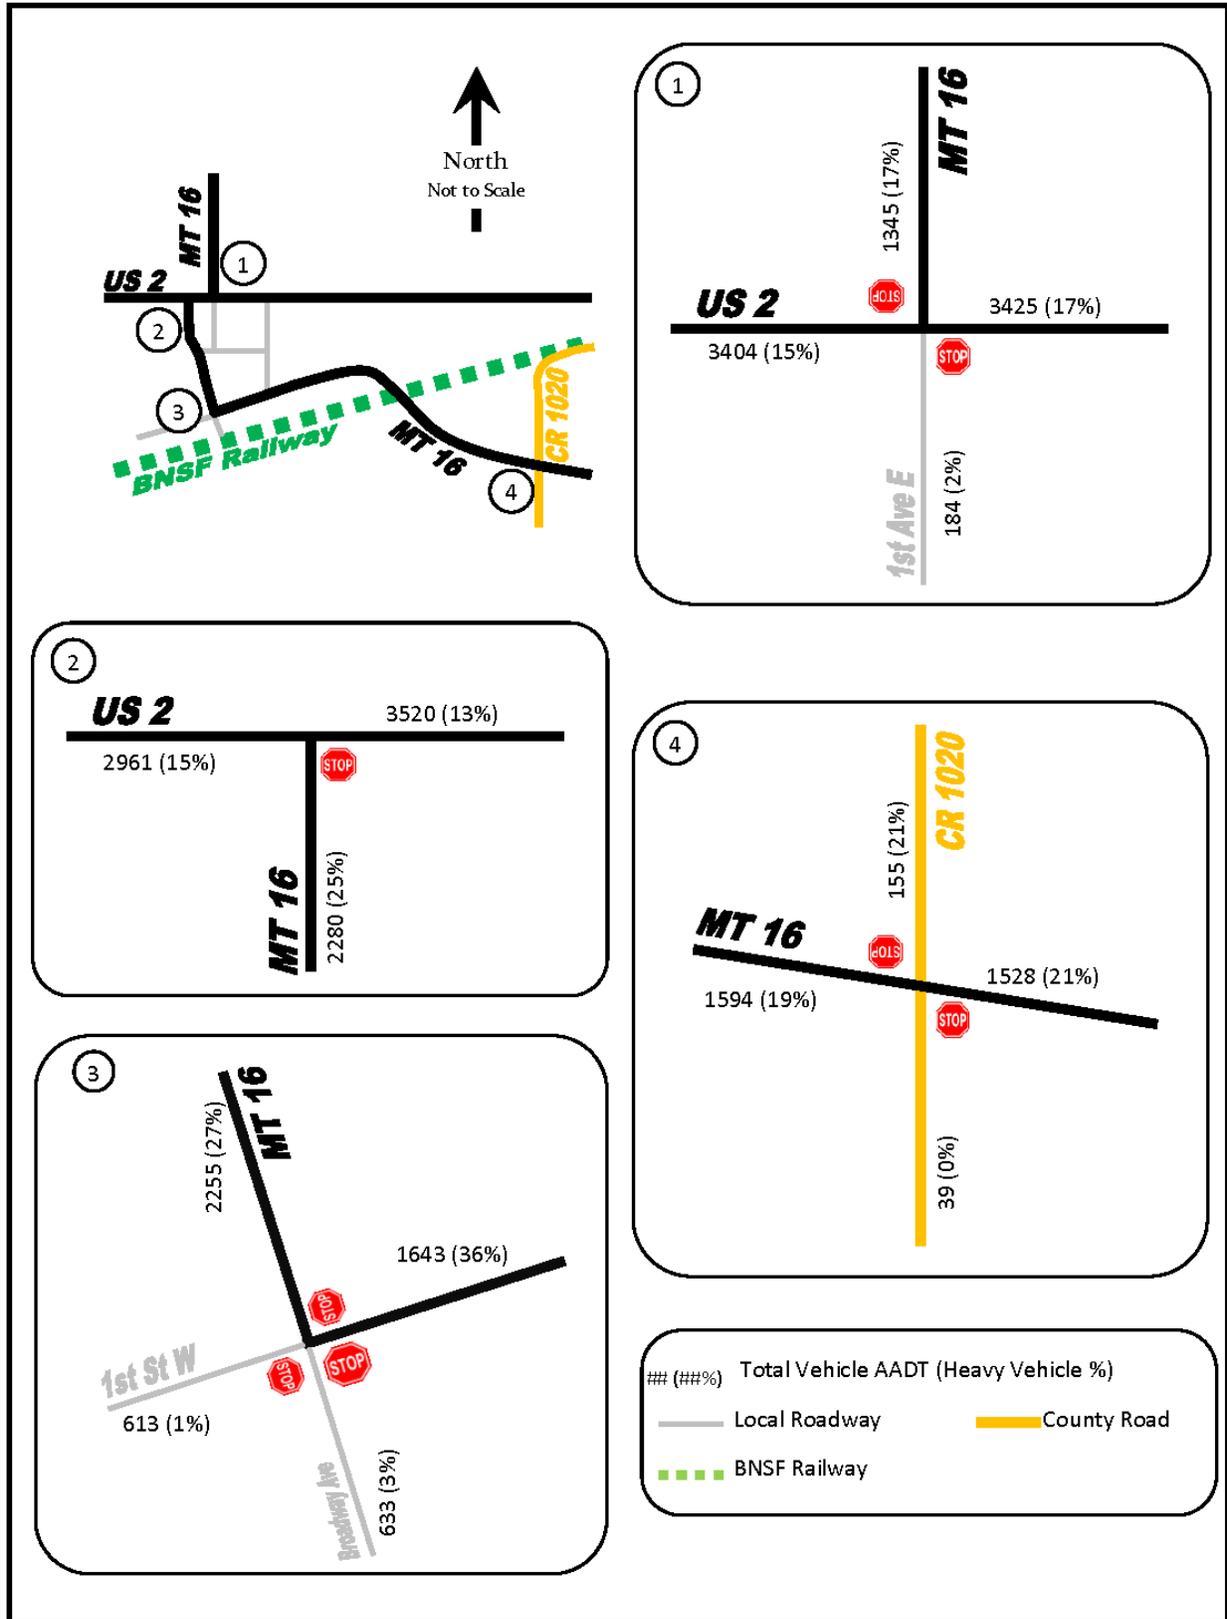


Figure 14. Current AADTs per 24-Hour Turning Movement Counts

All intersections show a high percentage of heavy vehicles on MT 16 and US 2. The intersection of MT 16 (south) and County Road 1020 also shows a high percentage of heavy vehicles on the southbound leg. It has been observed that trucks occupy two lanes to make their turning movements. Truck turning movements and spill containment should be considered if improvement options are carried forward.

Turning movement counts were also used to evaluate the current level of service (LOS) at each intersection. LOS for an intersection is a qualitative measure developed by the transportation profession to quantify driver perception for such elements as travel time, number of stops, total amount of stopped delay, and impediments caused by other vehicles. It provides a scale that is intended to match the perception by motorists of the operation of the intersection. LOS provides a means for identifying intersections that are experiencing operational difficulties, as well as providing a scale to compare intersections with each other. The LOS scale represents the full range of operating conditions. The scale is based on the ability of an intersection to accommodate the amount of traffic using it. The scale ranges from "A" which indicates little, if any, vehicle delay, to "F" which indicates substantial vehicle delay and traffic congestion. LOS was computed using the intersection's peak hour, which was different for each intersection. More detailed information for the 2012 LOS analysis can be seen in Appendix A. Table 6 shows a summary of the LOS for each individual leg of the four intersections studied. Table 6 was based on March 2012 turning movement counts for all legs of all intersections.

Table 6. Current Intersection Level of Service during Peak Hour

ID*	Intersection	EB	WB	NB	SB
1	US 2 and MT 16 (north)	A	A	B	B
2	US 2 and MT 16 (south)	A	A	B	N/A
3	MT 16 (south) and 1 st Street	B	A	A	A
4	MT 16 (south) and CR 1020	A	A	B	B

*Note: ID per Figures 13 and 14 of this report.

(Abbreviations used are as follows: EB = eastbound; WB = westbound; NB = northbound; SB = southbound; N/A = not applicable).

An automatic traffic recorder (ATR) is located along MT 16, north of Culbertson, at approximately RP 88.5, represented as Station A-201. The most recent yearly report for 2011 at this site indicates the month of August experiences the highest volume of traffic with 1,471 vehicles per day. However, Fridays in the month of June experience the highest average daily number of vehicles with 1,651. The percentage of large trucks was recorded to be 9.64% at this location in 2011.

3.1.2 Projected Traffic Volumes

It is difficult to estimate future traffic growth based solely on the most recent historical traffic counts (2000-2009) because local traffic may have increased in the last two years (2010-2011) due to the recent economic conditions in the Culbertson area. A five-year growth rate, which is more indicative of the latest economic activity, was projected by MDT for each roadway. The five-year growth rate for US 2 is

2.6 percent and for MT 16 north and south of US 2 is 3.2 percent and 16.3 percent, respectively. This section provides the analytical approach used to predict the 20-year growth rate.

In order to determine the average growth of traffic in the Study area, the weighted average annual daily traffic (AADT) counts for the most recent ten-year data were plotted. AADT counts for 2010 to 2015 for each roadway were calculated using their respective five-year growth rates and these points were added to each roadway’s graph. Once all data points for 2000-2015 were plotted, a linear regression line for the 15 years of data was plotted. Figures 15, 16, and 17 show the 15-year linear regressions for US 2, MT 16 (south) and MT 16 (north), respectively. The slope of the linear regression line shows a potential yearly increase in AADT.

Figure 15. 15-Year Growth

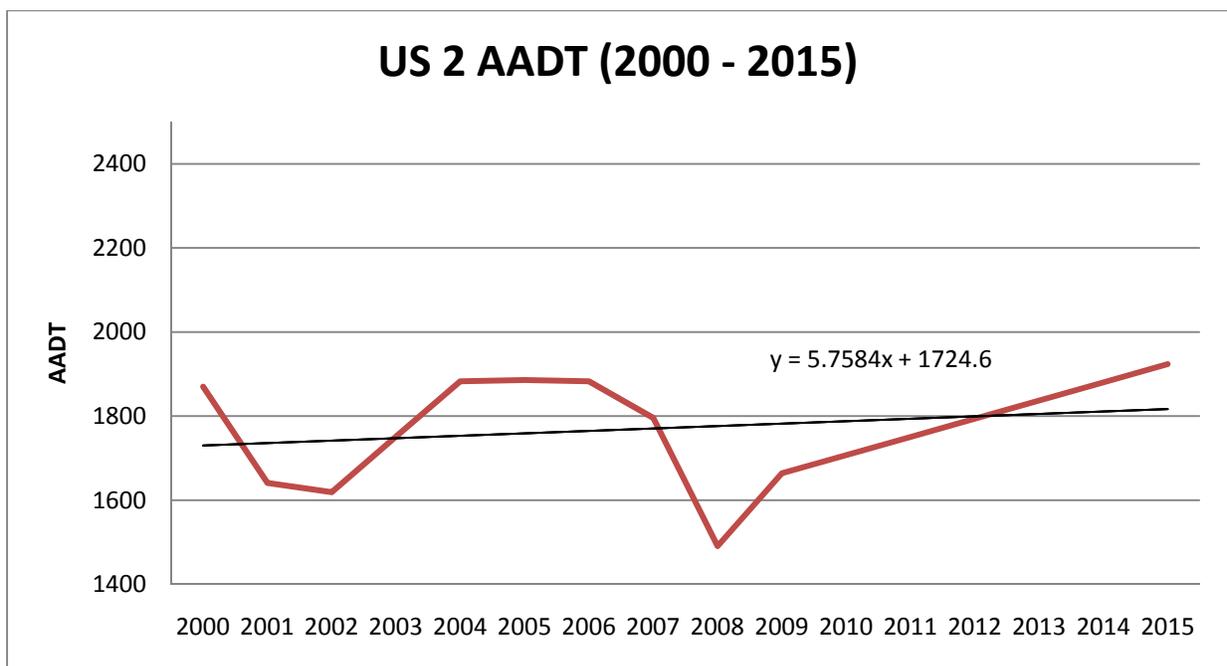


Figure 16. 15-Year Growth Rate for MT 16 (South)


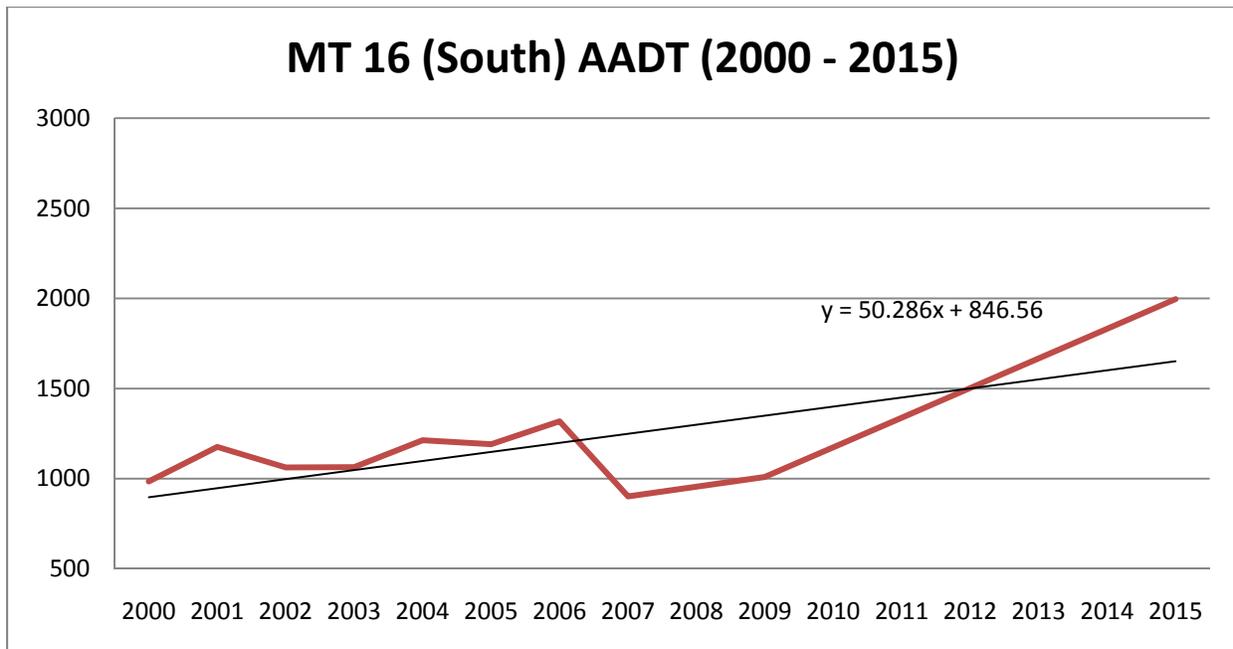


Figure 17. 15-Year Growth Rate for MT 16 (North)

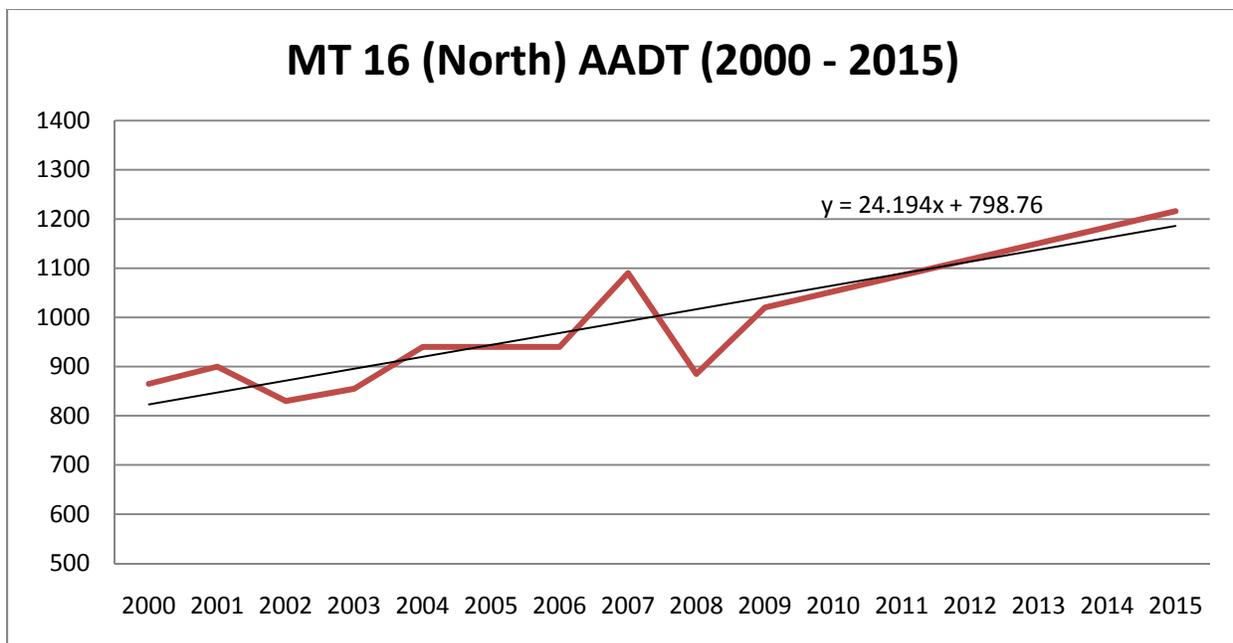

Once the slope of each linear regression line was calculated, future traffic volumes were projected from the 2015 value. The following equation was used to calculate each subsequent year's AADT:

Formula 1. $A_{future} = m(year - 2015) + A_{present}$

Where: A_{future} = Future AADT
 m = slope of the roadway's linear regression line
 year = the future year whose AADT is being calculated (e.g. 2016)
 $A_{present}$ = the 2015 AADT of the roadway

In essence, the linear regression line was transposed onto the end of the 2015 data. Figures 18 through 21 show the historical and projected growth of each roadway. Specific AADT data points for each year can be found in Appendices B through D of this Technical Memorandum.

Figure 18. US 2 AADT (2000-2032)

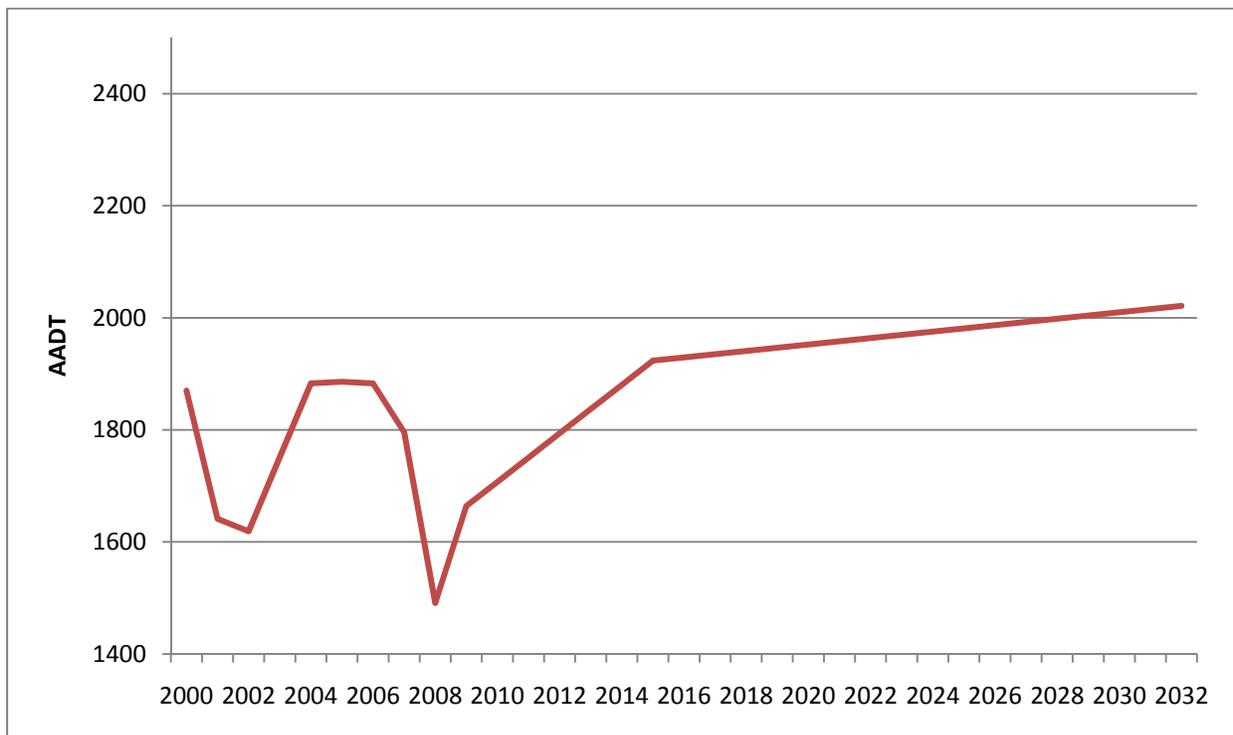


Figure 19. MT 16 (South) AADT (2000-2032)


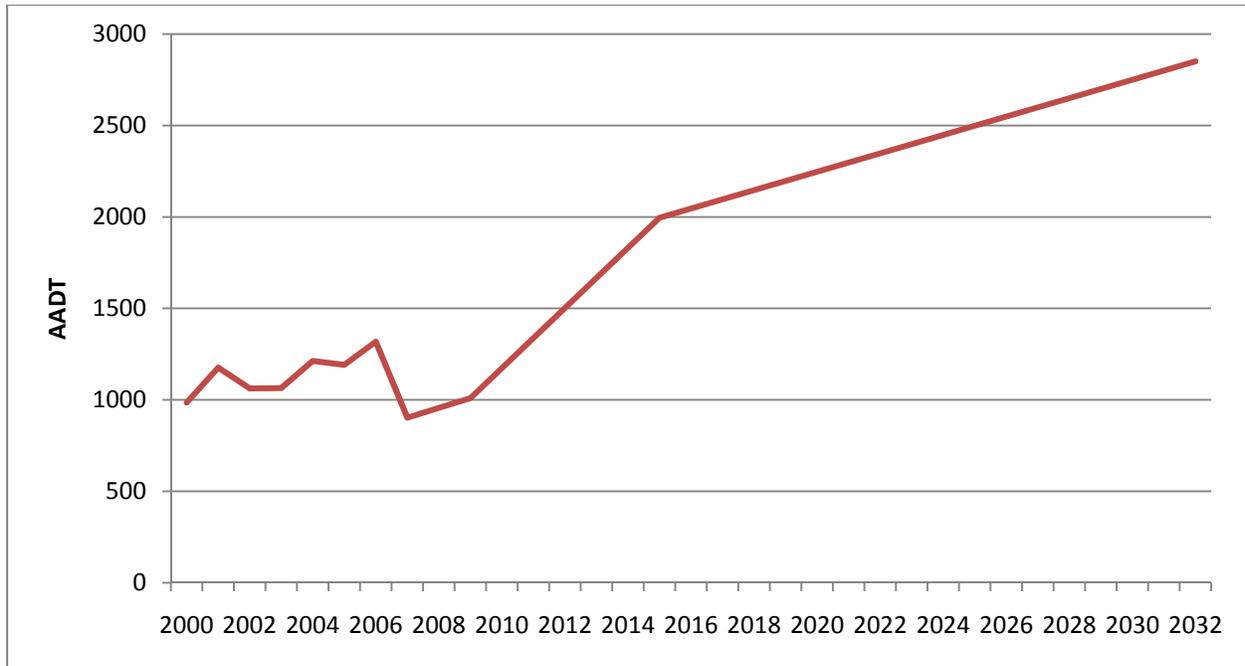


Figure 20. MT 16

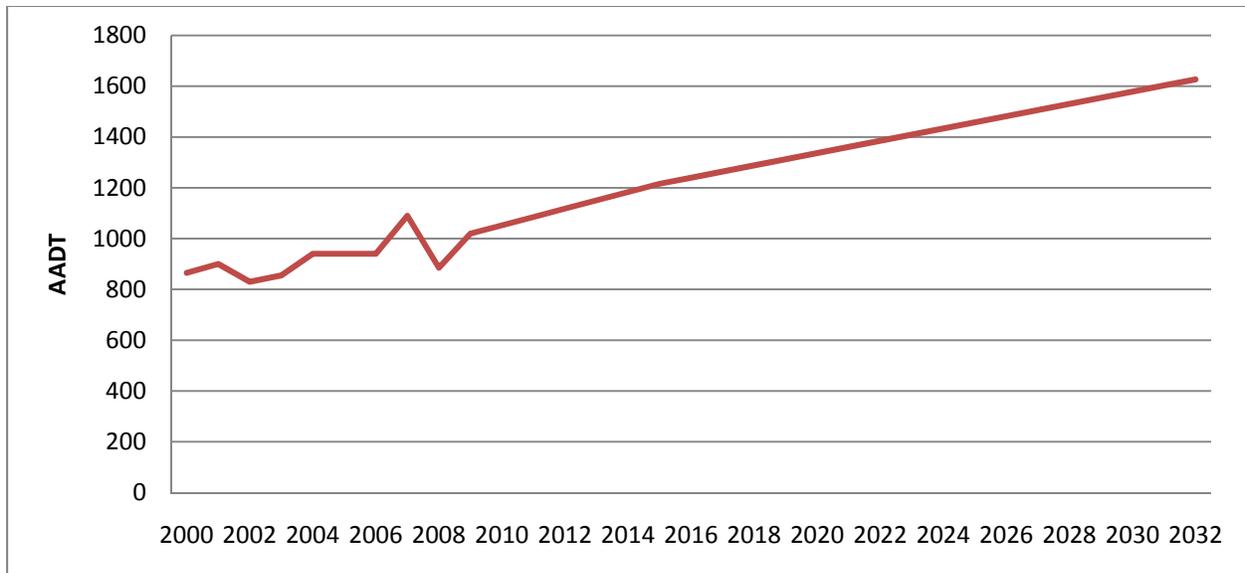

After plotting the 2106 to 2032 projected AADT counts, the slope of this data was calculated using the following formula:

Formula 2.
$$PR = \frac{(A_{future} - A_{present})}{A_{present}} * 100$$

$$\text{Years}$$

Where: PR=Percent Rate


A_{future}= Future AADT

A_{present}= Present AADT

Years=Number of years between A_{future} and A_{present}

The growth rates for US 2, MT 16 (south), and MT 16 (north) are 0.32 percent, 2.52 percent, and 1.99 percent, respectively. While the analytical method to calculate traffic growth on US 2 produced a 0.32 percent growth rate, a growth rate of 1.0 percent is a typical adjustment for areas with minimal or negative historical growth. Based on the anticipated growth in the Culbertson area over the next 10 to 15 years, a 1.5 percent growth rate is being assumed. Formula 2 was used to calculate each year's AADT. Figure 21 shows the historical and projected AADT for US 2 using the 1.5 percent growth rate from 2016 to 2032.

Figure 21. Revised US 2 AADT (2000)

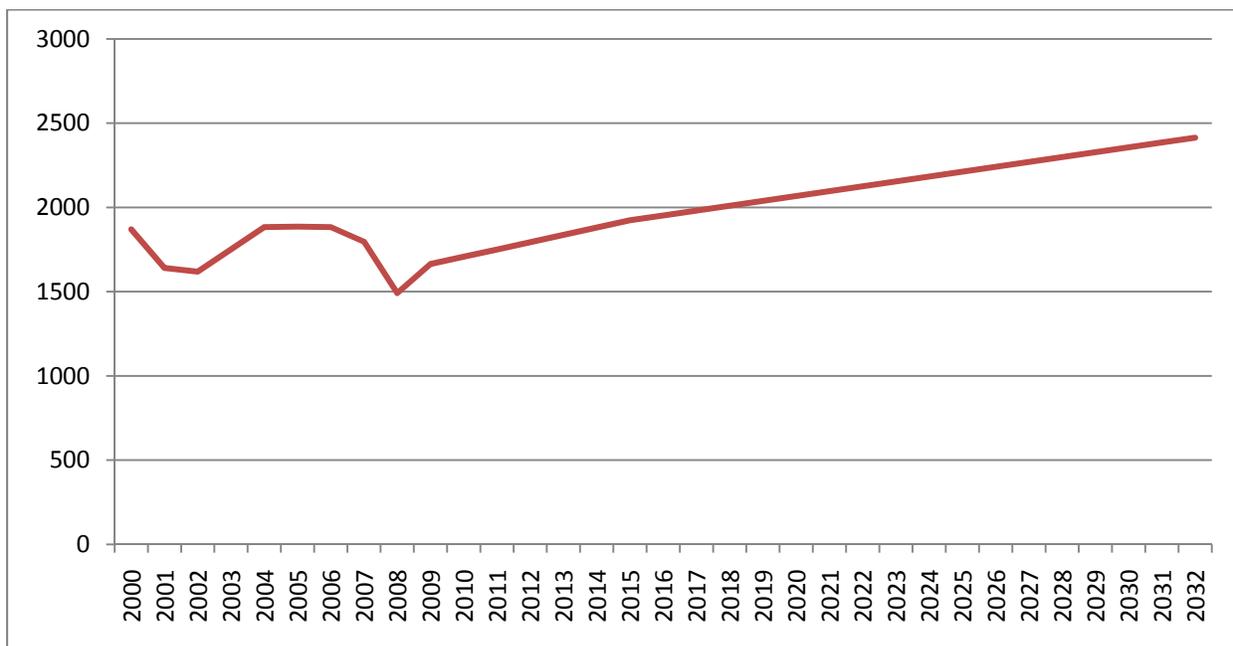

Based on the most recent ten-year weighted AADT and the five-year growth rate (more indicative of the latest economic activity) for US 2, MT 16 (south) and MT 16 (north), the horizon-year projected growth rates for these roadways are 1.50 percent, 2.52 percent, and 1.99 percent, respectively. There is a possibility that the region may experience higher (or lower) traffic growth as a result of the Bakken oil boom. The calculated projections are best estimates based on currently available information. All other legs of the studied intersections were assumed to have 1.0 percent growth.

Projected LOS was computed using the intersection's turning movement counts during the intersection's peak hour noted in Table 6 and increased by their respective growth rates. Table 7 shows the LOS for

each individual leg of the four intersections studied for the horizon year 2032. Appendix E contains more detail regarding 2032 projected LOS.

Table 7. 2032 Intersection Level of Service during Peak Hour

ID*	Intersection	EB	WB	NB	SB
1	US 2 and MT 16 (north)	A	A	B	B
2	US 2 and MT 16 (south)	A	A	B	N/A
3	MT 16 (south) and 1 st Street	B	A	A	A
4	MT 16 (south) and CR 1020	A	A	A	B

*Note: ID per Figures 13 and 14 of this report.

(Abbreviations used are as follows: EB = eastbound; WB = westbound; NB = northbound; SB = southbound; N/A = not applicable).

In summary, even though the overall traffic projections are for increased traffic through each of the four intersections, the level of service for the intersections is not projected to change over the next 20 years.

3.2 *Right-of-Way and Jurisdictions*

The existing corridors of US 2 and MT 16 within the study area are located primarily within private property. The State of Montana maintains the right-of-way on each side of the highway. BNSF Railway infrastructure and right-of-way is located parallel to US 2 within the corridor Study area. Other property within the Study area includes local government land as well as Montana State Trust Lands, as shown in Figure 22. As improvement options develop, right-of-way impacts will be minimized to the extent practicable. If a project is advanced from this study, potential right-of-way acquisition will be accomplished in accordance with applicable laws.

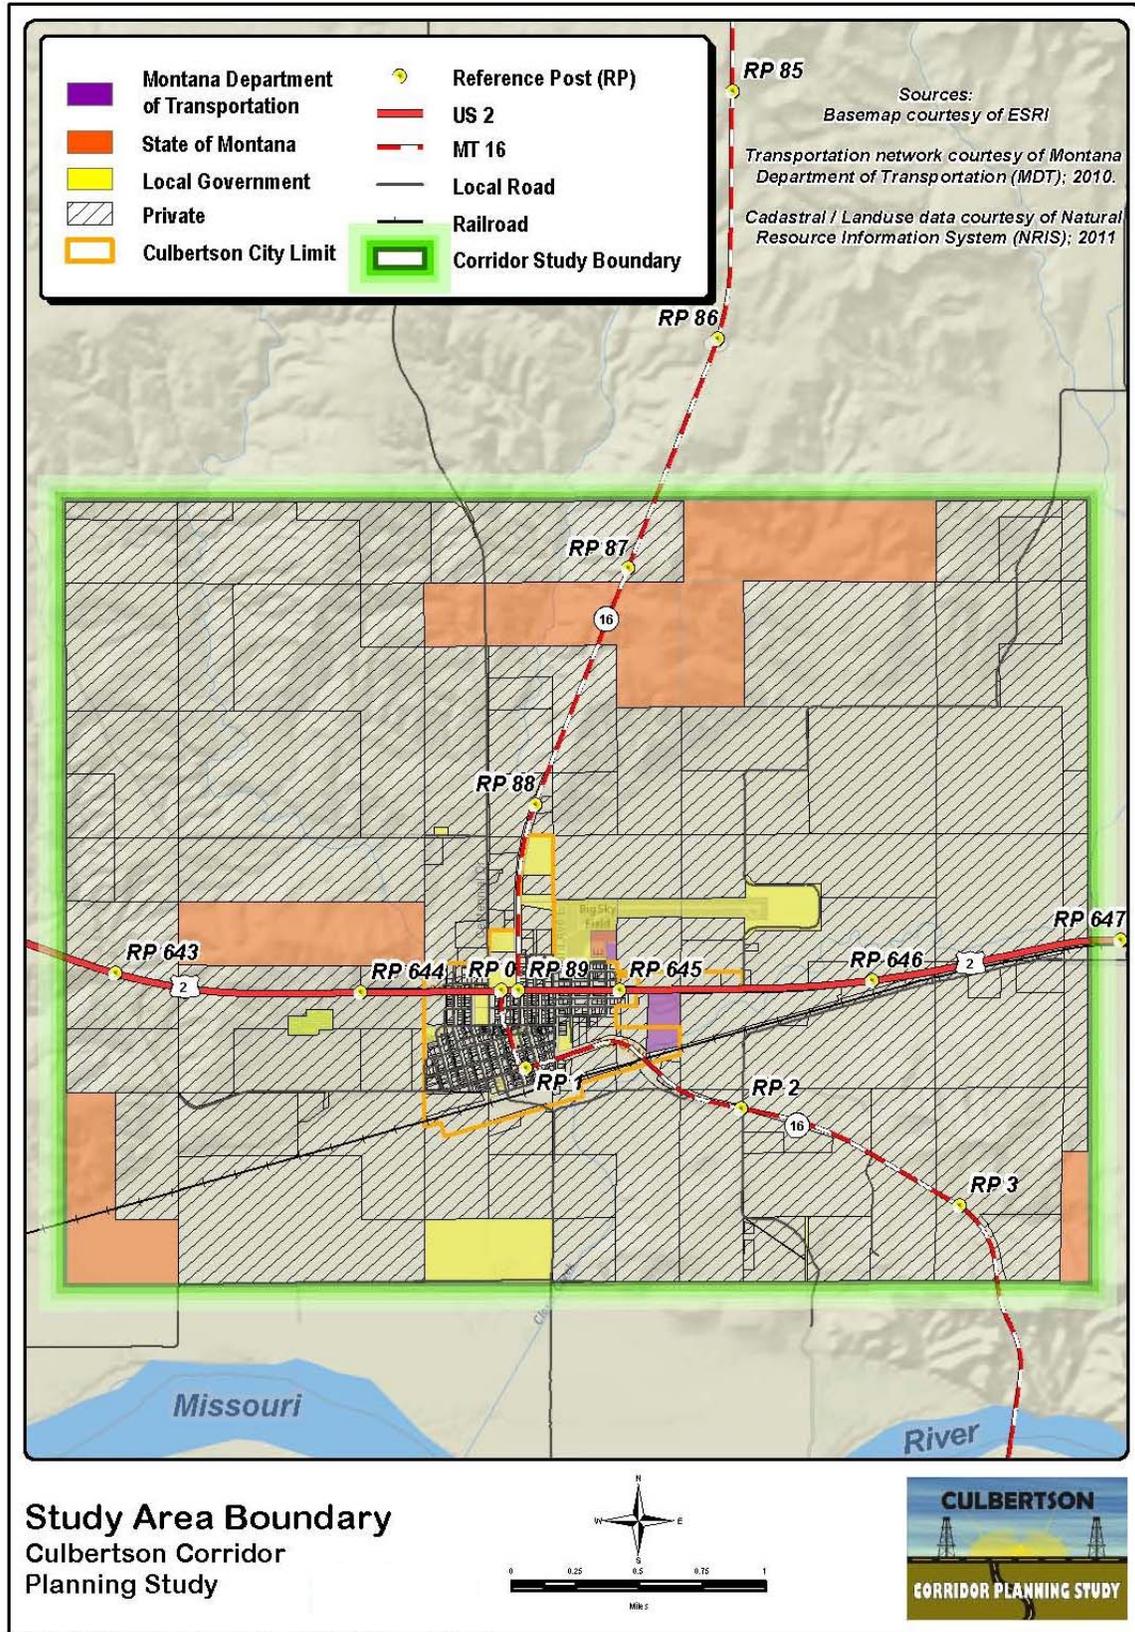


Figure 22. Land Ownership in Study Area

The right-of-way widths along US 2 and MT 16 generally vary from 33 feet to 120 feet on each side of centerline. Table 8 shows the right-of-way widths along US 2 and MT 16 according to as-built construction drawings.

Table 8. Right-of-Way Widths

Approximate RP Location	ROW Width on West/South Side from centerline	ROW Width on East/North Side from centerline
US 2 - RP 642.8 to RP 646.8 As-Built Project: FAP #F-84(20), West of Wolf Point-North		
642.48	100'	100'
642.77	100' – 260'	80'
642.89	100'	80'
643.00	100'	120'
643.04	120'	120'
643.09	100'	100'
643.29	80'	80'
643.46	90'	120'
643.67	80'	80'
644.33	43'	33'
644.37	33'	33'
644.82	53'	53'
644.99	80'	80'
646.26	50'	80' – 200'
646.30	50'	160'
646.61	50'	80
647.27	50'	90
647.55	50'	80
MT 16 (N-22) North of US 2 from RP 86.6 to RP 88.6 As-Built Project: FAP #F-193(9), Culbertson-Plentywood		
86.86	80'	90'
87.29	100'	90'
87.38	100'	120'
87.41	100'	80'
88.60	80'	80'
88.64	80'	33'
88.74	33'	33'
MT 16 (N-62) South of US 2 from RP 0 to RP 3 As-Built Projects: FAP #F-273(10) Sidney-Culbertson & FAP #273-A Culbertson-Sidney Hwy.		
0.00	44'	44'
0.32	33'	33'

Table 8 Right-of-Way Widths (cont.)

Approximate RP Location	ROW Width on West/South Side from centerline	ROW Width on East/North Side from centerline
0.48	40'	100'
0.73	40' – 400'	40'
0.84	70'	50'
1.06	60'	50' – 430'
1.32	50'	60'
1.70	40'	60'
2.18	40'	50'
2.64	60'	110'
2.91	70'	120'

3.3 *Physical Characteristics*

US 2 is a major east/west highway providing a vital national link between the states of Washington and Michigan. MT 16 is a major north/south highway providing a vital regional link between Interstate 94 and Canada. US 2 and MT 16 within the Study area are two lanes, one in each direction, with varying shoulder widths, interspersed parallel parking, and sidewalks on portions through town. Approximately one-quarter mile east of the Culbertson city limits along US 2, there are both an eastbound right turn lane and westbound left turn lane to the weigh station and rest area located on the south side of the highway. The posted speed limits along both US 2 and MT 16 through the Study area vary from 25 mph to 70 mph. Each time the posted speed limit is 75 mph, a 60 mph truck speed limit is also posted. Figure 23 shows the posted speed limits through the Study area.

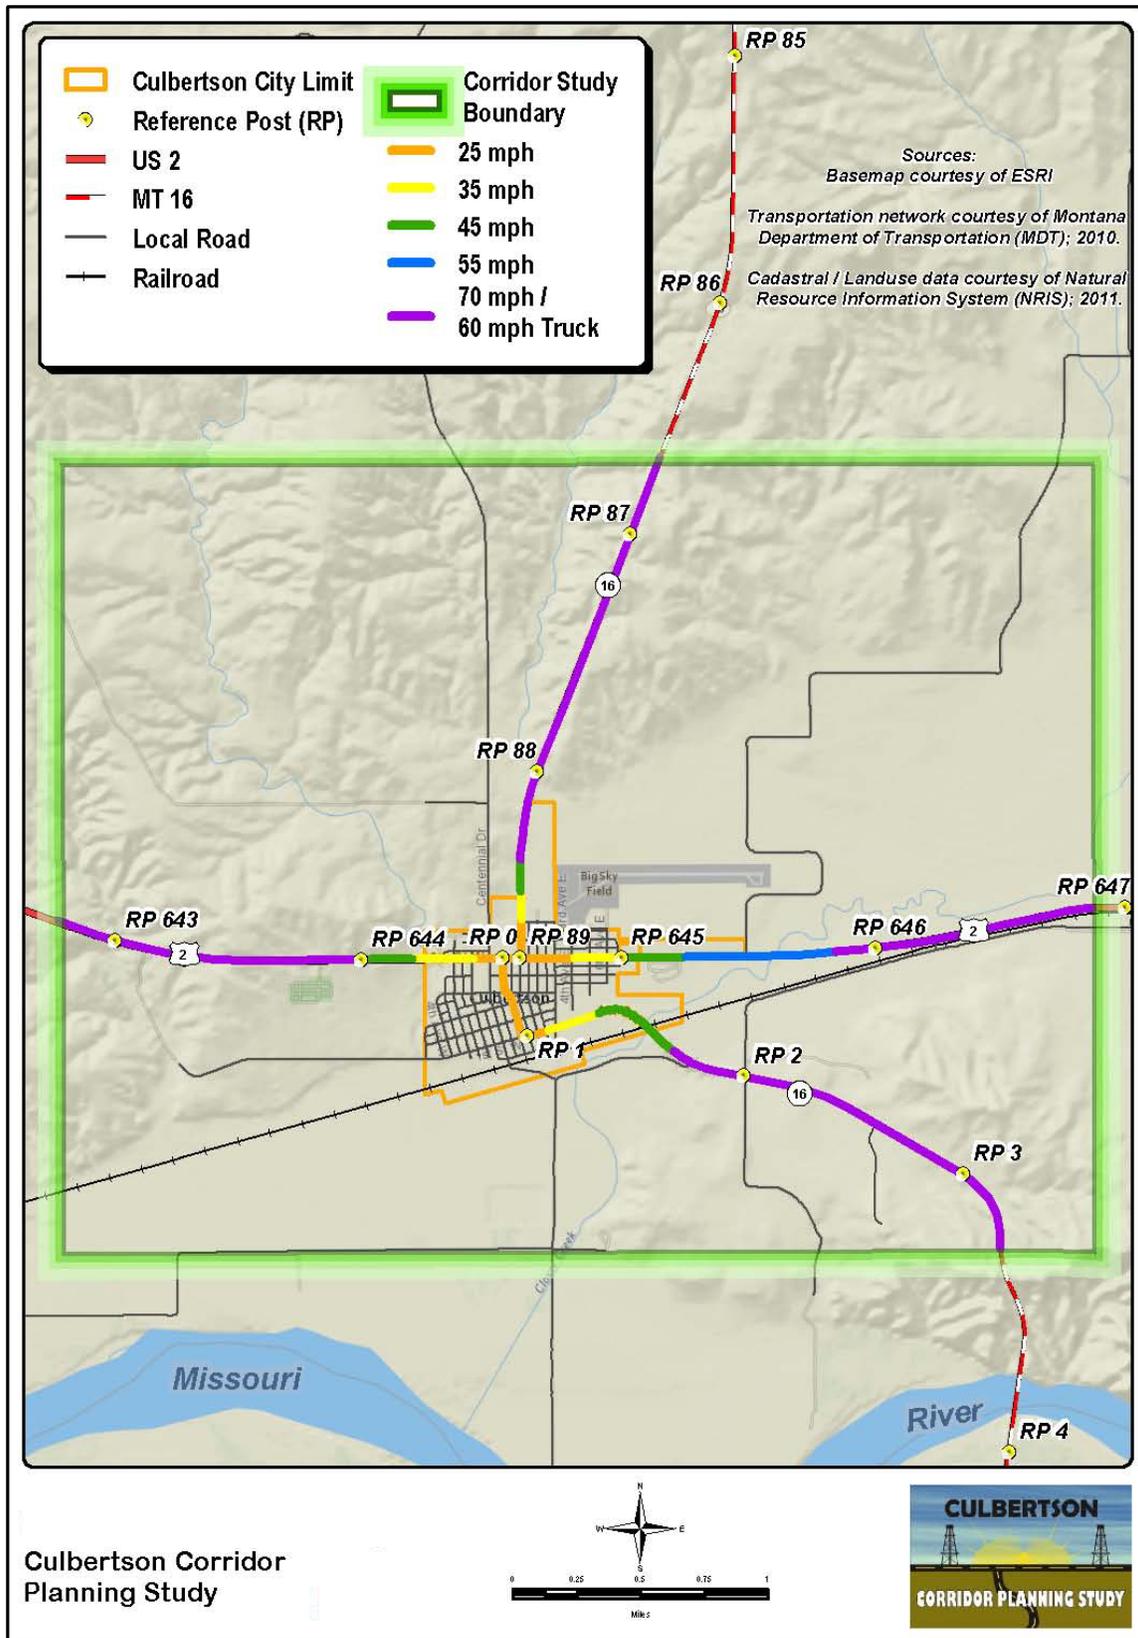


Figure 23. Posted Speed Limits

The portion of US 2 to the east of Culbertson and MT 16 north of US 2 are part of the Theodore Roosevelt Expressway. The Theodore Roosevelt Expressway is the northern third of the Ports to Plains Trade Corridor, which is a planned multimodal transportation corridor that will facilitate the efficient transportation of goods and services from Mexico to Canada.

There are two distinct sections of MT 16 through the corridor with different reference posts for each portion of MT 16 being separated by US 2. The southern section of MT 16 enters the south side of the Study area at RP 3 and continues northwest over the BNSF Railway Bridge, heads west along 1st Street, turns north on Broadway Avenue, and intersects US 2 at RP 0. MT 16 then continues east and is concurrent to US 2 for one block before heading north to begin the northern portion of MT 16 at RP 88.6 and continues north to RP 86.6.

The most recent reconstruction project within the Study area was completed in 1989 and was located on MT 16 from RP 2.79 to the Missouri River Bridge, which is located just south of the corridor Study area.

3.4 *Design Standards*

The MDT *Road Design Manual* identifies design standards which determine the overall operational characteristics of the roadway and enhance the aesthetic appearance of the highway. The geometric design standards for the Culbertson Corridor Planning Study are based on current MDT design criteria for a National Highway System (NHS) Non-Interstate Rural and Urban Principal Arterials. Through the Town of Culbertson, MDT Urban design standards apply if improvement options are further developed from this Study.

The design speed for a roadway depends on the type of terrain, anticipated operating speed, adjacent land use, and the functional classification of the highway. In rural areas such as Culbertson, topography and the functional classification are generally the controlling factors. The MDT *Road Design Manual* describes the following definitions in determining the type of terrain for a roadway:

- Level Terrain: The available stopping sight distances are generally long or can be made to be so without construction difficulty or major expense.
- Rolling Terrain: The natural slopes consistently fall below and rise above the roadway and occasional steep slopes offer some restriction to horizontal and vertical alignment.
- Mountainous Terrain: Longitudinal and traverse changes in elevation are abrupt and extensive grading is frequently needed to obtain acceptable alignments.

According to the terrain definitions, the Study area outside of the Town of Culbertson primarily occurs in level terrain (70 mph design speed) with some areas of rolling terrain (60 mph design speed). Table 9 lists the design standards for Rural and Urban Principal Arterials according to current MDT design criteria.

Table 9. Geometric Design Criteria for Rural and Urban Principal Arterials (National Highway System – Non Interstate) U.S. Customary

Design Element		Design Criteria						
Design Controls	Functional Classification	Rural Principal Arterial			Urban Principal Arterial			
					Curbed	Uncurbed		
	Design Forecast year	20 Years						
	*Design Speed	Level	70 mph			40 - 45 mph	40 - 50 mph	
		Rolling	60 mph					
Mountainous		50 mph						
Level of Service	Level/Rolling: B Mountainous: C			Desirable: B Minimum: C				
Roadway Elements	*Travel Lane Width	12'						
	*Shoulder Width	Outside	Varies					
	Cross Slope	*Travel Lane	2% Typical					
		Shoulder	2% Typical					
	Median Width	Varies			N/A			
TWLTW Width	N/A			16'				
Earth Cut Sections	Ditch	Inslope	6:1 (Width: 10')			N/A	6:1 (Des\4:1 Min)	
		Width	10' Minimum			N/A	10' Min	
		Slope	20:1 towards back slope			N/A	20:1 towards back slope	
	Back Slope; Cut Depth at Slope Stake	0' - 5'	5:1					
		5' - 10'	Level/Rolling: 4:1; Mountainous: 3:1					
		10' - 15'	Level/Rolling: 3:1; Mountainous: 2:1					
		15' - 20'	Level/Rolling: 2:1; Mountainous: 1.5:1					
		> 20'	1.5:1					
Earth Fill Slopes	Fill Height at Slope Stake	0' - 10'	6:1					
		10' - 20'	4:1					
		20' - 30'	3:1					
		> 30'	2:1					
Alignment Elements	DESIGN SPEED	50 mph	60 mph	70 mph	40 mph	45 mph	50 mph	
	*Stopping Sight Distance	425'	570'	730'	305'	360'	425'	
	Passing Sight Distance	1835'	2135'	2480'	N/A	N/A	760'	
	*Minimum Radius	760'	1200'	1810'	533'	711'	711'	
	*Superelevation Rate	e _{max} = 8.0%			e _{max} = 4.0%		e _{max} = 8.0%	
	*Vertical Curvature (K-value)	Crest	84	151	247	44	61	84
		Sag	96	136	181	64	79	96
	*Maximum Grade	Level	3%			6%		
		Rolling	4%			7%		
		Mountainous	7%			9%		
Minimum Vertical Clearance	17.0'							

Source: Montana Department of Transportation Road Design Manual Chapter 12, Figures 12-3 & 12-7 "Geometric Design Criteria for Rural and Urban Principal Arterials"

*Controlling design criteria (see Section 8.8 of the MDT Road Design Manual)

3.5 **Roadway Geometrics**

The roadway geometric design elements within the Culbertson Corridor Planning Study were evaluated to identify areas of concern that do not meet current MDT design standards. This analysis was based on available as-built construction drawings. The segments of US 2 and MT 16 *within* the city limits of Culbertson were compared to current MDT design standards for Urban Principal Arterials and areas outside of the city limits are compared to Rural Principal Arterial standards.

MT 16 undergoes several directional changes within the study area, particularly at four intersections. The intersection of US 2 and MT 16 (north)/1st Avenue East, is a four-legged intersection with two-way stop control on MT 16 (north)/1st Avenue East. Lane configurations on all four-legs are currently shared left/thru/right turning movements. The intersection of US 2 and MT 16 (south)/Broadway Avenue is a T-intersection with stop control on MT 16 (south)/Broadway Avenue. The lane configurations at this intersection include a shared thru/right on US 2 eastbound, shared thru/left on US 2 westbound, and shared left/right on MT 16 (south)/Broadway Avenue. The intersection of MT 16/Broadway Avenue and 4th Street is a skewed intersection with two-way stop control on 4th Street. Lane configurations on all four legs of the intersection have shared left/thru/right turning movements. The intersection of MT 16/Broadway Avenue and 1st Street is a four-legged intersection with shared left/thru/right lane configurations. The intersection is three-way stop controlled, with no stop control on MT 16 southbound leg.

The Culbertson School District is located between US 2 and 4th Street and 2nd Avenue West and 1st Avenue West. It should be noted that the school bus loading and unloading facility is located along 4th Street West, between 2nd Avenue West and 1st Avenue West, and off the US 2 and MT 16 highway system.

The findings of the roadway geometrics within the Study area discussed in greater detail in the following sections.

3.5.1 **Horizontal Alignment**

The horizontal alignments of US 2 and MT 16 have a major influence on traffic operation and safety and are comprised of elements including curvature, superelevation, and sight distance. The parameters defining horizontal alignment are directly related to the type of terrain and associated design speed.

A summary of the horizontal alignment curvature for both US 2 and MT 16 is presented in Table 10. The table includes the approximate reference post (RP) location of the center of the curve, length, and radius. Two curves along MT 16, near the intersection of Broadway Avenue and 4th Street West, do not meet the current minimum MDT design standards for an Urban Principal Arterial with a design speed of 40 mph. The curve length at RP 647.80 on US 2 does not meet current standards for level terrain. Four curves along MT 16 at the south end of the study area do not meet current standards for level terrain. Cells within Table 10 shaded in blue are segments within city limits and therefore subject to urban design standards.

Table 10. Horizontal Alignment

Approximate RP of Curve Center	Radius (ft)	Length (ft)
US 2 - RP 642.8 to RP 646.8 As-Built Project: FAP #F-84(20), West of Wolf Point-North (1956)		
643.27	11,460.0	3,960.0
645.98	22,920.0	4,686.7
646.87	5,730.0	1,553.3
647.80	11,460.0	1,006.7
MT 16 (N-22) North of US 2 from RP 86.6 to RP 88.6 As-Built Project: FAP #F-193(9), Culbertson-Plentywood (1959)		
85.90	5,730.0	2,101.7
88.18	5,730.0	2,190.0
MT 16 (N-62) South of US 2 from RP 0 to RP 3 As-Built Projects: FAP #F-273(10) Sidney-Culbertson (1959) & FAP #273-A Culbertson-Sidney Hwy (1933) ¹		
0.13	134.5	94.0
0.15	185.1	179.2
0.47	2,865.0	2,000.0
0.72	636.6	864.1
0.96	1,432.5	1,153.3
1.64	5,730.0	1,825.0
2.47	1,273.3	1,405.2
2.77	1,146.0	544.3
2.97	1,432.5	798.3

*Values shown in red do not meet current MDT design standards for level terrain (outside the city limits) or urban (within city limits) design standards. (See Table 9 for standards)

1. Approximate locations are shown as mile posts rather than reference posts.

3.5.2 Vertical Alignment

The vertical alignment is a measure of elevation change of a roadway. The length and steepness of grades directly affects the operational characteristics of the roadway. The MDT *Road Design Manual* lists recommendations for maximum grades on rural and urban principal arterials according to the type of terrain in the area. Table 11 shows the maximum grade recommendations according to terrain.

Table 11. Maximum Grade

Terrain	Maximum Grade
Level – Rural	3%
Rolling – Rural	4%
Level – Urban	6%
Rolling - Urban	7%

The grade and terrain throughout the corridor varies from level to rolling and goes from rural to urban. The alignment grades within Culbertson are relatively flat and meet maximum grade standards for urban principal arterials. However, outside the city limits, five vertical curves have grades greater than 4%, which exceeds the maximum grade for rolling terrain standards (4%). Other controlling design factors for vertical alignments include the rate of vertical curvature (K-value) and stopping sight distance, which are both dependent on the type of terrain and design speed within the Study area.

Table 12 shows vertical alignment information based on available as-built drawings. Outside the city limits of Culbertson, ten vertical curves do not meet current MDT design standards for level terrain. Vertical alignments within the city limits, shaded in blue in the table, meet current MDT design standards for Urban Principal Arterials with a design speed of 40 mph.

Table 12. Vertical Alignment

Approximate RP of Curve Center	Type of Curve	Length (ft)	Grade In (G1)%	Grade Out (G2)%	K-Value	Stopping Sight Distance (SSD) (ft)
US 2 - RP 642.8 to RP 646.8						
As-Built Project: FAP #F-84(20), West of Wolf Point-North (1956)						
642.63	Crest	836	-0.990	-4.160	263.7	754.44
643.09	Sag	1,000	-4.160	1.900	165.0	673.93
643.61	Crest	1,200	1.900	-2.800	255.3	742.32
643.95	Sag	400	-2.800	-3.300	800.0	2,358.24
644.24	Sag	600	-3.300	-1.050	266.7	1,743.6
644.57	Sag	400	-1.050	0.050	363.6	-
644.74	Crest	200	0.050	-0.210	769.2	4,250.46
644.91	Sag	200	-0.210	0.110	625.0	-
645.07	Crest	200	0.110	-0.344	440.5	2,476.92
645.5	Sag	200	-0.344	0.000	581.4	-
645.68	Sag	400	0.000	0.550	727.3	-
646.15	Crest	400	0.550	0.000	727.3	2,162.04
646.6	Sag	500	0.000	0.970	515.5	-
646.84	Crest	600	0.970	-0.100	560.7	1,308.52
647.1	Crest	200	-0.100	-0.330	869.6	4,791.83

Approximate RP of Curve Center	Type of Curve	Length (ft)	Grade In (G1)%	Grade Out (G2)%	K-Value	Stopping Sight Distance (SSD) (ft)
MT 16 (N-22) North of US 2 from RP 86.6 to RP 88.6 As-Built Project: FAP #F-193(9), Culbertson-Plentywood (1959)						
86.46	Crest	1,200	4.660	0.130	264.9	756.12
86.69	Sag	800	0.120	4.660	176.2	713.89
86.99	Crest	1,400	1.980	0.120	752.7	1,274.55
87.84	Crest	1,800	4.020	1.980	882.4	1,379.97
88.12	Sag	1,000	1.220	4.020	357.1	1,520.76
88.48	Crest	400	0.792	1.220	934.6	-
MT 16 (N-62) South of US 2 from RP 0 to RP 3 As-Built Projects: FAP #F-273(10) Sidney-Culbertson (1959) & FAP #273-A Culbertson-Sidney Hwy (1933) ¹						
0.44	Crest	200	2.020	0.440	126.6	782.99
0.51	Sag	300	-0.290	2.020	129.9	970.19
0.84	Crest	200	0.660	-0.290	210.5	1,235.92
0.93	Sag	200	-0.340	0.660	200.0	-
1.13	Sag	300	-3.260	-0.340	102.7	542.56
1.27	Crest	200	-1.420	-3.260	108.7	686.48
1.41	Sag	300	-4.580	-1.420	94.9	475.74
1.55	Crest	400	1.240	-4.580	68.7	385.14
1.69	Sag	300	-3.100	1.240	69.1	327.34
1.85	Crest	200	-2.060	-3.100	192.3	1,137.62
1.96	Sag	200	-3.160	-2.060	181.8	-
2.12	Crest	700	-0.350	-3.160	249.1	734.03
2.40	Sag	300	-3.770	-0.350	87.7	425.03
2.68	Crest	500	6.000	-3.770	51.2	332.34

Values shown in red do not meet current MDT design standards for level terrain (outside the city limits) or design standards for urban sections (within city limits). Values in blue exceed the maximum grade of 4% for rolling terrain.

1. Approximate locations are shown as mile posts rather than reference posts.

3.5.3 Roadside Safety (Clear Zone)

The roadside clear zone, starting at the edge of the traveled way, is the total roadside border area available for safe use by errant vehicles. The area may consist of a shoulder, a recoverable slope, a non-recoverable slope, and/or a recovery area. The desired width varies depending on traffic volumes, speeds, and roadside geometry. Clear zones are evaluated individually and based on the roadside cross section. The urban section through Culbertson has substantial development such as sidewalks, signs, buildings, utilities, and lighting; and it may be impractical to protect or remove the obstacles within the clear zone. Obstructions in the clear zone may cause sight distance issues and with the influx in truck traffic, this may pose as a safety concern as well. Current MDT standards establish clear zone guidelines

in rural and urban sections. As improvement options develop, roadside clear zones should be designed, to the extent practicable, to meet current MDT urban and rural design standards.

Parallel parking is provided on both sides of MT 16 south from 4th Street to the intersection of 1st Street West and 3rd Avenue East. The portion of MT 16 from 4th Street to US 2 also has areas on both sides of the street for parking, although it is not clear whether the surface width in this section is adequate to safely accommodate both heavy vehicle traffic and parallel parking. Wide shoulders along the north side of US 2 from 1st Avenue West to 4th Avenue East provide availability for parallel parking.

3.5.4 Intersection Sight Distance

Adequate sight distance at intersection corners is important for safe vehicle access and turning movements and also based on the type of traffic control at the intersection. Sight obstructions may vary from buildings, parked or turning vehicles, trees, hedges, tall crops, or un-mowed grass. If sight obstructions exist within the sight triangle, it is suggested they be removed or modified in order to heighten driver's view of approaching vehicles. Intersection sight distance was examined at four intersections within the study area. Intersection sight distance obstructions are summarized below:

- US 2 & MT 16 (north of US 2) – the southwest, southeast, and northeast quadrants have obstructions including signs, buildings, and potential parked/turning vehicles.
- US 2 & MT 16 (south of US 2) – the southeast quadrant has obstructions including buildings, signs, gas pumps, and potential parked/turning vehicles.
- MT 16/Broadway Avenue & 4th Street – the northeast and southwest quadrants have obstructions including trees and buildings. Sight distance is also hindered due to the curve along MT 16/Broadway Ave.
- MT 16/Broadway Avenue & 1st Street – northeast and southeast quadrants have obstructions including parked/turning vehicles and buildings; southwest and northwest quadrants have building and parked vehicles obstructions.

3.6 Surface Width and Pavement Conditions

The 2011 *Montana Road Log*, prepared by MDT, contains the most current roadway surfacing characteristics including surface width, lane width, shoulder width, surfacing thickness, base thickness, and travel lanes. Tables 13, 14, and 15 show the existing roadway surfacing information for both US 2 and MT 16 within the Study area. Due to the presence of turning lanes and street parking within the Study area, which are not included in the Road Log, the total surface width may be greater than the sum of lane widths and shoulder widths. The route segment plan indicates a recommended surface width of 36 feet or greater for MT 16 and 40 feet or greater for US 2. However, the MDT Road Width Committee would determine the appropriate width during future project development. Due to the increase in traffic volumes, deterioration of the roadway surface may come at a higher rate. The reduction in roadway service life results in an area of concern.

Table 13. Existing Roadway Surface Width for US 2

Location Reference Post (RP)	Width (feet)			Thickness (inches)		Travel Lanes
	Surface	Lane	Shoulder	Surface	Base	
642.8 – 644.251 <i>Enter West Culbertson City Limits @ 644.251</i>	28	12	2	6.0	14.0	2
644.251 – 644.556	32	12	4	3.0	14.0	2
644.556 – 644.624 <i>Junction N-62 (MT 16) @ 644.556; Junction N-22 (MT 16) @ 644.624</i>	32	12	4	3.0	14.0	2
644.624 – 645.498 <i>Leave East Culbertson City Limits @ 645.498</i>	32	12	4	3.0	14.0	2
645.498 – 646.8	32	12	4	3.0	14.0	2

Source: 2011 MDT Road Log, pg. 39

Table 14. Existing Roadway Surface Width for MT 16

Location Reference Post (RP)	Width (feet)			Thickness (inches)		Travel Lanes
	Surface	Lane	Shoulder	Surface	Base	
86.6 – 88.599 <i>Enter North Culbertson City Limits @ 88.599</i>	28	12	2	6.0	16.8	2
88.599 – 88.742 <i>Junction N-22 (MT 16) & N-1 (US 2) @ 88.742</i>	43	12	8	6.0	16.8	2

Source: 2011 MDT Road Log, pg. 69

Table 15. Existing Roadway Surface Width for MT 16

Location Reference Post (RP)	Width (feet)			Thickness (inches)		Travel Lanes
	Surface	Lane	Shoulder	Surface	Base	
0.000 – 0.326 <i>Junction N-62 (MT 16) & N-1 (US 2)</i>	44	12	8	3.0	15.0	2
0.326 – 1.200 <i>Junction MT 16 & 1st Street @ 0.326</i>	44	12	8	3.0	15.0	2
1.200 – 1.517 <i>Leave South Culbertson City Limits @ 1.517</i>	36	12	6	3.0	12.0	2

Location Reference Post (RP)	Width (feet)			Thickness (inches)		Travel Lanes
	Surface	Lane	Shoulder	Surface	Base	
1.517 – 2.074	36	12	6	3.0	12.0	2
2.074 – 3.00	40	12	8	3.0	8.0	2

Source: 2011 MDT Road Log, pg. 89

3.7 *Geotechnical*

A detailed geotechnical investigation report will not be developed for this corridor Study. The Big Muddy Creek – East project covers US 2 from RP 646.26 beyond the western edge of the Study area. The Big Muddy Creek – East Geotechnical report noted weak foundation soils in the area, which required a special provision to replace the traditional embankment construction with geotextile, geogrid and special borrow. At RP 87 on MT 16, a small shallow slope failure occurred due to heavy rainfall in the spring of 2011 and is being repaired.

3.8 *Drainage*

As stated in the Environmental Scan submitted for this Corridor Planning Study, the corridor Study area is located within the Lower Missouri River Basin, Charlie-Little Muddy Creek Sub-basin. The drainage has several unnamed streams and Clover and Diamond creeks that run through the Study area. A majority of local streets have curb and gutter which allows gravity flow to drain water away from the city limits. As a primarily agricultural corridor, there are several irrigation systems within the corridor, and consideration will be given to drainage as improvement options develop.

3.9 *Hydraulic Structures*

Table 16 shows the hydraulic structures located along US 2 and MT 16 within the corridor. A hydraulic analysis would be recommended if an improvement option is implemented as there have been historical flooding occurrences within the Study area.

Table 16. Hydraulic Structures

Approximate Location Reference Post (RP)	Size	Length	Remarks
US 2 - RP 642.8 to RP 646.8			
As-Built Project: FAP #F-84(20), West of Wolf Point-North Dakota Line			
642.82	24"	58'	DRAIN
643.05*	84"	200'	DRAIN
643.33*	24"	130'	DRAIN
643.66	18"	36'	RD APP RT
643.71	24"	128'	DRAIN SKEW
643.82	24"	118'	DRAIN
643.84	4'x6'	70'	U-PASS
643.94	24"	74'	DRAIN
644.02	24"	60'	DRAIN
644.26*	72"	148'	DRAIN SKEW COVER 21' (Diamond Creek)
644.37	18"	80'	STREET APP LT & RT
644.40	18"	22'	ALLEY APP RT
644.43	18"	40'	STREET APP RT
644.50	18"	60'	DRAIN
644.50	18"	40'	STREET APP RT
644.55	18"	67'	DRAIN
644.62	18"	120'	DRAIN DBL
644.69	18"	60'	DRAIN
644.69	18"	60'	DRAIN
644.76	18"	60'	DRAIN
644.82	18"	132'	STREET APP LT & RT
644.90	18"	60'	DRAIN
644.96	18"	51'	RD APP LT
645.42	24"	86'	DRAIN
645.66	18"	72'	RD APP LT & RT
645.77	18"	72'	FLD ENT LT & RT
646.02	24"	74'	DRAIN
646.41	30"	74'	DRAIN
646.50	24"	88'	DRAIN
646.59	24"	36'	RD APP LT
MT 16 (N-22) North of US 2 from RP 86.6 to RP 88.6			
As-Built Project: FAP #F-193(9), Culbertson-Plentywood			
88.60	29"S x 18"R	62'	DRAIN – INSTALLED & MOVED TO
88.49	29"S x 18"R	62'	DRAIN

Table 16. Hydraulic Structures (cont.)

JUNE 15, 2012

Approximate Location Reference Post (RP)	Size	Length	Remarks
88.40*	43"S x 27"R	54'	DRAIN
88.05*	12'6"S x 7'11"R	124'	DRAIN – COVER 13'
87.83	24"	76'	DRAIN
87.67	15"	40'	APP 31' RT
87.56	24"	66'	DRAIN
87.42	5'10"S x 7'7"R	80'	STOCKPASS
87.36	24"	174'	DRAIN
87.32	15"	60'	APP 47' RT
87.12	5'10"S x 7'7"R	92'	STOCKPASS
87.08	24"	176'	DRAIN
86.83*	24"	136'	DRAIN
86.71	24"	128'	DRAIN
MT 16 (N-62) South of US 2 from RP 0 to RP 3**			
As-Built Projects: FAP #F-273(10) Sidney-Culbertson & FAP #273-A Culbertson-Sidney Hwy.			
0.06	18"S x 11"R	68'	DRAIN
0.14	18"S x 11"R	126'	DRAIN – SKEW
0.19	18"S x 11"R	152'	DRAIN
0.25	18"S x 11"R	86'	DRAIN
0.34	15"	24'	PRIV ENT LT
0.35	15"	48'	ALLEY ENT LT & RT
0.36	15"	20'	PRIVATE ENT LT
0.38	15"	40'	PRIVATE ENT LT & RT
0.39	15"	76'	ST APP LT & RT
0.41	15"	20'	PRIVATE ENT LT
0.42	15"	48'	ALLEY ENT LT & RT
0.47	29"S x 18"R	40'	STREET APP – 93' RT
0.53	30" 30" DBL	46' 42'	NEW CMP DBL DR USE IN PLACE, LENG 26' LT & 20' RT
0.65	24"	58'	DRAIN
0.77	18"	54'	DRAIN
0.82	15"	36'	FARM ENT RT
0.94	18"	84'	FARM ENT LT & RT
0.99	18"	144'	RD APP LT & RT
1.03	18"	68'	FARM ENT LT & RT
1.22	18"	120'	DRAIN
1.30	24"	44'	DRAIN
1.65	18"	52'	DRAIN
1.71	7' x 6'	38'	DRAIN & STOCKPASS
1.79	30"	44'	DRAIN

Table 16. Hydraulic Structures (cont.)

Approximate Location Reference Post (RP)	Size	Length	Remarks
1.89	18"	32'	FARM ENT LT
1.90	18"	56'	RD APP RT
2.20	24"	58'	DRAIN
2.25	18"	42'	DRAIN
2.37*	24"	58'	DRAIN – SKEW
2.42	7' x 6'	76'	DRAIN & STOCKPASS – SKEW 35°
2.47	15"	28'	FARM ENT LT
2.59	24"	54'	DRAIN
2.65	18"	60'	DRAIN
2.68	15"	60'	FARM ENT LT & RT
2.83	24"	110'	DRAIN - SKEW
2.90	24"	100'	DRAIN
3.01	24"	190'	DRAIN – SKEW

*denotes blue line stream crossing on USGS Quad Map. Indicating the waterways may be potentially jurisdictional by U.S. Army Corps of Engineers.

**The culvert locations for the portion of MT 16 south of US 2 are represented as actual mile locations rather than reference post locations.

3.10 *Bridge Crossings*

Two bridge crossings are located within the corridor. They include the Clover Creek Bridge and the Clover Creek/BNSF Railway Bridge. The Clover Creek Bridge was last inspected in December 2010, and the Clover Creek/BNSF Railway Bridge was last inspected in May 2011. The assessments determined the Sufficiency Rating (SR) for each structure.

The Sufficiency Rating formula is a method of evaluating highway bridge data to obtain a numeric value indicating the sufficiency of the bridge to remain in service. The result of this method is the percentage in which 100 is an entirely sufficient bridge and 0 is an entirely deficient bridge. In order to receive funding through the Highway Bridge Replacement and Rehabilitation Program (HBRRP), structures must be *Structurally Deficient* or *Functionally Obsolete* and have an SR of 80% or below. Structures with an SR of 0 to 49.9% are eligible for replacement, and structures 50 to 80 are eligible for rehabilitation unless otherwise approved by the FHWA. The following criteria determine whether or not a structure is structurally deficient or functionally obsolete:

1. Structurally Deficient. A condition of **4 or less** for any of the following:

Deck Rating

Superstructure Rating

Substructure Rating

Or, an appraisal of 2 or less for the following:

Structure Rating

Waterway Adequacy

2. Functionally Obsolete. An appraisal of **3 or less** for the following:

Deck Geometry

Under Clearance

Approach Roadway Alignment

- Or, an appraisal of 3 for the following:

Structure Rating

Waterway Adequacy

Table 17 shows the sufficiency ratings of the two bridge crossings.

Table 17. Bridge Sufficiency Rating (SR)

Structurally Deficiency SR Criteria		Clover Creek	Clover Creek/BNSF
Deck Rating	≤4	7	6
Superstructure Rating	≤4	5	5
Substructure Rating	≤4	5	7
Structure Rating	≤2	5	5
Waterway Adequacy	≤2	3	8
Functionally Obsolete SR Criteria			
Structure Rating	≠3	5	5
Deck Geometry	≤3	5	5
Under Clearance	≤3	-	3
Waterway Adequacy	≠3	3	8
Approach Roadway Alignment	≤3	8	6
Design Loading		3 MS 13.5 (HS 15)	5 MS 18 (HS 20)
Sufficiency Rating		47.7	58.5
Structure Status		Not Deficient	Functionally Obsolete – Eligible for Rehabilitation

3.10.1 Clover Creek Bridge

The Clover Creek Bridge is a two-lane structure located at RP 645.62 on US 2 approximately one mile east of Culbertson. Constructed in 1955, the bridge is 58 feet long and 30 feet wide with a bituminous surface on a timber stringer/girder three-span structure.

According to the MDT bridge inspection report; even though the sufficiency rating is 47.7, the Clover Creek Bridge has been categorized as ***not structurally deficient*** and ***not functionally obsolete***.

3.10.2 Clover Creek/BNSF Railway Bridge

The Clover Creek/BNSF Railway Bridge is located south of Culbertson along MT 16 at RP 1.57. Constructed in 1957, the four-span concrete cast-in-place bridge deck measures 268 feet long and 32 feet wide, spanning both Clover Creek and BNSF tracks. The structure is currently programmed for work to be completed in the Culbertson-South (CN 6972000) project. The proposed work includes removing asphalt from the deck, miscellaneous bridge deck repair, and resealing existing joints.

Based on the above ratings, the Clover Creek/BNSF Railway Bridge is categorized as ***functionally obsolete*** and ***eligible for rehabilitation***.

3.11 Crash Analysis

Safety issues are a concern along US 2 and MT 16 through the Study area. In 2011, the MDT Traffic and Safety Bureau conducted a crash analysis along MT 16 from RP 0 to 5 and from RP 86 to 88.7 and along US 2 from RP 642 to 647. This analysis was based on the most currently available ten-years of crash data from January 1, 2001 to December 31, 2010. Because the process of collecting and processing crash data takes time, the 2011 crash data has not been included in this analysis. The ten-year analysis compared the Study area with the statewide average crash rates on Non-Interstate National Highway System (NINHS) rural routes. Crash rates are defined as the number of crashes per million vehicle miles. Severity index is defined as the ratio of the sum of the level of crash degree to the total number of crashes. Severity rate is defined as the crash rate multiplied by the severity index. Table 18 describes the crash rate, severity index, and severity rate for each roadway as compared to the most recently available statewide averages for NINHS routes. The Study area crash data is based on the most recent 10-year crash data.

Table 18. Crash Statistics

	US 2 RP 642.0 to RP 647.0	MT 16 RP 86.0 to RP 88.74	MT 16 RP 0.0 to RP 5.0 ¹	Statewide Average for NINHS Rural Routes ²
All Vehicles Crash Rate	1.53	1.94	1.81	1.07
All Vehicles Severity Index	1.84	1.76	2.26	2.14
All Vehicles Severity Rate	2.82	3.41	4.09	2.29
All Vehicles Crashes	37	17	31	

Denotes above Statewide Average

1. Source: MDT Traffic and Data Collection Analysis (Includes crash statistics outside the Study area boundary)
2. NINHS Route 5-year averages from 2005 through 2009 for the State of Montana

The crash rate within the Study area is higher than the 2005 through 2009 average comparable rural routes throughout the state of Montana. Table 19 shows the total number of crashes for every quarter mile through the existing corridor Study area boundary over a ten-year period. It should be noted that green shading in Table 19 indicates those sections either partially or fully within the Culbertson city limits.

Table 19. Crashes by Location

Reference Post Location	Number of Crashes
US 2	
642.8 – 643.04	3
643.05 – 643.29	2
643.3 – 643.54	1
643.55 – 643.79	0
643.8 – 644.04	3
644.05 – 644.29	0
644.3 – 644.54	2
644.55 – 644.79	7
644.8 – 645.04	2
645.05 – 645.29	0
645.3 – 645.54	2
645.55 – 645.79	3
645.8 – 646.04	3
646.05 – 646.29	0
646.3 – 646.54	4
646.55 – 646.8	1
MT 16	
86.6 – 86.84	1
86.85 – 87.09	1
87.1 – 87.34	5
87.35 – 87.59	1
87.6 – 87.84	2
87.85 – 88.09	2
88.1 – 88.34	2
88.35 – 88.6	1
MT 16	
0.0 – 0.24	4

JUNE 15, 2012

Table 19. Crashes by Location (cont.)

Reference Post Location	Number of Crashes
0.25 – 0.49	2
0.5 – 0.74	2
0.75 – 0.99	0
1.0 – 1.24	0
1.25 – 1.49	0
1.5 – 1.74	1
1.75 – 1.99	1
2.0 – 2.24	2
2.25 – 2.49	2
2.5 – 2.74	2
2.75 – 3.0	0
Total Crashes	64

The largest crash cluster is on US 2 between MP 644.55 and 644.79 with seven crashes over the ten-year period. Although seven crashes in a quarter mile over a ten-year period is not considered high, in relation to the other locations in the Study area it has the highest occurrence of crashes. This quarter mile section contains both intersections of US 2 with MT 16.

In addition to the sheer number of crashes throughout the Study area, the crash data was studied for any additional trends. Over two-thirds of the crashes in the Study area occurred during clear weather conditions and/or on dry road conditions. 17 crashes were either in the intersection or intersection related while the remaining 47 crashes were non junction related. Table 20 describes the crash breakdown for each roadway in terms of junction relation, weather conditions, and crash severity.

Table 20. Crashes by Roadway Segment

	Total Crashes	Junction Relation		Weather Conditions			Crash Severity			
		intersection related	Non junction	Clear	Cloudy	Rain, Snow, Other	Property Damage Only	Possible/Non-Incapacitating Injury	Incapacitating Injury	Fatalities
US 2 RP 642.8 to RP 646.8	33	10	23	24	4	5	26	4	2	1
MT 16 RP 86.6 to RP 88.6	15	0	15	7	5	3	11	3	1	0
MT 16 RP 0.0 to RP 3.0	16	7	9	14	2	0	10	5	1	0

The two most prevalent crash types in the Study area are those with wild animals or fixed objects. It should be noted that all wild animal crashes occurred outside the Culbertson city limits. Figure 24 shows a breakdown of the crashes by collision code.

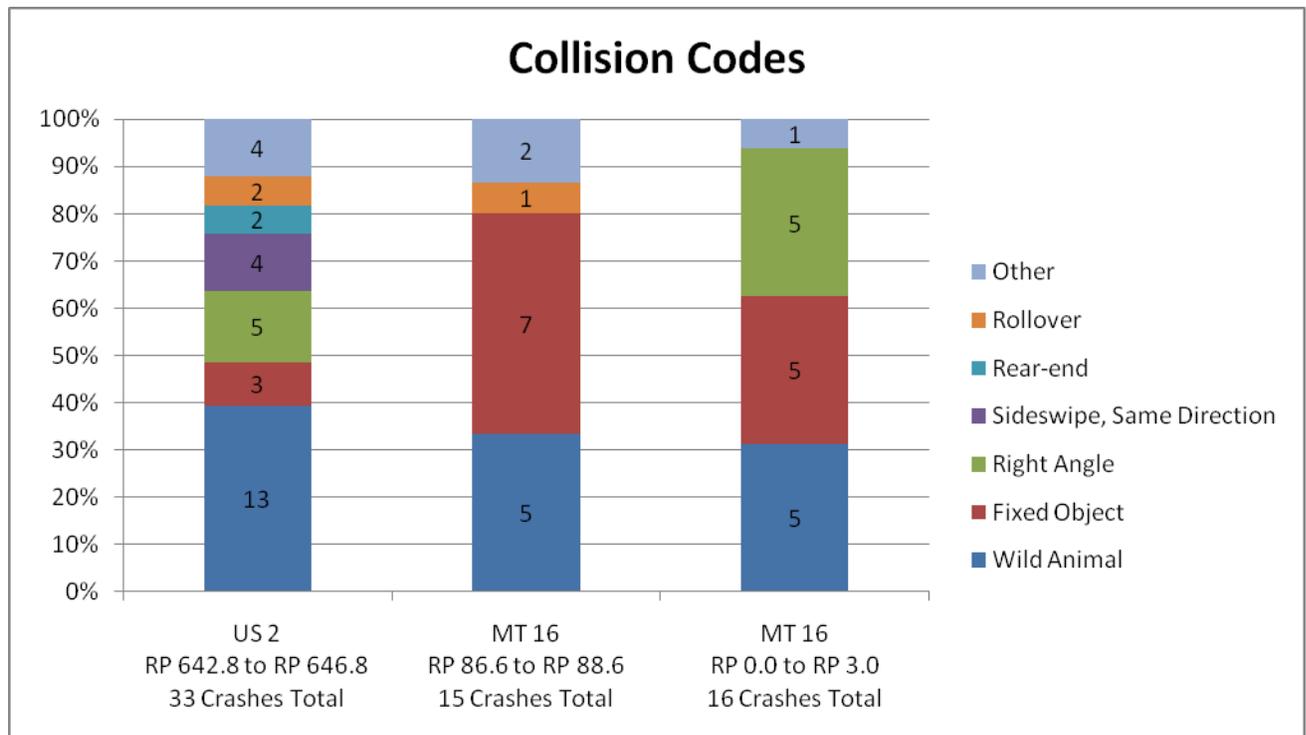


Figure 24. Crash by Collision Code

On US 2, over the ten year crash analysis period, there were five wild animal crashes west of Culbertson while the remaining eight occurred east of Culbertson. On MT 16, there were five wild animal crashes north of the Culbertson city limits and five wild animal crashes south of the Culbertson city limits. There are no clusters of wild animal/vehicle crash locations. It should be noted that wild animal crash data is developed per Montana Highway Patrol crash reports. The occurrences of wild animal crashes have the potential to be higher because not all wild animal crashes are reported. Of the 15 fixed object crashes in the Study area, the only commonality is that nine of the 12 crashes on MT 16 occurred during non-daylight hours. All three fixed object crashes on US 2 occurred during daylight hours.

3.12 *Railroad*

BNSF Railway, which runs through the middle of the corridor Study area, is a consideration in developing improvement options. The freight and passenger train speeds for the corridor are both 70 mph outside of the city limits and within the town, the speed is 60 mph for both freight and passenger trains. The system average train length is one mile. Guidelines have been established defining construction requirements and development standards near railroad facilities. As improvement options develop, consideration will be made to comply with specified railroad requirements.

3.13 *Non-Motorized Infrastructure*

Bicyclists and pedestrians, including school-aged children, walk to and from schools, parks, downtown businesses, and other community services. Current pedestrian infrastructure is inconsistent throughout the corridor as sidewalks are only adjacent to some roadways. According to the 2011 Town of Culbertson Growth Policy Update, there is limited pedestrian travel interconnectivity throughout the Town and surrounding areas. This limited interconnectivity discourages pedestrian travel or requires pedestrian use of the roadway in several portions of the Study area.

There are currently two signed and striped crosswalks located within the Study area. One crosswalk is located on US 2 between the Culbertson Public Schools and the adjacent convenient store, currently called Val-Am Stop & Go. This crosswalk is located mid-block and is primarily used by school-aged children to access the convenient store and also to access the Culbertson Schools Recreation Complex. The other crosswalk is located on Broadway parallel to 5th Street. There is currently no signed or striped crosswalk to allow children or other pedestrians within the northeast quadrant of Culbertson, located north of US 2 and east of MT 16 north, to access the school, parks, or other community services. With the percentage of trucks traversing the corridor, this has the potential to be a safety concern. As improvement options are developed, consideration shall be given to non-motorized facilities within the Culbertson community.

3.14 *Airport*

The Big Sky Field is a public general aviation airport owned jointly by Roosevelt County and the Town of Culbertson. There are seven hangers of differing sizes and one lighted runway that is 3,800 feet long and 60 feet wide. The runway has a 12,500 pounds single-wheel load capacity. The primary aircraft that use the Big Sky Field are single engine, general aviation aircraft with the exception of the air ambulance

service, which uses a twin engine turbo-prop aircraft. In 2007 there were 100 air taxi operations, 700 itinerant operations, 100 Military operations, and 3,750 local operations. (WWC Engineering 2011)

3.15 *Utilities*

Several utilities exist throughout the Study area, primarily along US 2 and MT 16. Utilities include power, telephone, water, sewer, gas, and fiber optics. Culbertson's water treatment plant draws water from the Missouri River and is situated near the southeast quadrant of the Study area. Water lines run north from the water treatment plant and service not only commercial and residential properties within the City limits, but also major commercial properties outside the City limits. Water supply lines within the transportation grid are buried under the paved roadways while sewer lines run underneath alleyways. Fiber optic lines enter the Study area from the north, near MT 16. Overhead power lines service major commercial properties both within and outside the City limits.

In addition to the utilities that service the Town of Culbertson, there is also a Dry Prairie Rural Water pipeline that services northeastern Montana. This pipeline has two branches within the Study area. The Culbertson to Medicine Lake Mainline starts at the Culbertson water treatment plant then heads west where it skirts the western edge of Culbertson, crosses US 2, and then heads north. The "A" Branchline connects to the mainline north of Culbertson and then heads east. As improvement options develop, it will be important to recognize the impact options may or may not have on the utilities within the corridor. Utility adjustments and/or relocations may delay projects if they are not identified in the project development process. Consideration will be given to utilities as improvement options develop.

3.16 *Access Points*

Access points were counted using 2012 Google Earth mapping and were field verified in March 2012. Access points include driveways, alleyways, local street intersections, and any other defined entrance/exit locations. When parallel parking options exist along US 2 or MT 16, only street intersections and defined entrances/exits were counted. It should be noted that there are multiple commercial entrances throughout the Study area where there is no defined curb and gutter. Although there is no defined entrance/exit to these commercial businesses, each continuous pavement stretch was counted as a single access point.

There are currently 65 access points along US 2 (30 north and 35 south) from RP 642.8 to RP 646.8, 32 access points along MT 16 (16 west and 16 east) from RP 86.6 to RP 88.6 and 42 access points along MT 16 (22 south/west and 20 north/east) from RP 0.0 to RP 3.0. There is currently no access control implemented along either US 2 or MT 16 within the Study area. Access control is anticipated to be developed with the Culbertson to North Dakota line project. Tables 21 and 22 contain a listing of approaches by approximate half-mile increments.

Table 21. Access Points along US 2

Reference Post (RP)	North of US 2		South of US 2		Total	
	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)
642.8 to 643.3	2	4	1	2	3	6
643.3 to 643.8	0	0	1	2	1	2
643.8 to 644.3	3	6	2	4	5	10
644.3 to 644.8	14	28	20	40	34	68
644.8 to 645.3	5	10	6	12	11	22
645.3 to 645.8	1	2	2	4	3	6
645.8 to 646.3	2	4	3	6	5	10
646.3 to 646.8	3	6	0	0	3	6

Table 22. Access Points along MT 16

Reference Post (RP)	West of MT 16		East of MT 16		Total	
	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)
86.6 to 87.1	1	2	1	2	2	4
87.1 to 87.6	0	0	2	4	2	4
87.6 to 88.1	5	10	4	8	9	18
88.1 to 88.6	7	14	9	18	16	32
Reference Post (RP)	South/West of MT 16		North/East of MT 16		Total	
	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)	No. Accesses	Density (access/mi)
0.0 to 0.5	5	10	5	10	10	20
0.5 to 1.0	5	10	4	8	9	18
1.0 to 1.5	6	12	7	14	13	26
1.5 to 2.0	2	4	1	2	3	6
2.0 to 2.5	1	2	1	2	2	4
2.5 to 3.0	3	6	2	4	5	10

In addition to the access points listed in the tables above, as of January 2012, MDT has two additional access point requests. If permitted, two additional access points would be added between RP 644.8 and 645.3.

Access control could be an area of concern when roadway widths are limited and when there is no widened area, such as a shoulder, for vehicles to exit the traffic stream. Access control could also be an area of concern in this corridor due to the high concentration of access points within the city limits. High concentrations of access points have the potential to increase the risk of crashes due to the proximity of vehicles concurrently entering/exiting the roadway. Although there are currently no crash trends, a lack of access control implementation coupled with the projected increase in AADT could increase the number of crashes. Access control will be considered as improvement options are developed.

3.17 *Other Planning Documents*

Other local documents are important to consider when evaluating existing and projected conditions as these local documents speak to what is planned for the area. It is also important to review these documents in order to ensure consistency with any improvement options that are developed through the corridor planning study process. Four local planning documents were consulted and are summarized in this section.

3.17.1 Growth Policy

As stated in the Town of Culbertson's 2011 Growth Policy Update, the 2011 Policy is intended to:

1. Update the Town's 2010 Growth Policy to be more specific to the Town's plan for growth and to ensure compliance with the Growth Policy Statute, as outlined in 76-1-601, MCA;
2. Provide effective guidance on local decisions on growth, development, and conservation over the next five to ten years;
3. Identify the tools that are needed to achieve the Towns goals;
4. Ensure that growth occurs in a manner which supports as many goals and policies as possible;
5. Provide a framework for reviewing and updating the Town's Subdivision Regulations.

There are several goals specific to transportation within the 2011 Growth Policy Update. These goals include attracting air traffic to the Big Sky Field, providing areas for pedestrians to travel that promote health and safety, and alerting motorists of the school and minimize the potential for vehicle/pedestrian accidents.

3.17.2 Capital Improvements Plan

The Town of Culbertson Capital Improvements Plan (CIP), adopted on December 5, 2011, contains detailed strategies for funding priority infrastructure projects for a total of \$1,727,300. In addition to roadway improvements, the CIP addresses improvements to the Big Sky Field for a total of \$1,202,300.

3.17.3 Transportation Regional Economic Development Study

Although the US 2/MT 16 Transportation Regional Economic Development (TRED) Study is not specific to the community of Culbertson, it does discuss regional economic issues directly related to two main arterials entering/exiting the town of Culbertson. The purpose of the TRED Study was to identify economic, regulatory, or operational changes that would result in traffic and safety conditions which in its turn would warrant building a four-lane highway on the Montana portion of the Theodore Roosevelt Expressway.

3.17.4 Culbertson – East to North Dakota Environmental Assessment

The Culbertson – East to North Dakota Environmental Assessment (EA) was consulted as part of this project due to its proposed reconfiguration of US 2 within the Study area. Future improvement options would need to consider the possibility of implementation of this proposed project.

US 2 from the North Dakota State Line to the intersection of MT 16 north is part of the Theodore Roosevelt Expressway. As stated in the February 2008 Culbertson – East to North Dakota EA the primary purpose of this project was to ensure system continuity and roadway configuration consistency with existing segments of the Theodore Roosevelt Expressway and north/south connecting corridors. The FONSI was signed August 2008. The Proposed Action identified through this EA process was a four-lane highway from the North Dakota State line to the intersection of US 2 and MT 16, which is located in the Study area. The portions of this roadway within the Culbertson City limits would consist of 5-foot sidewalks with curb and gutter, 5-foot shoulders, two 12-foot outside travel lanes, and two 11-foot inside travel lanes. As US 2 leaves the city limits the curb and gutter and sidewalks would be terminated but the roadway would remain in a four-lane undivided configuration with four 12-foot travel lanes and 8-foot shoulders. Just west of Clover Creek the roadway would transition to a divided roadway.

Chapter 4 Existing Environmental

This chapter includes a brief summary of the environmental elements within the Culbertson Corridor Planning Study area. More detailed information regarding each environmental area can be found in the full *Environmental Scan* report.

4.1 *Physical Environment*

The Study area is centered around the Town of Culbertson, located in Roosevelt County in northeastern Montana. The Missouri River is located approximately 1.5 miles south of the Town of Culbertson and outside the Study area boundary. Rolling hills parallel the river and form a break between the valley bottom and the upper glaciated plains. The general topography north of Culbertson consists of rough ridges and steep drainage ways.

4.1.1 Air Quality

The Clean Air Act of 1970, as amended in 1990, is a federal law requiring the U.S. Environmental Protection Agency (EPA) to develop and enforce regulations in order to reduce air pollution and protect air quality. The EPA has established attainment and non-attainment zones throughout the state. The state must establish a State Implementation Plan, outlining the control of air pollution, for any zones designated as non-attainment areas. The Study area is outside any non-attainment air quality zones.

4.1.2 Soil Resources and Prime Farmland

The Farmland Protection Policy Act of 1981 (Title 7 United States Code, Chapter 73) has as its purpose “to minimize the extent to which federal programs contribute to the unnecessary and irreversible conversion of farmland to nonagricultural uses, and to assure that federal programs are administered in a manner that, to the extent practicable, will be compatible with State, unit of local government, and private programs and policies to protect farmland.”

Information on soils from the US Department of Agriculture, Natural Resource Conservation Service (NRCS) was obtained to determine the presence of prime and unique farmland in the Study area. The Roosevelt County soil surveys indicate that the predominant soil types within the Study area include loam, silty loams, and silty clay. Prime farmland, as well as farmland of statewide importance, exists within the Study area.

The Form NRCS-CPA-106: Farmland Conversion Impact Rating for Corridor Type Projects is a way for the NRCS to keep inventory of the Prime and Important farmlands within the state. Project activities associated with the construction of a alternative route in the Study area will likely create impacts to the soil map units with prime and important farmland status; thus it is likely required that a NRCS-CPA-106 Form be completed.

4.1.3 Land Use

According to the National Resource Information System (NRIS), the corridor Study area has been classified into 10 different categories of land use. The categories include: exempt property, agricultural

rural, commercial rural, commercial urban, farmstead rural, industrial rural, residential rural, residential urban, vacant land rural, vacant land urban. The predominant corridor land use is agricultural rural.

4.1.4 Geologic Resources

The Montana Bureau of Mines and Geology has provided geological information for the Study area. According to U.S. Geological Survey (USGS), shale is the primary rock type of the Fort Union Formation, of which the Tongue River Member is part. The secondary rock type is siltstone and other rock types associated with this formation are sandstone, coal, and limestone.

The Town of Culbertson lies within the Bakken-Lodgepole Total Petroleum System within the Williston Basin Province. Due to the considerable exploration of oil and gas surrounding the Study area, oil and gas are prime economic contributors to the area.

Seismic information was reviewed for fault lines and seismic hazard areas. This geologic information can help determine any potential design and construction issues related to embankments and road design. A fault zone known as the Weldon-Brockton-Froid Fault Zone is approximately 8 miles outside the Study area, but is the closest fault zone to the Study area.

4.1.5 Water Resources

4.1.5.1. Surface Water

The study area lies within the Lower Missouri River Basin, Charlie-Little Muddy Creek Sub-basin Hydrologic Unit Code (HUC) 10060005, and Clover Creek Watershed (HUC: 1006000505). According to available geographic information system (GIS) data and a review of USGS Culbertson and McCabe West quad maps, several surface waters have been identified within the Study area.

The Lower Missouri Basin and Charlie-Little Muddy Creek Sub-basin are listed in the 2010 Integrated 303(d)/305(d) Water Quality Report for Montana by DEQ. The Charlie-Little Muddy Creek Sub-basin is listed as a Category 5 water quality, meaning that one or more applicable beneficial uses have been assessed as being impaired or threatened, and a TMDL is required to address the factors causing the impairment or threat. Beneficial uses that apply to this area include agricultural, aquatic life, warm water fisheries, drinking water sources, and industry. Probable causes of impairment include flow alteration and temperature modification by dam or impoundment impacts from hydrostructure flow regulation/modification. According to DEQ, Clover Creek and Diamond Creek are not identified as impaired water bodies on the TMDL list. If a project is forwarded from this study, potential impacts to all surface waters will need to be examined to determine if the waterways are considered waters of the U.S. and subject to jurisdiction by the U.S. Army Corps of Engineers (USACE).

4.1.5.2. Public Water Supply

According to NRIS and DEQ, three public water supplies exist within the Study area boundary. The public water supplies are summarized in Table 23.

Table 23. Public Water Supply

PWSID	Primary Name	City	Population Served (resident/non- resident)	Source Name	Source Type
MT0000192	Town of Culbertson	Culbertson	796/0	Missouri River	Surface Water
IN004	Plant Reservoir	Surface Water	-	-	-
MT0004348	Dry Prairie Rural Water Authority	Culbertson	1147/0	Consecutive Connection from 00192	Surface Water

4.1.5.1. Irrigation

Land within the southern portion of the Study area boundary is irrigated by various types of irrigation systems. The different methods include sprinkler, flood or “gravity flow”, and water spreading. According to the U.S. Department of Agriculture (USDA), the predominant irrigation methods in Montana are flood and sprinkler systems. Potential impacts to the irrigation facilities should be minimized to the greatest extent practicable.

4.1.5.1. Wetlands

National Wetland Inventory (NWI) Mapping is available for the Study area. The majority of the wetlands are located near the southern portion of the study area boundary and along segments of Clover Creek. It is important to note that the NWI maps are not accurate or detailed enough for project level wetland identification and delineation. The NWI map is not intended to be a complete identification and/or delineation of wetlands present in the Study area. NWI maps are typically generated based on aerial and satellite imagery. They are generated by the U.S. Fish and Wildlife Service (USFWS), and are based on the USFWS definition of wetlands, which differs from the USACE definition of wetlands that MDT is required to use in wetland identification and delineation.

Formal wetland delineations will need to be conducted during the project development process, according to standard USACE defined procedures, if an improvement option(s) is forwarded. Jurisdictional determinations of wetlands will also be conducted during the project development process. Wetland impacts should be avoided to the greatest extent practicable. All unavoidable wetland impacts will need to be mitigated as required by the USACE. Potential mitigation sites should be investigated and constructed prior to project impacts. The USACE generally requires that compensatory mitigation occur in the same watershed as the impacts. Coordination with the USACE will be necessary to determine the appropriate location of any mitigation site.

4.1.6 **Floodplains and Floodways**

The Federal Emergency Management Agency (FEMA) issued flood maps have indicated Flood Zones A and AE are present within the Study area. Executive Order (EO) 11988, Floodplain Management, requires federal agencies to avoid direct or indirect support of floodplain development whenever a practicable alternative exists. EO 11988 and 23 CFR 650 Part A requires an evaluation of project alternatives to determine the extent of any encroachment into the base floodplain. Coordination with Roosevelt County should be conducted during the project development process to determine if floodplain permits are required. As improvement options are developed, consideration will be given to reduce the impact within the floodplain to the extent practicable.

4.1.7 **Hazardous Substances**

The NRIS database identified 13 leak sites within the Study area, and it should be noted all but 3 sites have been resolved. Two mine sites were also identified in the Study area. Additional unknown contaminated sites may be identified during the project development process and/or during construction.

If an improvement option is forwarded into project development, further evaluation may be needed at specific sites to determine if contamination will be encountered during construction. This may include reviewing DEQ files and conducting subsurface investigation activities to determine the extent of soil and groundwater contamination. If it appears that contaminated soils or groundwater could be encountered during construction, handling/disposing of the contaminated material will need to be conducted in accordance with State, Federal, Tribal, and local laws and rules.

4.2 ***Biological Resources***

4.2.1 **Fish and Wildlife**

The Montana Fish, Wildlife & Parks owns the Culbertson Bridge Fishing Access Site; a 12.6 acre fishing access site, located south of the Study area. The closest National Wildlife Refuge is located approximately 20 miles north of the Study area at the Medicine Lake National Wildlife Refuge.

Riparian and river, stream or creek habitats should be avoided to the greatest extent practicable, including but not limited to Clover Creek and Diamond Creek. Montana Fish, Wildlife & Parks keeps a database of information on fish distribution known as the Montana Fisheries Information System (MFISH). The MFISH database notes that Clover Creek is the only waterbody in the Study area that has sufficient year-round flow to house fish. Brook Stickleback was the only species noted in Clover Creek. Encroachment into the wetted width of any waterway and the associated riparian habitat should be limited to the absolute minimum necessary for the construction of the proposed project. Soils, vegetation, and flooding data can be utilized in determining the extent of riparian habitat.

4.2.2 **Threatened and Endangered Animal Species**

The federal list of threatened and endangered species is maintained by the USFWS. Species on this list receive special protections under the Endangered Species Act (Title 16 United States Code, Chapter 35).

An 'endangered' species is one that is in danger of extinction throughout all or a significant portion of its range. A 'threatened' species is one that is likely to become endangered in the foreseeable future. The USFWS also maintains a list of species that are candidates or proposed for possible addition to the federal list.

In May 2011, the USFWS published a list of endangered, threatened, proposed and candidate species for each county within Montana. This list identifies the counties where one would reasonably expect the species to occur. Roosevelt County listed the endangered Pallid Sturgeon, threatened and designated critical habitat for the Piping Plover, endangered Interior Least Tern, endangered Whooping Crane, and the candidate Sprague's Pipit. Further evaluation of potential impacts to all threatened, endangered, proposed, or candidate species will need to be conducted during the project development process if an improvement option is forwarded. Updated critical habitat maps should be consulted during the project development process.

4.2.3 Animal Species of Concern

Table 24 lists the 15 animal species of concern that the Montana Natural Heritage Program (MNHP) has records of in Township 58, Sections 55 and 56. The results of a data search by the MNHP reflect the current status of their data collection efforts. These results are not intended as a final statement on sensitive species within a given area, or as a substitute for on-site surveys. On-site surveys would need to be completed during the project development process.

Table 24. Montana Animal Species of Concern

	Common Name
Mammals	Townsend's Big Eared Bat*
	Eastern Red Bat
Birds	Great Blue Heron
	Piping Plover*
	Whooping Crane
Fish**	Blue Sucker
	Iowa Darter
	Shortnose Gar
	Sturgeon Chub
	Sicklefin Chub
	Northern Redbelly Dace
	Sauger
	Pallid Sturgeon
Pearl Dace	
Reptiles	Western Hog-nosed Snake

** Note: Although MNHP has documentation of the Townsend's Big-eared Bat and Piping Plover existing in T28N R55 and 56E, specific mapped locations of these species shows they are outside, but adjacent to the Study area.*

***Note: Although MNHP has documentation of these fish existing in T28N R56E, Clover Creek is the only stream located within the Study area and, therefore, the stream is presumed to not have the flow necessary to sustain these fish populations.*

4.2.4 **Vegetation**

The Montana Natural Heritage land cover database shows that the Study area is largely comprised of lowland/prairie grassland and agriculture. The grasslands support livestock grazing, and have been tilled for small grain and hay production. The agriculture land cover category is broken into cultivated crops and pasture/hay.

4.2.4.1. Threatened and Endangered Plant Species

According to the USFWS, there are not any plant species listed as threatened, endangered, proposed, or candidate species for Roosevelt County. An evaluation of potential for and impacts to all threatened, endangered, proposed, or candidate species would need to be conducted during the project development process.

4.2.4.2. Plant Species of Concern

The MNHP does not have record of any plant species of concern within the Study area. The results of a data search by the MNHP reflect the current status of their data collection efforts. These results are not intended as a final statement on sensitive species within a given area, or as a substitute for on-site surveys. On-site surveys would need to be completed during the project development process.

4.2.4.3. Noxious Weeds

The INVADERS Database System identified six (6) noxious weeds present in Roosevelt County, Montana: Canada Thistle, Dalmatian Toadflax, Field Bindweed, Leafy Spurge, Russian Knapweed, and Spotted Knapweed. However, four (4) noxious weeds are present in the Study area boundary: Leafy Spurge, Spotted Knapweed, Russian Knapweed, and Dalmatian Toadflax. The project area will need to be surveyed for noxious weeds during the project development process.

To reduce the spread and establishment of noxious weeds and to re-establish permanent vegetation, disturbed areas will need to be seeded with desirable plant species. County Weed Control Supervisors should be contacted prior to any construction activities regarding specific measures for weed control.

4.3 ***Cultural Resources***

4.3.1 **Archaeological Resources**

The Montana State Historic Preservation Office (SHPO) was contacted to determine the presence of any known cultural and/or historic sites within the Study area. The file search yielded one previously recorded archaeological resource site. This site is listed as a prehistoric lithic scatter. If an improvement option is forwarded into project development, on the ground fieldwork will be necessary to determine where additional cultural resources are located.

4.3.2 Historic Resources

A file search conducted by SHPO revealed four 4(f) resource sites within the Study area that are either on or eligible for inclusion in the National Register of Historic Places (NRHP) while there are 30 undetermined historic properties within the Study area.

If improvement options are forwarded from this Study and are federally-funded, a cultural resource survey of the Area of Potential Effect for this project as specified in Section 106 of the National Historic Preservation Act (Title 16 United States Code, Chapter 1; 36 CFR 800) will need to be completed. Section 106 requires Federal agencies to “take into account the effects of their undertakings on historic properties.” The purpose of the Section 106 process is to identify historic properties that could be affected by the undertaking, assess the effects of the project and investigate methods to avoid, minimize or mitigate any adverse effects on historic properties.

4.3.3 6 (f) Resources

Section 6(f) of the Land and Water Conservation Funds Act (Title 16 United States Code, Chapter 1) applies to all projects that impact public outdoor recreational lands purchased and/or improved with land and water conservation funds. The Secretary of the Interior must approve any conversion of property acquired or developed with assistance under this Act to other than public, outdoor recreation use. Several 6(f) properties have been identified within the Study area including the following:

- Culbertson Swimming Pool
- Culbertson Bicentennial Park
- Culbertson Schools Recreation Complex

4.3.4 4 (f) Resources

Section 4(f) refers to the original section within the Department of Transportation Act of 1966 (Title 49 United States Code, Chapter 3), which set the requirement for consideration of park and recreational lands, wildlife and waterfowl refuges, and historic sites in transportation project development. Prior to approving a project that “uses” a Section 4(f) resource, FHWA must find that there is no prudent or feasible alternative that completely avoids 4(f) resources. “Use” can occur when land is permanently incorporated into a transportation facility or when there is a temporary occupancy of the land that is adverse to a 4(f) resource. Constructive “use” can also occur when a project’s proximity impacts are so severe that the protected activities, features, or attributes that qualify a resource for protection under 4(f) are “substantially impacted”. 4(f) resources include any historic or archaeological sites on or eligible for inclusion in the National Register. Additionally, 4(f) resources include significant publicly-owned parks, recreational areas, and wildlife or waterfowl refuges. The following list includes potential 4(f) resources, including parks and recreational areas and sites eligible for listing on the National Register:

- Bicentennial Park
- Swimming Pool Park

- Culbertson Public Schools
- Culbertson Public School's Sports Complex
- BNSF Railway
- Charlie Jacobs House
- Oelkers Carter Service Center
- Petersen House

4.3.5 Noise

If an improvement option is forwarded into project development, a noise study would be required to determine where noise-sensitive land uses are located, what existing noise levels those areas are experiencing, and to estimate what future noise levels will be as a result of the project per MDT policy. Previous noise studies have been conducted along US 2 within the Study area for the *Culbertson East to North Dakota Environmental Assessment*. If the project is expected to change traffic volumes on other routes, then off-project routes should also be studied for noise impacts. In areas of residential development, noise impacts (existing or predicted) may need to be mitigated.

Chapter 5 Areas of Concern

This chapter includes a list of areas of concern on US 2 and MT 16 within the Culbertson Corridor Study area. These areas were determined through an analysis of as-built drawings and other available information. More detailed information regarding the areas of concern has been provided in the previous chapter and summarized in the following sections. The order in which the areas of concern are listed does not indicate one is more important nor has priority over another. All areas of concern will be considered as improvement options are developed for this Study.

5.1 Geometrics

Roadway geometric areas of concern include substandard horizontal and vertical curvature. The areas of concern along US 2 and MT 16 that do not meet current MDT standards are summarized in Table 25.

Table 25. Geometric Areas of Concern

Approximate Location (RP)	Design Element	Substandard Design Feature	Description
647.8 (US 2)	Horizontal	Length	Does not meet level terrain standards
0.13 (MT 16)	Horizontal	Radius & Length	Do not meet urban 40 mph standards
0.15 (MT 16)	Horizontal	Radius & Length	Do not meet urban 40 mph standards
0.96 (MT 16)	Horizontal	Radius	Does not meet level terrain standards
2.47 (MT 16)	Horizontal	Radius	Does not meet level terrain standards
2.77 (MT 16)	Horizontal	Radius & Length	Do not meet level terrain standards
2.97 (MT 16)	Horizontal	Radius & Length	Do not meet level terrain standards
642.63 – 643.09 (US 2)	Grade	Grade (4.16%)	Grade greater than rolling terrain standards (4%)
86.46 – 86.69 (MT 16)	Grade	Grade (4.66%)	Grade greater than rolling terrain standards (4%)
87.84 – 88.12 (MT 16)	Grade	Grade (4.02%)*	Grade greater than rolling terrain standards (4%)
1.41 – 1.55 (MT 16)	Grade	Grade (4.58%)	Grade greater than rolling terrain standards (4%)
2.68 – 3.00 (MT 16)	Grade	Grade (6.00%)	Grade greater than rolling terrain standards (4%)
643.09 (US 2)	Vertical	K-value & SSD	Do not meet level terrain standards
86.69 (MT 16)	Vertical	SSD	Does not meet level terrain standards
1.13 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
1.27 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
1.41 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
1.55 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
1.69 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
1.85 (MT 16)	Vertical	K-value	Does not meet level terrain standards
2.40 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards
2.68 (MT 16)	Vertical	K-value & SSD	Do not meet level terrain standards

*denotes grade is at the maximum allowable grade (4%) for rolling terrain standards.

5.2 Intersections

Although the four intersections studied along US 2 and MT 16 indicate there are no current capacity issues, the geometric layout of each intersection is not sufficient for proper turning movements of large trucks. As it was previously mentioned, trucks occupy two lanes of traffic in order to make the turn.

Improvements should be made to improve geometric elements to provide for semi-trucks and recreational vehicles.

5.3 Access Points

The number of access points and their location are a concern. In particular, the proximity of an access point to an intersection is an issue. Too many access points along the highway and ones that are located too close to an intersection create potentially unsafe conflict points.

5.4 Non-Motorized Infrastructure

With the location of US 2 and MT 16 right through the middle of Culbertson as well as the location of the public school, the inconsistency of bicycle and pedestrian facilities are a concern. Special attention should be given to proper locations, adequate signing and striping, as well as school zone requirements.

5.5 Sight Distance

The sight distance along US 2 and MT 16 through Culbertson is a concern; particularly, the sight distance for vehicles trying to enter or exit the roadway or at intersections. Hindered sight triangles with the increased traffic on these roads could pose a safety risk for the vehicles on the highway and those trying to enter/exit the highway. Several sight obstructions including buildings, signs, and parked/turning vehicles exist within quadrants at various intersections in Culbertson.

5.6 Pavement Conditions

With increased amounts of traffic, especially large trucks, deterioration of the existing roadway pavement is a concern. Large trucks with dual axel configurations pose the biggest threat to the pavement. Also, particular attention should be given to the roadway shoulders as these sometimes have smaller pavement sections than the travel lanes. As trucks have to pull over to the side of the road, or as rear wheels “track” onto the shoulder going through a right turn, the existing pavement can be damaged considerably. Broken up pavement, substantial cracks, and potholes reduce the service life of the roadway and pose a safety risk to the traveling public.

5.7 Truck Traffic

Due to the increased growth of the oil and gas industry in and around the study area, the town of Culbertson has experienced a considerable increase in truck traffic. Although there are no current or projected capacity issues within the study area, the increase in truck traffic associated with the recent boom in the area may result in functional issues in the future. Improvement options should consider anticipated economic growth, improved level of service, and updated roadway design.

5.8 Environmental

Assuming standard avoidance, minimization, and mitigation measures would be utilized if a project moves forward from this study, there do not appear to be any immitigable environmental resource areas.

Appendix A: 2012 Level of Service Analysis

HCM Unsignalized Intersection Capacity Analysis
 43: US-12 & MT-16

6/14/2012

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	47	99	6	5	111	24	4	5	1	28	3	32
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.69	0.77	0.38	0.62	0.75	0.75	0.50	0.62	0.25	0.54	0.38	0.67
Hourly flow rate (vph)	68	129	16	8	148	32	8	8	4	52	8	48
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	180			144			505	469	136	461	461	164
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	180			144			505	469	136	461	461	164
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.3	6.5	6.4
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.7	4.0	3.5
p0 queue free %	95			99			98	98	100	89	98	94
cM capacity (veh/h)	1354			1450			429	468	917	452	473	831
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	212	188	20	108								
Volume Left	68	8	8	52								
Volume Right	16	32	4	48								
cSH	1354	1450	498	569								
Volume to Capacity	0.05	0.01	0.04	0.19								
Queue Length 95th (ft)	4	0	3	17								
Control Delay (s)	2.8	0.4	12.5	12.8								
Lane LOS	A	A	B	B								
Approach Delay (s)	2.8	0.4	12.5	12.8								
Approach LOS			B	B								
Intersection Summary												
Average Delay			4.3									
Intersection Capacity Utilization			30.7%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
 11: US-2/6th St. & M-16/Broadway Ave.

6/14/2012



Movement	EB T	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↩			↩	↩	
Volume (veh/h)	94	32	64	85	33	71
Sign Control	Free			Free	Stop	
Grade	0%			0%	0%	
Peak Hour Factor	0.90	0.50	0.76	0.73	0.89	0.89
Hourly flow rate (vph)	104	64	84	116	37	80
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type	None		None			
Median storage (veh)						
Upstream signal (ft)						
pX, platoon unblocked						
vC, conflicting volume			168		421	136
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol			168		421	136
tC, single (s)			4.2		6.4	6.3
tC, 2 stage (s)						
tF (s)			2.3		3.5	3.4
p0 queue free %			94		93	91
cM capacity (veh/h)			1345		550	889
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total	168	201	117			
Volume Left	0	84	37			
Volume Right	64	0	80			
cSH	1700	1345	744			
Volume to Capacity	0.10	0.06	0.16			
Queue Length 95th (ft)	0	5	14			
Control Delay (s)	0.0	3.6	10.7			
Lane LOS		A	B			
Approach Delay (s)	0.0	3.6	10.7			
Approach LOS			B			
Intersection Summary						
Average Delay			4.1			
Intersection Capacity Utilization			31.1%	ICU Level of Service	A	
Analysis Period (min)			15			

HCS+: Unsignalized Intersections Release 5.6

TWO-WAY STOP CONTROL SUMMARY

Analyst: CDM Smith
 Agency/Co.: MDT
 Date Performed: 6/14/2012
 Analysis Time Period: PM peak
 Intersection: M-16 & 1st
 Jurisdiction:
 Units: U. S. Customary
 Analysis Year: 2012
 Project ID: MT Corridor Study
 East/West Street: 1st Street
 North/South Street: M-16
 Intersection Orientation: NS Study period (hrs): 1.00

Vehicle Volumes and Adjustments

Major Street:	Approach Movement	Northbound				Southbound		
		1 L	2 T	3 R	4 L	5 T	6 R	
Volume					46	35	27	
Peak-Hour Factor, PHF					0.77	0.88	0.75	
Hourly Flow Rate, HFR					59	39	36	
Percent Heavy Vehicles		--	--		26	--	--	
Median Type/Storage		Undivided				/		
RT Channelized?								
Lanes					0	1	0	
Configuration					LTR			
Upstream Signal?		No				No		

Minor Street:	Approach Movement	Westbound			Eastbound		
		7 L	8 T	9 R	10 L	11 T	12 R
Volume		4	9	45	13	44	5
Peak Hour Factor, PHF		0.33	0.56	0.80	0.47	0.83	0.31
Hourly Flow Rate, HFR		12	16	56	27	53	16
Percent Heavy Vehicles		0	0	27	0	0	0
Percent Grade (%)		0				0	
Flared Approach: Exists?/Storage		No			/	No /	
Lanes		0	1	0	0	1	0
Configuration		LTR				LTR	

Delay, Queue Length, and Level of Service

Approach Movement	NB 1	SB 4	Westbound			Eastbound		
			7 	8 LTR	9 	10 	11 LTR	12
Lane Config			LTR	LTR		LTR		
v (vph)		59		84			96	
C(m) (vph)		1479		870			725	
v/c		0.04		0.10			0.13	
95% queue length		0.12		0.32			0.46	
Control Delay		7.5		9.6			10.7	
LOS		A		A			B	
Approach Delay				9.6			10.7	
Approach LOS				A			B	

HCS+: Unsignalized Intersections Release 5.6

Phone: Fax:
E-Mail:

-----TWO-WAY STOP CONTROL(TWSC) ANALYSIS-----

Analyst: CDM Smith
Agency/Co.: MDT
Date Performed: 6/14/2012
Analysis Time Period: PM peak
Intersection: M-16 & 1st
Jurisdiction:
Units: U. S. Customary
Analysis Year: 2012
Project ID: MT Corridor Study
East/West Street: 1st Street
North/South Street: M-16
Intersection Orientation: NS

Study period (hrs): 1.00

-----Vehicle Volumes and Adjustments-----

Major Street Movements	1	2	3	4	5	6
	L	T	R	L	T	R

Volume				46	35	27
Peak-Hour Factor, PHF				0.77	0.88	0.75
Peak-15 Minute Volume				15	10	9
Hourly Flow Rate, HFR				59	39	36
Percent Heavy Vehicles		--	--	26	--	--
Median Type/Storage	Undivided			/		
RT Channelized?						
Lanes				0	1	0
Configuration				LTR		
Upstream Signal?		No		No		

Minor Street Movements	7	8	9	10	11	12
	L	T	R	L	T	R

Volume	4	9	45	13	44	5
Peak Hour Factor, PHF	0.33	0.56	0.80	0.47	0.83	0.31
Peak-15 Minute Volume	3	4	14	7	13	4
Hourly Flow Rate, HFR	12	16	56	27	53	16
Percent Heavy Vehicles	0	0	27	0	0	0
Percent Grade (%)		0			0	
Flared Approach: Exists?/Storage			No	/		No /
RT Channelized?						
Lanes	0	1	0	0	1	0
Configuration		LTR			LTR	

-----Pedestrian Volumes and Adjustments-----

Movements	13	14	15	16
Flow (ped/hr)	0	0	0	0

Lane Width (ft)	12.0	12.0	12.0	12.0
Walking Speed (ft/sec)	4.0	4.0	4.0	4.0
Percent Blockage	0	0	0	0

Upstream Signal Data							
	Prog. Flow vph	Sat Flow vph	Arrival Type	Green Time sec	Cycle Length sec	Prog. Speed mph	Distance to Signal feet
S2	Left-Turn						
	Through						
S5	Left-Turn						
	Through						

Worksheet 3-Data for Computing Effect of Delay to Major Street Vehicles

	Movement 2	Movement 5
Shared ln volume, major th vehicles:		39
Shared ln volume, major rt vehicles:		36
Sat flow rate, major th vehicles:		1700
Sat flow rate, major rt vehicles:		1700
Number of major street through lanes:		1

Worksheet 4-Critical Gap and Follow-up Time Calculation

Critical Gap Calculation									
Movement	1	4	7	8	9	10	11	12	
	L	L	L	T	R	L	T	R	
t(c,base)		4.1	7.1	6.5	6.2	7.1	6.5	6.2	
t(c,hv)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
P(hv)		26	0	0	27	0	0	0	
t(c,g)			0.20	0.20	0.10	0.20	0.20	0.10	
Percent Grade			0.00	0.00	0.00	0.00	0.00	0.00	
t(3,lt)		0.00	0.00	0.00	0.00	0.00	0.00	0.00	
t(c,T): 1-stage	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2-stage	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	
t(c) 1-stage		4.4	7.1	6.5	6.5	7.1	6.5	6.2	
2-stage									

Follow-Up Time Calculations									
Movement	1	4	7	8	9	10	11	12	
	L	L	L	T	R	L	T	R	
t(f,base)		2.20	3.50	4.00	3.30	3.50	4.00	3.30	
t(f,HV)	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	
P(HV)		26	0	0	27	0	0	0	
t(f)		2.4	3.5	4.0	3.5	3.5	4.0	3.3	

Worksheet 5-Effect of Upstream Signals

Computation 1-Queue Clearance Time at Upstream Signal				
	Movement 2		Movement 5	
V prog	V(t)	V(l,prot)	V(t)	V(l,prot)

Total Saturation Flow Rate, s (vph)
 Arrival Type
 Effective Green, g (sec)
 Cycle Length, C (sec)
 Rp (from Exhibit 16-11)
 Proportion vehicles arriving on green P
 g(q1)
 g(q2)
 g(q)

Computation 2-Proportion of TWSC Intersection Time blocked

	Movement 2		Movement 5	
	V(t)	V(l,prot)	V(t)	V(l,prot)

alpha				
beta				
Travel time, t(a) (sec)				
Smoothing Factor, F				
Proportion of conflicting flow, f				
Max platooned flow, V(c,max)				
Min platooned flow, V(c,min)				
Duration of blocked period, t(p)				
Proportion time blocked, p		0.000		0.000

Computation 3-Platoon Event Periods	Result
p(2)	0.000
p(5)	0.000
p(dom)	
p(subo)	
Constrained or unconstrained?	

Proportion unblocked for minor movements, p(x)	(1) Single-stage Process	(2) Two-Stage Process Stage I	(3) Two-Stage Process Stage II
p(1)			
p(4)			
p(7)			
p(8)			
p(9)			
p(10)			
p(11)			
p(12)			

Computation 4 and 5 Single-Stage Process								
Movement	1	4	7	8	9	10	11	12
	L	L	L	T	R	L	T	R
V c, x		0	210	193	0	211	175	57
s								
Px								
V c, u, x								

C r, x								
C plat, x								

Two-Stage Process	7	8	10	11

 Part 2 - Second Stage
 Conflicting Flows
 Potential Capacity
 Pedestrian Impedance Factor
 Cap. Adj. factor due to Impeding mvmnt
 Movement Capacity

 Part 3 - Single Stage
 Conflicting Flows 193 175
 Potential Capacity 706 722
 Pedestrian Impedance Factor 1.00 1.00
 Cap. Adj. factor due to Impeding mvmnt 0.96 0.96
 Movement Capacity 677 692

 Result for 2 stage process:

a
 y
 C t 677 692
 Probability of Queue free St. 0.98 0.92

 Step 4: LT from Minor St. 7 10

 Part 1 - First Stage
 Conflicting Flows
 Potential Capacity
 Pedestrian Impedance Factor
 Cap. Adj. factor due to Impeding mvmnt
 Movement Capacity

 Part 2 - Second Stage
 Conflicting Flows
 Potential Capacity
 Pedestrian Impedance Factor
 Cap. Adj. factor due to Impeding mvmnt
 Movement Capacity

 Part 3 - Single Stage
 Conflicting Flows 210 211
 Potential Capacity 752 750
 Pedestrian Impedance Factor 1.00 1.00
 Maj. L, Min T Impedance factor 0.88 0.94
 Maj. L, Min T Adj. Imp Factor. 0.91 0.95
 Cap. Adj. factor due to Impeding mvmnt 0.90 0.90
 Movement Capacity 675 674

 Results for Two-stage process:

a
 y
 C t 675 674

 Worksheet 8-Shared Lane Calculations

Movement	7 L	8 T	9 R	10 L	11 T	12 R
Volume (vph)	12	16	56	27	53	16
Movement Capacity (vph)	675	677	1016	674	692	1015
Shared Lane Capacity (vph)		870			725	

Worksheet 9-Computation of Effect of Flared Minor Street Approaches

Movement	7 L	8 T	9 R	10 L	11 T	12 R
C sep	675	677	1016	674	692	1015
Volume	12	16	56	27	53	16
Delay						
Q sep						
Q sep +1 round (Qsep +1)						
n max						
C sh		870			725	
SUM C sep						
n						
C act						

Worksheet 10-Delay, Queue Length, and Level of Service

Movement	1	4	7	8	9	10	11	12
Lane Config		LTR		LTR			LTR	
v (vph)		59		84			96	
C(m) (vph)		1479		870			725	
v/c		0.04		0.10			0.13	
95% queue length		0.12		0.32			0.46	
Control Delay		7.5		9.6			10.7	
LOS		A		A			B	
Approach Delay				9.6			10.7	
Approach LOS				A			B	

Worksheet 11-Shared Major LT Impedance and Delay


	Movement 2	Movement 5
p(oj)	1.00	0.96
v(i1), Volume for stream 2 or 5		39
v(i2), Volume for stream 3 or 6		36
s(i1), Saturation flow rate for stream 2 or 5		1700
s(i2), Saturation flow rate for stream 3 or 6		1700
P*(oj)		0.96
d(M,LT), Delay for stream 1 or 4		7.5
N, Number of major street through lanes		1
d(rank,1) Delay for stream 2 or 5		0.3

HCM Unsignalized Intersection Capacity Analysis
 40: MT 16 & County Rd

6/14/2012


												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	4	58	1	0	64	3	2	0	1	5	0	3
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.50	0.81	0.25	0.25	0.70	0.38	0.25	0.25	0.25	0.31	0.25	0.38
Hourly flow rate (vph)	8	72	4	0	91	8	8	0	4	16	0	8
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	99			76			193	189	74	189	187	96
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	99			76			193	189	74	189	187	96
tC, single (s)	4.3			4.1			7.1	6.5	6.2	7.7	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.4			2.2			3.5	4.0	3.3	4.0	4.0	3.3
p0 queue free %	99			100			99	100	100	98	100	99
cM capacity (veh/h)	1361			1536			761	705	994	655	707	967
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	84	99	12	24								
Volume Left	8	0	8	16								
Volume Right	4	8	4	8								
cSH	1361	1536	826	732								
Volume to Capacity	0.01	0.00	0.01	0.03								
Queue Length 95th (ft)	0	0	1	3								
Control Delay (s)	0.8	0.0	9.4	10.1								
Lane LOS	A		A	B								
Approach Delay (s)	0.8	0.0	9.4	10.1								
Approach LOS			A	B								
Intersection Summary												
Average Delay				1.9								
Intersection Capacity Utilization				16.4%	ICU Level of Service				A			
Analysis Period (min)				15								

Appendix B: US 2 Calculations

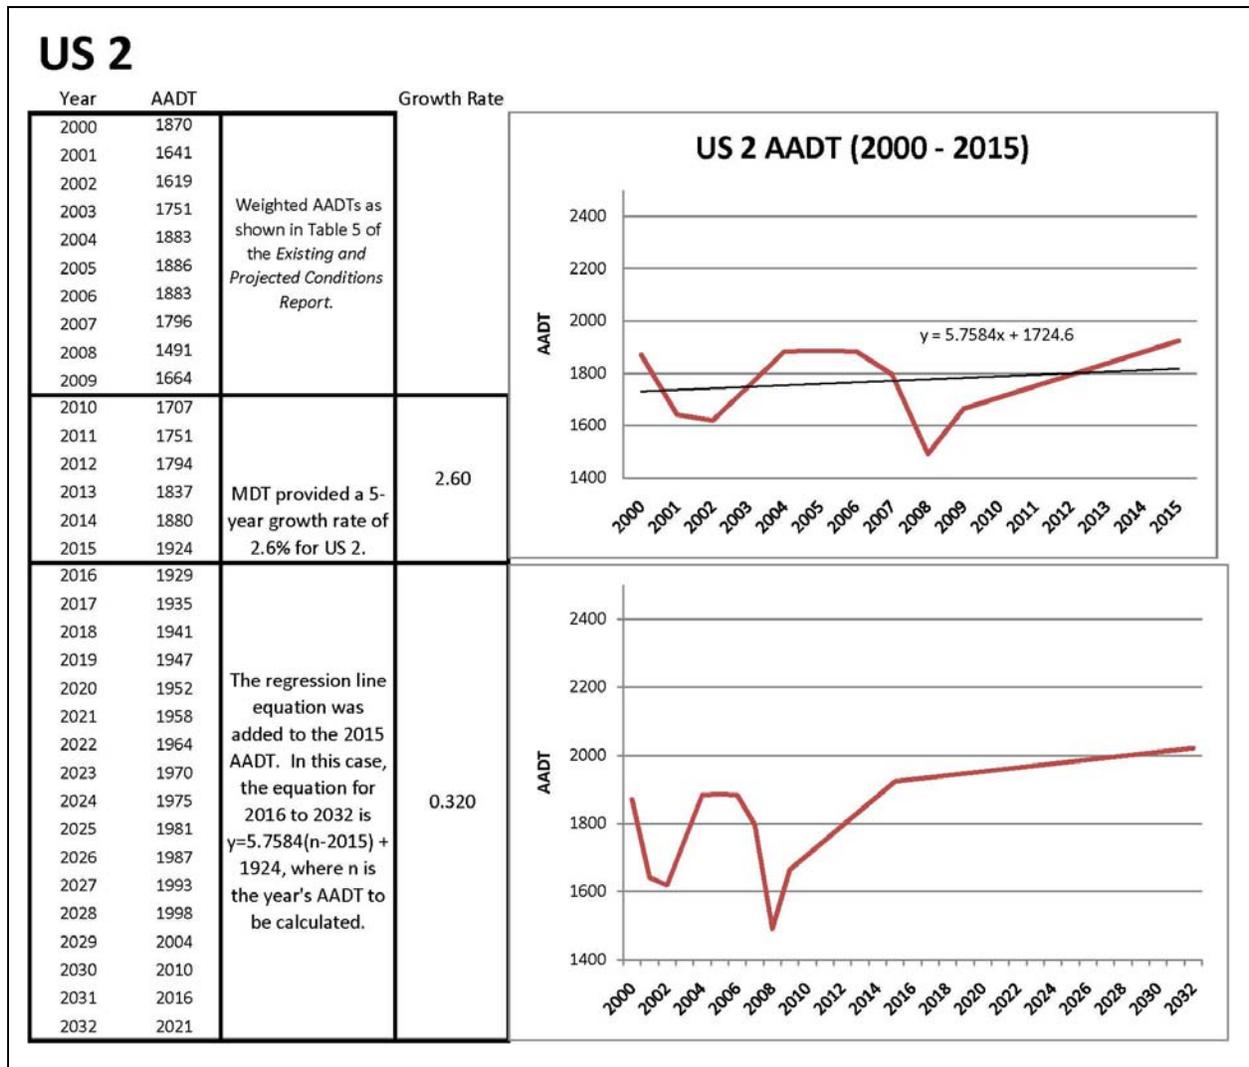


Revised US 2 Projections

Year	AADT	Growth Rate
2000	1870	same
2001	1641	same
2002	1619	same
2003	1751	same
2004	1883	same
2005	1886	same
2006	1883	same
2007	1796	same
2008	1491	same
2009	1664	same
2010	1707	same
2011	1751	same
2012	1794	same
2013	1837	same
2014	1880	same
2015	1924	same
2016	1952	1.50
2017	1981	
2018	2010	
2019	2039	
2020	2068	
2021	2097	
2022	2126	
2023	2154	
2024	2183	
2025	2212	
2026	2241	
2027	2270	
2028	2299	
2029	2328	
2030	2356	
2031	2385	
2032	2414	

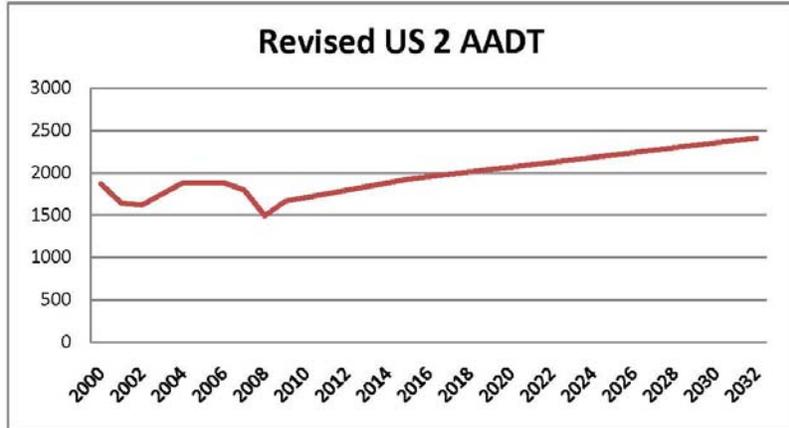



Appendix C: MT 16 (South) Calculations

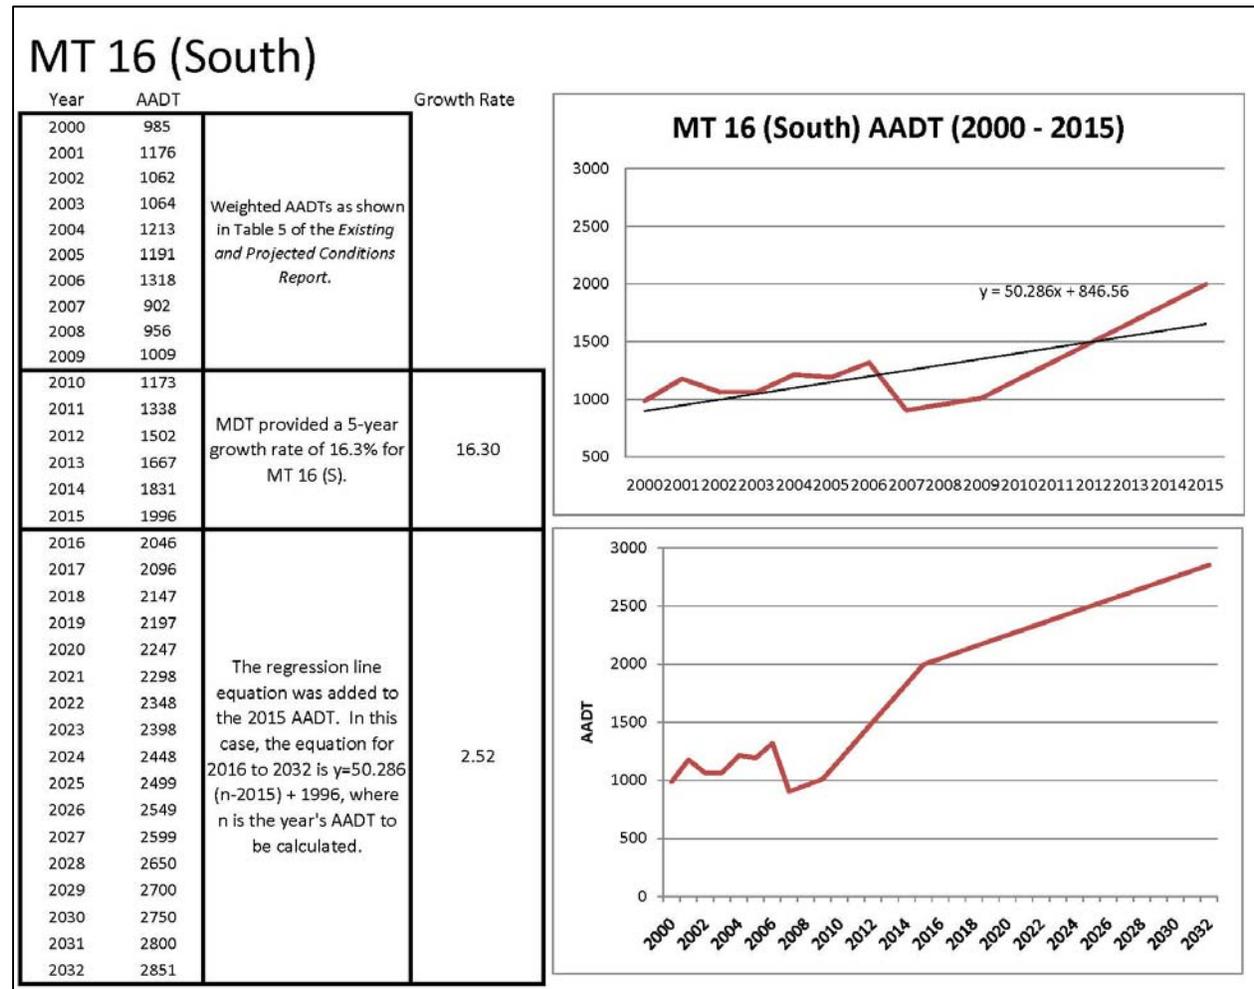

Appendix D: MT 16 (North) Calculations

MT 16 (North)

Year	AADT		Growth Rate
2000	865	Weighted AADTs as shown in Table 5 of the Existing and Projected Conditions Report.	
2001	900		
2002	830		
2003	855		
2004	940		
2005	940		
2006	940		
2007	1090		
2008	885		
2009	1020	MDT provided a 5-year growth rate of 3.2% for MT 16 (N).	3.20
2010	1053		
2011	1085		
2012	1118		
2013	1151		
2014	1183		
2015	1216	The regression line equation was added to the 2015 AADT. In this case, the equation for 2016 to 2032 is $y=24.194(n-2015) + 1216$, where n is the year's AADT to be calculated.	1.99
2016	1240		
2017	1264		
2018	1288		
2019	1313		
2020	1337		
2021	1361		
2022	1385		
2023	1409		
2024	1434		
2025	1458		
2026	1482		
2027	1506		
2028	1530		
2029	1555		
2030	1579		
2031	1603		
2032	1627		

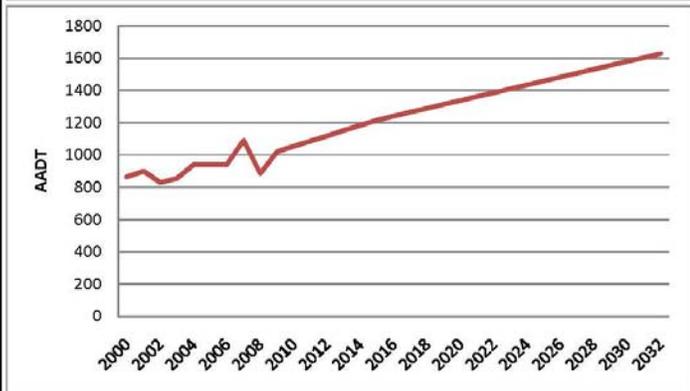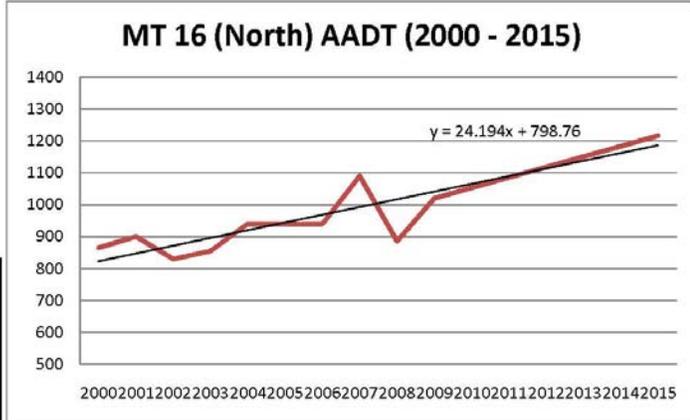

Appendix E: 2032 Level of Service Analysis

HCM Unsignalized Intersection Capacity Analysis
 43: US-12 & MT-16

6/14/2012

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	56	119	7	6	133	29	5	6	1	34	4	38
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.69	0.77	0.38	0.62	0.75	0.75	0.50	0.62	0.25	0.54	0.38	0.67
Hourly flow rate (vph)	81	155	18	10	177	39	10	10	4	63	11	57
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	216			173			604	561	164	551	551	197
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	216			173			604	561	164	551	551	197
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.3	6.5	6.4
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.7	4.0	3.5
p0 queue free %	94			99			97	98	100	84	97	93
cM capacity (veh/h)	1313			1416			357	409	886	387	414	796
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	254	226	24	130								
Volume Left	81	10	10	63								
Volume Right	18	39	4	57								
cSH	1313	1416	421	502								
Volume to Capacity	0.06	0.01	0.06	0.26								
Queue Length 95th (ft)	5	1	4	26								
Control Delay (s)	2.9	0.4	14.1	14.7								
Lane LOS	A	A	B	B								
Approach Delay (s)	2.9	0.4	14.1	14.7								
Approach LOS			B	B								
Intersection Summary												
Average Delay			4.8									
Intersection Capacity Utilization			34.7%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
 11: US-2/6th St. & M-16/Broadway Ave.

6/14/2012



Movement	EB T	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↩			↩	↩	
Volume (veh/h)	113	38	77	102	40	85
Sign Control	Free			Free	Stop	
Grade	0%			0%	0%	
Peak Hour Factor	0.90	0.50	0.76	0.73	0.89	0.89
Hourly flow rate (vph)	126	76	101	140	45	96
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type	None		None			
Median storage (veh)						
Upstream signal (ft)						
pX, platoon unblocked						
vC, conflicting volume			202		506	164
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol			202		506	164
tC, single (s)			4.2		6.4	6.3
tC, 2 stage (s)						
tF (s)			2.3		3.5	3.4
p0 queue free %			92		91	89
cM capacity (veh/h)			1307		484	858
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total	202	241	140			
Volume Left	0	101	45			
Volume Right	76	0	96			
cSH	1700	1307	688			
Volume to Capacity	0.12	0.08	0.20			
Queue Length 95th (ft)	0	6	19			
Control Delay (s)	0.0	3.7	11.6			
Lane LOS		A	B			
Approach Delay (s)	0.0	3.7	11.6			
Approach LOS			B			
Intersection Summary						
Average Delay			4.3			
Intersection Capacity Utilization			35.3%	ICU Level of Service	A	
Analysis Period (min)			15			

HCS+: Unsignalized Intersections Release 5.6

TWO-WAY STOP CONTROL SUMMARY

Analyst: CDM Smith
 Agency/Co.: MDT
 Date Performed: 6/14/2012
 Analysis Time Period: PM peak
 Intersection: M-16 & 1st
 Jurisdiction:
 Units: U. S. Customary
 Analysis Year: 2032
 Project ID: MT Corridor Study
 East/West Street: 1st Street
 North/South Street: M-16
 Intersection Orientation: NS Study period (hrs): 1.00

Vehicle Volumes and Adjustments

Major Street:	Approach Movement	Northbound				Southbound		
		1 L	2 T	3 R	4 L	5 T	6 R	
Volume					55	42	32	
Peak-Hour Factor, PHF					0.77	0.88	0.75	
Hourly Flow Rate, HFR					71	47	42	
Percent Heavy Vehicles		--	--		26	--	--	
Median Type/Storage		Undivided				/		
RT Channelized?								
Lanes					0	1	0	
Configuration					LTR			
Upstream Signal?		No				No		

Minor Street:	Approach Movement	Westbound			Eastbound		
		7 L	8 T	9 R	10 L	11 T	12 R
Volume		5	11	54	16	53	6
Peak Hour Factor, PHF		0.33	0.56	0.80	0.47	0.83	0.31
Hourly Flow Rate, HFR		15	19	67	34	63	19
Percent Heavy Vehicles		0	0	27	0	0	0
Percent Grade (%)		0				0	
Flared Approach: Exists?/Storage		No			/		No /
Lanes		0	1	0	0	1	0
Configuration		LTR				LTR	

Delay, Queue Length, and Level of Service

Approach Movement	NB	SB	Westbound			Eastbound		
			4	7	8	9	10	11
Lane Config	1		LTR		LTR			LTR
v (vph)		71			101			116
C(m) (vph)		1479			842			682
v/c		0.05			0.12			0.17
95% queue length		0.15			0.41			0.61
Control Delay		7.6			9.9			11.4
LOS		A			A			B
Approach Delay					9.9			11.4
Approach LOS					A			B

HCS+: Unsignalized Intersections Release 5.6

Phone: Fax:
E-Mail:

-----TWO-WAY STOP CONTROL(TWSC) ANALYSIS-----

Analyst: CDM Smith
Agency/Co.: MDT
Date Performed: 6/14/2012
Analysis Time Period: PM peak
Intersection: M-16 & 1st
Jurisdiction:
Units: U. S. Customary
Analysis Year: 2032
Project ID: MT Corridor Study
East/West Street: 1st Street
North/South Street: M-16
Intersection Orientation: NS

Study period (hrs): 1.00

-----Vehicle Volumes and Adjustments-----

Major Street Movements	1	2	3	4	5	6
	L	T	R	L	T	R

Volume				55	42	32
Peak-Hour Factor, PHF				0.77	0.88	0.75
Peak-15 Minute Volume				18	12	11
Hourly Flow Rate, HFR				71	47	42
Percent Heavy Vehicles		--	--	26	--	--
Median Type/Storage	Undivided			/		
RT Channelized?						
Lanes				0	1	0
Configuration				LTR		
Upstream Signal?		No		No		

Minor Street Movements	7	8	9	10	11	12
	L	T	R	L	T	R

Volume	5	11	54	16	53	6
Peak Hour Factor, PHF	0.33	0.56	0.80	0.47	0.83	0.31
Peak-15 Minute Volume	4	5	17	9	16	5
Hourly Flow Rate, HFR	15	19	67	34	63	19
Percent Heavy Vehicles	0	0	27	0	0	0
Percent Grade (%)	0			0		
Flared Approach: Exists?/Storage			No	/	No /	
RT Channelized?						
Lanes	0	1	0	0	1	0
Configuration	LTR			LTR		

-----Pedestrian Volumes and Adjustments-----

Movements	13	14	15	16
-----------	----	----	----	----

Flow (ped/hr)	0	0	0	0
---------------	---	---	---	---

Lane Width (ft)	12.0	12.0	12.0	12.0
Walking Speed (ft/sec)	4.0	4.0	4.0	4.0
Percent Blockage	0	0	0	0

Upstream Signal Data							
	Prog. Flow vph	Sat Flow vph	Arrival Type	Green Time sec	Cycle Length sec	Prog. Speed mph	Distance to Signal feet
S2	Left-Turn						
	Through						
S5	Left-Turn						
	Through						

Worksheet 3-Data for Computing Effect of Delay to Major Street Vehicles

	Movement 2	Movement 5
Shared ln volume, major th vehicles:		47
Shared ln volume, major rt vehicles:		42
Sat flow rate, major th vehicles:		1700
Sat flow rate, major rt vehicles:		1700
Number of major street through lanes:		1

Worksheet 4-Critical Gap and Follow-up Time Calculation

Critical Gap Calculation									
Movement	1	4	7	8	9	10	11	12	
	L	L	L	T	R	L	T	R	
t(c,base)		4.1	7.1	6.5	6.2	7.1	6.5	6.2	
t(c,hv)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
P(hv)		26	0	0	27	0	0	0	
t(c,g)			0.20	0.20	0.10	0.20	0.20	0.10	
Percent Grade			0.00	0.00	0.00	0.00	0.00	0.00	
t(3,lt)		0.00	0.00	0.00	0.00	0.00	0.00	0.00	
t(c,T): 1-stage	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2-stage	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00	
t(c) 1-stage		4.4	7.1	6.5	6.5	7.1	6.5	6.2	
2-stage									

Follow-Up Time Calculations									
Movement	1	4	7	8	9	10	11	12	
	L	L	L	T	R	L	T	R	
t(f,base)		2.20	3.50	4.00	3.30	3.50	4.00	3.30	
t(f,HV)	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	
P(HV)		26	0	0	27	0	0	0	
t(f)		2.4	3.5	4.0	3.5	3.5	4.0	3.3	

Worksheet 5-Effect of Upstream Signals

Computation 1-Queue Clearance Time at Upstream Signal				
	Movement 2		Movement 5	
V prog	V(t)	V(l,prot)	V(t)	V(l,prot)

Total Saturation Flow Rate, s (vph)
 Arrival Type
 Effective Green, g (sec)
 Cycle Length, C (sec)
 Rp (from Exhibit 16-11)
 Proportion vehicles arriving on green P
 g(q1)
 g(q2)
 g(q)

 Computation 2-Proportion of TWSC Intersection Time blocked
 Movement 2 Movement 5
 V(t) V(l,prot) V(t) V(l,prot)

alpha
 beta
 Travel time, t(a) (sec)
 Smoothing Factor, F
 Proportion of conflicting flow, f
 Max platooned flow, V(c,max)
 Min platooned flow, V(c,min)
 Duration of blocked period, t(p)
 Proportion time blocked, p 0.000 0.000

 Computation 3-Platoon Event Periods Result

 p(2) 0.000
 p(5) 0.000
 p(dom)
 p(subo)
 Constrained or unconstrained?

 Proportion unblocked (1) (2) (3)
 for minor Single-stage Two-Stage Process
 movements, p(x) Process Stage I Stage II

 p(1)
 p(4)
 p(7)
 p(8)
 p(9)
 p(10)
 p(11)
 p(12)

 Computation 4 and 5
 Single-Stage Process
 Movement 1 4 7 8 9 10 11 12
 L L L T R L T R

 V c,x 0 251 231 0 253 210 68
 s
 Px
 V c,u,x

C r,x
 C plat,x

 Two-Stage Process 7 8 10 11

Worksheet 9-Computation of Effect of Flared Minor Street Approaches

Movement	7 L	8 T	9 R	10 L	11 T	12 R
C sep	618	638	1016	618	656	1001
Volume	15	19	67	34	63	19
Delay						
Q sep						
Q sep +1 round (Qsep +1)						
n max						
C sh		842			682	
SUM C sep						
n						
C act						

Worksheet 10-Delay, Queue Length, and Level of Service

Movement	1	4	7	8	9	10	11	12
Lane Config		LTR		LTR			LTR	
v (vph)		71		101			116	
C(m) (vph)		1479		842			682	
v/c		0.05		0.12			0.17	
95% queue length		0.15		0.41			0.61	
Control Delay		7.6		9.9			11.4	
LOS		A		A			B	
Approach Delay				9.9			11.4	
Approach LOS				A			B	

Worksheet 11-Shared Major LT Impedance and Delay

	Movement 2	Movement 5
p(oj)	1.00	0.95
v(i1), Volume for stream 2 or 5		47
v(i2), Volume for stream 3 or 6		42
s(i1), Saturation flow rate for stream 2 or 5		1700
s(i2), Saturation flow rate for stream 3 or 6		1700
P*(oj)		0.95
d(M,LT), Delay for stream 1 or 4		7.6
N, Number of major street through lanes		1
d(rank,1) Delay for stream 2 or 5		0.4

HCM Unsignalized Intersection Capacity Analysis
 40: MT 16 & County Rd

6/14/2012

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	5	70	1	0	77	4	2	0	1	6	0	4
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.50	0.81	0.25	0.25	0.70	0.38	0.25	0.25	0.25	0.31	0.25	0.38
Hourly flow rate (vph)	10	86	4	0	110	11	8	0	4	19	0	11
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	121			90			234	229	88	228	226	115
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	121			90			234	229	88	228	226	115
tC, single (s)	4.3			4.1			7.1	6.5	6.2	7.7	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.4			2.2			3.5	4.0	3.3	4.0	4.0	3.3
p0 queue free %	99			100			99	100	100	97	100	99
cM capacity (veh/h)	1336			1517			712	669	975	614	672	943
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	100	121	12	30								
Volume Left	10	0	8	19								
Volume Right	4	11	4	11								
cSH	1336	1517	783	700								
Volume to Capacity	0.01	0.00	0.02	0.04								
Queue Length 95th (ft)	1	0	1	3								
Control Delay (s)	0.8	0.0	9.7	10.4								
Lane LOS	A		A	B								
Approach Delay (s)	0.8	0.0	9.7	10.4								
Approach LOS			A	B								
Intersection Summary												
Average Delay				1.9								
Intersection Capacity Utilization				17.9%	ICU Level of Service	A						
Analysis Period (min)				15								

Culbertson Corridor Planning Study

NEEDS AND OBJECTIVES

April 2012

Prepared for:

Montana Department of Transportation



Prepared by:

CDM Smith

Helena, Montana



Table of Contents

Needs and Objectives	2
1.1 Need Number 1: Improve Safety of US 2 and MT 16.....	2
1.2 Need Number 2: Improve Operations of US 2 and MT 16.....	2
1.3 Need Number 3: Minimize Environmental and Transportation Impacts	2
1.4 Other Objectives	2

Needs and Objectives

Needs and objectives for the Culbertson Corridor Planning Study have been identified based on a review of information contained in the *Existing and Projected Conditions* and *Environmental Scan* reports, as well as input from the community, local government, resource agencies, and oversight committee. The needs and objectives contained in this document will assist in the development of potential improvement options within the study area. Note the objectives followed by an asterisk (*) support the goals and objectives contained in the Town of Culbertson Growth Policy Update (2011).

1.1 *Need Number 1: Improve Safety of US 2 and MT 16*

Objectives

- Improve pedestrian crossing safety near the school.*
- Enhance pedestrian movements along US 2 and MT 16, to the extent practicable.
- Improve intersection sight distance, to the extent practicable.

1.2 *Need Number 2: Improve Operations of US 2 and MT 16*

Objectives

- Improve geometric elements to provide for semi-trucks and recreational vehicles, to the extent practicable.
- Accommodate current and future capacity demands for US 2 and MT 16, to the extent practicable.
- Accommodate unique turning movements for wide and over length loads, to the extent practicable.

1.3 *Need Number 3: Minimize Environmental and Transportation Impacts*

Objectives

- Minimize impacts to the social, economic, and natural environment, to the extent practicable.*
- Minimize impacts associated with access points and roadside parking, to the extent practicable.
- Minimize the impacts of increased truck traffic through Study area.

1.4 *Other Objectives*

- Construction feasibility
- Availability and feasibility of funding

Culbertson Corridor Planning Study

IMPROVEMENT OPTIONS REPORT

August 2012

Prepared for:

Montana Department of Transportation



Prepared by:

CDM Smith

Helena, Montana



Table of Contents

Improvement Options.....	1
1.1 Improvement Option Categories	1
1.1.1 Non-Motorized Infrastructure	2
1.1.2 Geometrics, Sight Distance, and Pavement Conditions.....	4
1.1.3 Truck Traffic	6
1.1.4 Access Points.....	9
1.1.5 Community Area of Concern.....	9
1.2 Improvement Options Considered But Not Advanced	10
1.2.1 Traffic Signal or Roundabout at MT 16(north) / US 2 Intersection.....	10
1.2.2 Install Left Turn Lane on MT 16(north)	10
1.2.3 Install Turn Lanes on US 2	10
1.2.4 Convert Old Weigh Scale Area to Parking Lot.....	11
1.2.5 3 rd Avenue East Truck Route Designation	11

List of Figures

Figure 1. Improvement Options.....	2
------------------------------------	---

Appendix A: Improvement Option Forms

Improvement Options

The town of Culbertson has experienced a considerable increase in truck traffic through town due to the increased growth of the oil and gas industry in and around the study area. The purpose of this Technical Memorandum is to look at improvement options that would address needs and objectives in the area.

The corridor needs and objectives developed for this study led to the development of a range of improvement options that address corridor issues and areas of concern. The information that follows provides descriptions, evaluations, and planning level cost estimates of recommended improvement options. Planning level costs are for construction costs only in 2012 dollars. The planning level costs do not include right-of-way acquisition, utility relocation, preliminary engineering, or construction engineering.

Improvement options were categorized into implementation timeframes. Short-term options could likely be implemented within 2 years. Mid-term options could likely be implemented between 2 and 5 years while long-term options would likely not be implemented for more than five years. Long-term options are addressed in the *Alternate Routes* report.

1.1 *Improvement Option Categories*

Improvement options on the existing network were considered and recommended to address the corridor needs, objectives, issues, and/or areas of concern. Recommended improvement options were grouped into the following five different categories:

- Non-Motorized Infrastructure
- Geometrics, Sight Distance, and Pavement Conditions
- Truck Traffic
- Access Points
- Community Area of Concern

The various improvement option types are discussed in the following sections. These improvement options are also shown in Appendix A. Figure 1 shows the approximate location of the potential improvement options.

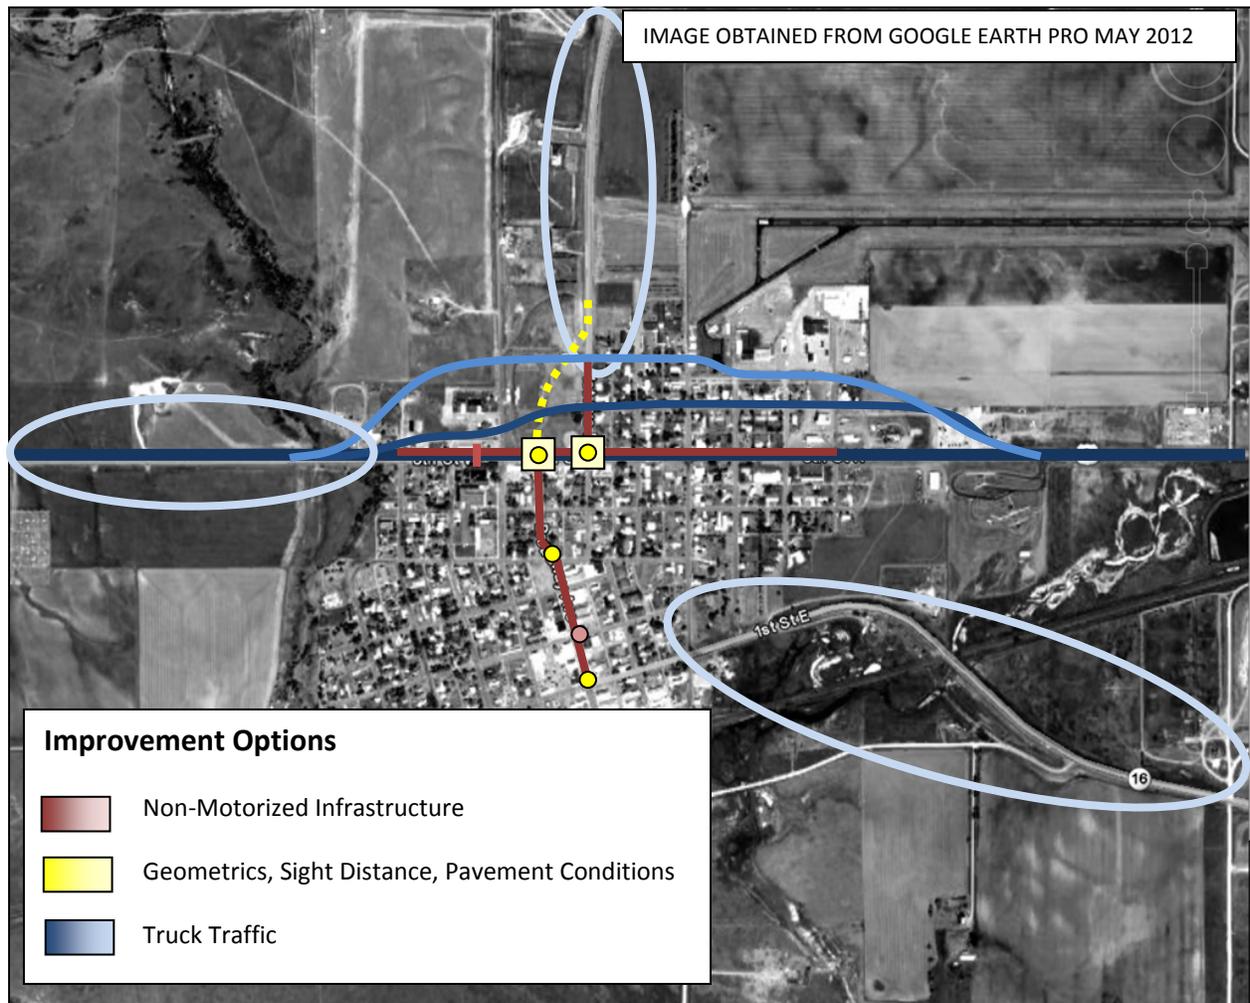


Figure 1. Improvement Options

1.1.1 Non-Motorized Infrastructure

Additional non-motorized studies and infrastructure are needed in the Study area because of the limited pedestrian travel interconnectivity throughout both the Town and surrounding areas. This limited interconnectivity either discourages pedestrian travel or requires pedestrians to use the roadway in several portions of the Study area. Non-motorized studies and infrastructure have the potential to enhance pedestrian movements along US 2 and MT 16, improve pedestrian crossing safety near the school, and minimize impacts associated with access points and roadside parking.

Improvement Option Number 1: Urban Amenities on MT 16 and US 2

This improvement option would update the typical section of US 2 and MT 16 to include urban amenities (curb and gutter and sidewalks). This would take place within the incorporated city limits (i.e., approximately MP 644.2 to 645.5 along US 2, MP 88.6 to 88.1 along MT 16 (north), and MP 0 to the Broadway Avenue/1st Street West intersection along MT 16 (south)). Sidewalks would be implemented

on both sides of US 2 where they do not currently exist to enhance pedestrian movements. Curb and gutter would be implemented along both sides of US 2 to address surface water flow, delineate current access points, and provide access control for future businesses that may develop within the incorporated city limits. This improvement as a whole is considered mid-term, but could be broken into smaller, short-term improvement options as funding becomes available.

Project Timeline: Mid-Term Implementation (2-5 years)

Estimated Cost: \$1,000,000 to \$1,200,000

Improvement Option Number 2: Rectangular Rapid Flashing Beacon (RRFB)

One crosswalk is located on US 2 between the Culbertson Public Schools and the adjacent convenience store to the north, currently called Val-Am Stop & Go. This crosswalk is located mid-block and is primarily used by school-aged children to access the convenience store and also to access the Culbertson Schools Recreation Complex. With the percentage of trucks traversing the corridor and the speed limit change so close to this crosswalk location, this has the potential to be a safety concern. One objective for this study is to improve pedestrian crossing safety near the school.

Because a signed and striped crosswalk currently exists along US 2 between 1st Avenue West and 2nd Avenue West, this improvement option calls for the enhancement of the crosswalk through the installation of a highly visible Rectangular Rapid Flashing Beacon (RRFB). Due to the low material cost of this improvement option, it has been classified as follows:

Project Timeline: Short-Term Implementation (0-2 years)

Estimated Cost: \$5,000 to \$10,000

Improvement Option Number 3: Non-Motorized Transportation Plan

It is recommended that the City or the County completes a non-motorized transportation plan in order to identify potential bicycle and pedestrian needs and potential mitigation measures to address these needs, not only for school-aged children, but for all pedestrians traversing the Study area. This plan would encompass the area within the incorporated city limits (i.e., approximately MP 644.2 to 645.5 along US 2, MP 88.6 to 88.1 along MT 16 (north), and MP 0 to 1.2 along MT 16 (south)).

Due to the lack of construction coupled with the low cost to complete this study, this option has been classified as follows:

Project Timeline: Short-Term Implementation (0-2 years)

Estimated Cost: \$50,000 to \$60,000

Improvement Option Number 4: Bulb-Out

During the first public informational meeting, local residents noted that the intersection of MT 16 (south) and 2nd Street is dangerous due to the sight distance related to the proximity of business parking to the intersection and the number of pedestrians that want to travel between businesses on both sides of MT 16 (south). Currently, no signed or striped crosswalk exists between downtown businesses located along both sides of MT 16 (south). With the percentage of trucks traversing the corridor, this has the potential to be a safety concern. One objective for this study is to enhance

pedestrian movements along US 2 and MT 16, to the extent practicable. Another objective is to improve intersection sight distance, to the extent practicable.

Design and implementation should be considered to heighten pedestrian visibility at this intersection. Curb bulb-outs or other infrastructure would increase awareness to pedestrians. The bulb-out improvement should be done with sensitivity to drainage considerations, snow plowing operations, and local truck and vehicle turning movements. Shifting street parking away from the intersection would also heighten pedestrian visibility and assist the sight distance issue. There are currently multiple businesses along Broadway Avenue/MT 16 and off this main thoroughfare that require trucks or other large vehicles to turn onto local roadways. For those businesses located along Broadway Avenue/MT 16, most use adjacent streets or alleyways to park and then walk the freight to the respective businesses. Because school bus parking and the Farm Equipment Sales Incorporated business are both located to the west of the intersection, more trucks and large vehicles are using 2nd Street west of Broadway Avenue. To avoid potential conflicts with trucks turning between Broadway Avenue and 2nd Street west of Broadway Avenue, a curb bulb-out is only recommended on the east side of Broadway Avenue parallel to 2nd Street. To improve sight distance on the west side of the intersection, parking restrictions could also be considered. Due to the low material cost of this improvement option it has been classified as follows:

Project Timeline: Short-Term Implementation (0-2 years)

Estimated Cost: \$10,000 to \$12,000

Non-Motorized Improvement Options Summary

All non-motorized infrastructure options presented in this section would be independent of each other. However, a non-motorized transportation plan may identify better improvement option(s) and/or specific locations to heighten awareness of pedestrians traversing US 2 and MT 16.

1.1.2 Geometrics, Sight Distance, and Pavement Conditions

Many intersections on US 2 and MT 16 in Culbertson are a concern is due to multiple factors including the limited sight distance, high number of left-turning trucks, and substandard geometrics. One objective for this study is to improve intersection sight distance along US 2 and MT 16. Another objective for the study is to improve geometric elements to provide for semi-trucks and recreational vehicles.

Improvement Option Number 5: Geometric Upgrade of MT 16 (north) / US 2 Intersection

This improvement option requires the intersection of MT 16 (north) / US 2 to be upgraded to meet current MDT design standards to accommodate the WB-67 design vehicle. By bringing the intersection up to current MDT design standards, the objective to improve geometric elements to provide for semi-trucks would be met. Due to the need for design in upgrading an intersection along with the need to purchase right-of-way, and the overall cost of construction, this option has been classified as follows:

Project Timeline: Mid-Term Implementation (2-5 years)

Estimated Cost: \$300,000 to \$400,000

Improvement Option Number 6: Upgrade MT 16 (south) / US 2 Intersection

The geometric layout of the intersection of MT 16 (south) and US 2 is not sufficient for proper turning movements of large trucks going through the intersection as trucks occupy two lanes in order to make the turn. With increased amounts of traffic, especially large trucks, deterioration of the existing roadway pavement is a concern. Large trucks with dual axel configurations pose the biggest threat to the pavement. Also, particular attention should be given to the roadway shoulders. As trucks have to pull over to the side of the road, or as rear wheels “track” onto the shoulder going through a right turn, the existing pavement can be damaged considerably. Broken up pavement, substantial cracks, and potholes reduce the service life of the roadway and pose a safety risk to the traveling public.

Upgrade the intersection to meet current MDT design standards to accommodate the WB-67 design vehicle. This upgrade would include improvements to the pavement section of the MT 16 (south) by adding a concrete element or other means. Improving the pavement section may be implemented with the existing Broadway Avenue rehabilitation project [NH 62-1(10)0 MT 16-Culbertson] that the MDT Glendive District is currently working on. In order to upgrade the intersection, additional right-of-way would be required on either side. The Oelkers Carter Service Center located in the southeast quadrant of the intersection is a potential 4(f) property which may require additional environmental consideration under this improvement option. Due to the need for design in upgrading an intersection along with the need to purchase right-of-way, and the overall cost of construction, this option has been classified as follows:

Project Timeline: Mid-Term Implementation (2-5 years)

Estimated Cost: \$200,000 to \$300,000

Improvement Option Number 7: MT 16 (North) Realignment

When considered together, the geometric layout of the intersections of MT 16 with US 2 is not sufficient for proper turning movements of large trucks. The two sequential 90-degree turns on the two lane facilities located within one block of each other has the potential to cause congestion and safety issues for not only heavy vehicles, but for other vehicles behind them. Although there are no current or projected capacity issues at either intersection of MT 16 with US 2, this option has the potential to address the need to improve operations of US 2 and MT 16.

This improvement option considers realigning the existing MT 16 (north) roadway to line up with MT 16 (south). In order to implement this option, right-of-way would need to be purchased along the new route’s entirety. Due to the impacts to the recreational fields, this entire facility would need to be relocated. If this improvement option was implemented, it would be designed to meet current MDT design standards to accommodate the WB-67 design vehicle. Although the intersection of MT 16 (north) and 8th Street would remain open for emergency services accessibility, the small portion of MT 16 (north) located north of 8th Street would be removed. Due to the need for design of the new roadway, the need to purchase right-of-way, and the overall cost of construction, this option has been classified as follows:

Project Timeline: Long-Term Implementation (5+ years)

Estimated Cost: \$500,000 to \$600,000

Improvement Option Number 8: Sight Distance Improvements at Project Intersections

In order to improve sight distance throughout the Study area, signs located in sight distance triangles at all quadrants of an intersection should be removed and/or relocated, to the extent practicable. This improvement includes the intersections of MT 16 (north) / US 2, MT 16 (south) / US 2, Broadway Avenue / 4th Street, and Broadway Avenue / 1st Street. On-street parking near these intersections should also be eliminated, to the extent practicable. However, MDT has very limited enforcement power over signs outside highway right-of-way and over parking restrictions. It would be more appropriate for Culbertson to pass an ordinance regarding sight distance and/or parking restrictions if the community considers this improvement option necessary. Because of the low cost and the increased involvement of the Town of Culbertson, this option has been classified as follows:

Project Timeline: Short-Term Implementation (0-2 years)

Estimated Cost: \$20,000 to \$25,000

Geometric Improvement Options Summary

Options to upgrade the intersections of MT 16 with US 2 should both be considered together. If the option to realign MT 16 (north) is considered, upgrades to the intersection of MT 16 (south) and US 2 should also be considered at that time; however, consideration of the option to realign MT 16 (north) would negate the need to improve the current intersection of MT 16 (north) and US 2. Sight distance improvements at the identified project intersections should be considered regardless of what other improvement options are implemented.

1.1.3 Truck Traffic

Culbertson has experienced greatly increased truck traffic through town because of the booming oil industry in and around the Study area. Improvement options in this section have the potential to address the study objective of minimizing the impacts of increased truck traffic through the Study area.

Improvement Option Number 9: Four Lane US 2

Since an EA was previously prepared for US 2 in the Culbertson area, it was necessary to evaluate the 4-lane facility in this improvement option process. The *Culbertson – East to North Dakota EA* investigated a four-lane facility on US 2 from the intersection of MT 16 (north) at approximate Reference Post (RP) 644.6 to the North Dakota state line, which is beyond the Study area boundary for this project. The Town of Culbertson noted their preferred typical section from the intersection of MT 16 (north) to the eastern incorporated city limits located at approximate RP 645.0 would be composed of two five-foot sidewalks, curb and gutter on both sides of the roadway, two five-foot shoulders, two 12-foot outside travel lanes, and two 11-foot inside travel lanes. There would be no on-street parking. As the roadway leaves Culbertson, the curb and gutter and sidewalks would be terminated but the roadway would remain in a four-lane undivided configuration with eight-foot shoulders and four 12-foot traveling lanes. This configuration would extend to a point west of the Clover Creek bridge where it would transition to a divided four-lane section. The Culbertson EA noted that the four-lane facility would provide benefits

related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design.¹

In order to be consistent with the proposed action of the Culbertson EA, US 2 to the west of MT 16 (north) would continue the four lane configuration with sidewalks to the western edge of incorporated city limits at approximate RP 644.3. As US 2 reached the west end of Culbertson, the typical section would transition to an undivided four-lane with eight-foot shoulders until it reached the Study area boundary at approximate RP 642.8.

The four-lane typical section for US 2 through the Study area would be a long-term solution that is consistent with the local planning efforts including the Culbertson EA and the Town of Culbertson's 2011 Growth Policy. New bridges and/or large culverts would be necessary to cross Diamond Creek, Clover Creek, and blue line intermittent streams. Adjacent floodplains would be impacted. This route has the potential to encroach on the Eastern Red Bat, Great Blue Heron, Western Hog-nosed Snake, and habitat for the Whooping Crane. Due to the proximity of a number of hazardous material sites and 4(f) and 6(f) sites, the route's ability to impact or avoid these sites would be determined during final design if this route were carried forward from this Study. To be consistent with local planning efforts including the Culbertson EA and the Town of Culbertson's 2011 Growth Policy, and due to the cost of implementation, this improvement option has been classified as follows:

Project Timeline: Long-Term Implementation (5+ years)

Estimated Cost: \$16,500,000 to \$20,000,000*

**It should be noted that this cost was based on the overall cost given in the 2008 EA, which is in 2008 dollars and includes construction costs and preliminary right-of-way costs.*

Improvement Option Number 10: 7th Street Couplet

Although there are no current or projected capacity issues along US 2, the increase in traffic volumes associated with the recent boom in the oil and gas industry may result in functional issues in the future. The Culbertson-East to North Dakota EA identified a proposed action to incorporate a four-lane facility along US 2. The Culbertson EA noted that the four-lane facility would provide benefits related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design. Although a couplet was not addressed in the Culbertson EA, it could be a design option that would allow for consistency and continuity of a four-lane facility.

As a re-evaluation of the US 2 four-lane facility included in the Culbertson EA, a couplet along 7th Street was explored. This option consists of a couplet utilizing the existing US 2 for the eastbound direction and 7th Street and portions of developed land for the westbound direction. The west end of 7th Street would bisect a residential area and tie into US 2 near Diamond Creek. The east end of 7th Street would bisect a residential/industrial area and tie into US 2 near the weigh scale. The recreational fields would be impacted and would need to be relocated. The cost estimate takes into account urban amenity

¹ Montana Department of Transportation, Culbertson – East to North Dakota Environmental Assessment, 2008.

improvements along US 2 and urban rehabilitation and new urban roadway along 7th Street. Due to the cost of implementation, this improvement option has been classified as follows:

Project Timeline: Long-Term Implementation (5+ years)

Estimated Cost: \$3,200,000 to \$3,800,000

Improvement Option Number 11: 8th Street Couplet

Although there are no current or projected capacity issues along US 2, the increase in traffic volumes associated with the recent boom in the oil and gas industry may result in functional issues in the future. The Culbertson-East to North Dakota EA identified a proposed action to incorporate a four-lane facility along US 2. The Culbertson EA noted that the four-lane facility would provide benefits related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design. Although a couplet was not addressed in the Culbertson EA, it would be a design option that would allow for consistency and continuity of a four-lane facility.

As a re-evaluation of the four-lane facility along US 2 included in the Culbertson EA, a couplet along 8th Street was explored to minimize impacts to the recreational fields. This option consists of a couplet utilizing the existing US 2 for the eastbound direction and 8th Street and portions of developed land for the westbound direction. The west end of 8th Street would minimize impacts to the recreational fields and residential area to the extent practicable before intersecting US 2 near Diamond Creek. The east end of 8th Street would bisect a residential/industrial area and tie into US 2 near the weigh scale. This option would minimize impacts to the recreational fields and the airport to the extent practicable; however, more curves in the alignment would be required. The cost estimate takes into account urban amenity improvements along US 2 and urban rehabilitation and new urban roadway along 8th Street. Due to the cost of implementation, this improvement option has been classified as follows:

Project Timeline: Long-Term Implementation (5+ years)

Estimated Cost: \$3,200,000 to \$3,800,000

Improvement Option Number 12: Weigh-in-Motion Systems

All trucks entering the Study area from the east, west, and south and some trucks entering from the north must first proceed to the weigh scale, which means some trucks make two passes through Culbertson before they can proceed to their destination.

This improvement option includes the installation of three WIM systems: one on US 2 west of Culbertson, one on MT 16 (south), and relocating the current WIM system on MT 16 (north). The precise location and equipment used at each WIM site would be determined based on general requirements of the WIM system. By installing new WIM systems on these two roadways entering Culbertson, not all truck traffic would need to proceed to the weigh scale before proceeding onto their destinations. This would potentially diversify the paths of trucks. Even with the installation of WIM systems, the necessity of other spot improvements would not likely change because truck traffic has no other means of diversion away from downtown. This improvement as a whole is considered mid-term, but could be broken into individual installations as funding becomes available.

Project Timeline: Mid-Term Implementation (2-5 years)

Estimated Cost: \$300,000 to \$400,000

Truck Traffic Improvement Options Summary

Because the Four Lane US 2, the 7th Street Couplet, and the 8th Street Couplet are all options which include four lanes on US 2, only one of these three options would need to be considered in the future. For this reason, the Weigh-in-Motion Systems improvement option should be considered no matter which selection is made regarding four lanes on US 2.

1.1.4 Access Points

The number and location of access points is an area of concern. In particular, the proximity of an access point to an intersection is an issue. Too many access points along the highway and access points that are located too close to an intersection create potentially unsafe conflict points. One of the objectives of the Study is to minimize impacts associated with access points and roadside parking, to the extent practicable.

Improvement Option Number 13: Access Management Plan

A comprehensive Access Management Plan should be completed along US 2 from approximately MP 644.2 to 645.5, along MT 16 (north) from MP 88.6 to 88.1), and along MT 16 (south) from MP 0 to 1.2. These sections of highway are categorized by multiple approaches, by continuous asphalt parking lots, and by numerous driveway turning movements. The combination of these three categories result is conflicting operations. A formal Access Management Plan would allow for one-on-one dialogue with each property owner to devise a strategy to combine drive accesses, restrict problematic accesses, and/or to totally remove unneeded accesses. Implementing access control would require action by the Transportation Commission. Here, the potential also exists to install curb and gutter to restrict future access points along these roadways. The success of a formal Access Management Plan depends on aggressive outreach to all affected parties, plus a basic strategy on why access control will benefit both the adjacent land uses as well as the traveling public. Not only because of the high level of outreach but also because of the cost associated with completing an Access Management Plan, this improvement option has been classified as follows:

Project Timeline: Mid-Term Implementation (2-5 years)

Estimated Cost: \$130,000 to \$160,000

1.1.5 Community Area of Concern

During the first public information meeting, locals noted that besides the areas of concern noted above and in the Existing and Projected Conditions report, there is one other issue that they would like to see resolved.

Improvement Option Number 14: US 2 Speed Study

During the first public informational meeting, community members pointed out that the crosswalk located along US 2, adjacent to the Culbertson Public Schools, is dangerous because of the combination of four things: the proximity of the 25 mph sign, the difficulty finding the speed limit sign, the

percentage of trucks using US 2, and the hill west of the 25 mph sign. With a combination of these factors, community members observed that many vehicles, especially large trucks, are going faster than the posted 25 mph speed limit and possibly too fast for the crosswalk. One objective for this study is to improve pedestrian crossing safety near the school.

For these reasons, the Town of Culbertson should request a speed study. This speed study would evaluate and determine proper speed limits within the community and would potentially address the Study objective to improve pedestrian crossing safety near the school. It is also recommended that enforcement be increased near speed zone changes. Due to the low cost, this option is considered as follows:

Project Timeline: Short-Term Implementation (0-2 years)

Estimated Cost: \$40,000 to \$50,000

1.2 ***Improvement Options Considered But Not Advanced***

The following improvement options were developed and investigated and were ultimately not advanced into recommended improvement options.

1.2.1 **Traffic Signal or Roundabout at MT 16(north) / US 2 Intersection**

Recommendation of any type of traffic control must first undergo a study and documentation verifying a need before it can be proposed. Once traffic control is defined as a need, it must undergo signal warrant analysis. Any time a new signal is considered, state law requires the consideration of a roundabout.

At this time the four legs of the intersection at MT 16 (north) and US 2 operate at a level of service A or B and do not warrant traffic control. If a traffic control measure is warranted in the future, a signal warrant analysis and/or roundabout analysis would take place at that time.

1.2.2 **Install Left Turn Lane on MT 16(north)**

The option to install a left turn lane on MT 16 (north) in accordance with current MDT standards was considered. A dedicated left turn lane would allow trucks to turn left towards the weigh station and still allow vehicles to go straight or turn right at the intersection. At this time the four legs of the intersection at MT 16 (north) and US 2 operate at a level of service A or B. Analysis of projected traffic volumes determined that the four legs of this intersection would continue to operate at level of service A or B in the year 2032. Because there are no current or projected capacity issues at this intersection, this improvement is not advanced.

1.2.3 **Install Turn Lanes on US 2**

The option to install a left turn lane on the US 2 EB lane and a right turn lane to the US 2 WB lane was considered. Although the inclusion of WB right-turn lane would be ideal, adjacent buildings would hinder this addition. The intersection geometrics to incorporate these two turning lanes within the

constrained corridor would be complicated combined with the lack of current and future capacity issues led to the elimination of this improvement option from further consideration.

1.2.4 Convert Old Weigh Scale Area to Parking Lot

Although converting the old weigh scale area to a parking lot would decrease the need for on-street parking, it would result in more pedestrian crossing needed to access businesses to the east and south of this area. Even with parking moved off the street, there would still be potential for sight-distance issues with a new parking lot. This improvement option would not address any area of concern and is therefore not advanced.


1.2.5 3rd Avenue East Truck Route Designation

In the past, 3rd Avenue East was designated as a "truck route" and the Town of Culbertson maintained the facility. This route provided a direct north-south connector for trucks to pass through Culbertson without requiring sharp turns and passing through the downtown area of Culbertson, which is the current situation along Broadway Avenue. Recently, signs were placed along 3rd Avenue East stating "No Trucks over 20,000 GVW" were allowed along this road segment. This action required all trucks to remain on Broadway Avenue/MT 16, creating a longer and more difficult route through the downtown area of Culbertson.

To address these issues with trucks on Broadway and associated geometric concerns, re-designation of 3rd Avenue East as the truck route was considered. If funding and maintenance responsibility were the barrier to this recommendation, the City of Culbertson could consider working with MDT, through their formal process, to try and designate 3rd Avenue East instead of Broadway as MT 16 through Culbertson if it is eligible. This improvement option was not considered due to the recent petition by Culbertson community members to eliminate the 3rd Avenue East truck route designation.

Appendix A
Improvement Option Forms

Improvement Number 1: Urban Amenities on MT 16 and US 2	
Road 1:	MT 16
Road 2:	US 2
County:	Roosevelt
Length (Miles):	2.2
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Mid-Term
Cost (construction only):	\$1,000,000 to \$1,200,000

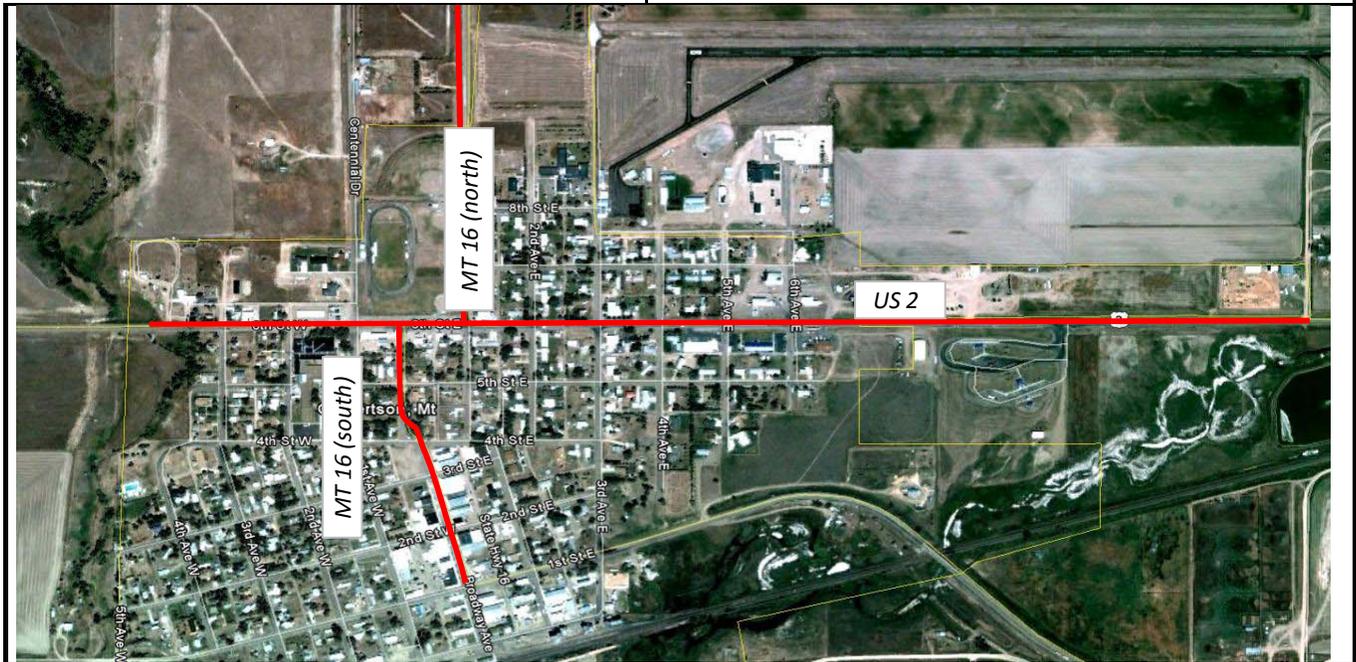

Problem Description

There is currently limited pedestrian travel interconnectivity throughout both the Town and surrounding areas. This limited interconnectivity discourages pedestrian travel or requires pedestrian use of the roadway in several portions of the Study area. One objective for this study is to enhance pedestrian movements along US 2 and MT 16, to the extent practicable. Another objective for this study is to minimize impacts associated with access points and roadside parking, to the extent practicable.

Proposed Improvement Solution

Update typical section to include urban amenities (curb and gutter and sidewalks). This would take place within the incorporated city limits (i.e., approximately MP 644.2 to 645.5 along US 2, MP 88.6 to 88.1 along MT 16 (north), and MP 0 to the Broadway Avenue/1st Street West intersection along MT 16 (south)). Sidewalks would be implemented on US 2 where they do not currently exist to enhance pedestrian movements. Depending on the right-of-way limits on each side of the current roadway, addition of sidewalks would have the potential to impact adjacent land owners. Curb and gutter would be implemented along both sides of US 2 to address surface water flow, delineate current access points, and provide access control for future businesses that may develop within the incorporated city limits. The addition of curb and gutter would have minimal impact on landowners if curb and gutter was implemented only where current accesses do not exist. This improvement as a whole is considered mid-term, but could be broken into smaller, short-term improvement options as funding becomes available. The cost of this improvement option includes curb and gutter and five-foot sidewalks along both sides of MT 16 (north) and along US 2. It was assumed that curb and gutter already exists along MT 16 (south). Five-foot sidewalks were also included as part of the cost estimate along both sides of MT 16 (south) from the intersection of MT 16 (south) and US 2 to 3rd Street.

Improvement Number 2: Rectangular Rapid Flashing Beacon (RRFB)	
Road 1:	MT 16
Road 2:	US 2
County:	Roosevelt
Length (Miles):	2.5
Route Description	
Lanes:	
	Road 1: 2
	Road 2: 2
Phase:	Short-term
Cost (construction only):	\$5,000 to \$10,000



Problem Description

One crosswalk is located on US 2 between the Culbertson Public Schools and the adjacent convenient store, currently called Val-Am Stop & Go. This crosswalk is located mid-block and is primarily used by school-aged children to access the convenient store and also to access the Culbertson Schools Recreation Complex. With the percentage of trucks traversing the corridor and the speed limit change so close to this crosswalk location, this has the potential to be a safety concern. One objective for this study is to improve pedestrian crossing safety near the school.

Proposed Improvement Solution

Because a signed and striped crosswalk currently exists along US 2 between 1st Avenue West and 2nd Avenue West, this improvement option calls for the enhancement of the crosswalk through the installation of a highly visible Rectangular Rapid Flashing Beacon (RRFB).

Improvement Number 3: Non-Motorized Transportation Plan	
Road 1:	MT 16
Road 2:	US 2
County:	Roosevelt
Length (Miles):	2.5
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Short-term
Cost (construction only):	\$50,000 to \$60,000



Problem Description

There is currently no signed or striped crosswalk to allow children or other pedestrians within the northeast quadrant of Culbertson, located north of US 2 and east of MT 16 north, to access the school. One crosswalk is located on US 2 between the Culbertson Public Schools and the adjacent convenient store to the north, currently called Val-Am Stop & Go. A second crosswalk is located on 5th Street and crosses Broadway Avenue. One objective for this study is to improve pedestrian crossing safety near the school. Another objective for this study is to enhance pedestrian movements along US 2 and MT 16, to the extent practicable.

Proposed Improvement Solution

It is recommended that the City or County completes a non-motorized transportation plan in order to identify potential bicycle and pedestrian needs and potential mitigation measures to address these needs, not only for school-aged children, but for all pedestrians traversing the Study area. This plan would encompass the area within the incorporated city limits (i.e., approximately MP 644.2 to 645.5 along US 2, MP 88.6 to 88.1 along MT 16 (north), and MP 0 to 1.2 along MT 16 (south)). Due to the lack of construction coupled with the low cost to complete this study, this option has been classified as short-term. The cost estimate developed for this improvement option is for the completion of a Non-Motorized Transportation Plan.

Improvement Option 4: Bulb-Out	
Road 1:	MT 16 (south)
Road 2:	2nd Street
County:	Roosevelt
Length (Miles):	Intersection
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Short-term
Cost (construction only):	\$10,000 to \$12,000



Problem Description

During the first public informational meeting, local residents noted that the intersection of MT 16 (south) and 2nd Street is dangerous due to the sight distance related to the proximity of business parking to the intersection and the number of pedestrians that want to travel between businesses on both sides of MT 16 (south). Currently, no signed or striped crosswalk exists between downtown businesses located along both sides of MT 16 (south). With the percentage of trucks traversing the corridor, this has the potential to be a safety concern. One objective for this study is to enhance pedestrian movements along US 2 and MT 16, to the extent practicable. Another objective is to improve intersection site distance, to the extent practicable.

Proposed Improvement Solution

Design and implementation should be considered to heighten pedestrian visibility at this intersection. Curb bulb-outs or other infrastructure would increase awareness to pedestrians. The bulb-out improvement should be done with sensitivity to drainage considerations, snow plowing operations, and local truck and vehicle turning movements. Shifting street parking away from the intersection would also heighten pedestrian visibility and assist the sight distance issue. There are currently multiple businesses along Broadway Avenue/MT 16 and off this main thoroughfare that require trucks or other large vehicles to turn onto local roadways. For those businesses located along Broadway Avenue/MT 16, most use adjacent streets or alleyways to park and then walk the freight to the respective businesses. Because school bus parking and the Farm Equipment Sales Incorporated business are both located to the west of the intersection, more trucks and large vehicles are using 2nd Street west of Broadway Avenue. To avoid potential conflicts with trucks turning between Broadway Avenue and 2nd Street west of Broadway Avenue, a curb bulb-out is only recommended on the east side of Broadway Avenue parallel to 2nd Street. To improve sight distance on the west side of the intersection, parking restrictions could also be considered.

Improvement Number 5: Geometric Upgrade of MT 16 (north) / US 2 Intersection	
Road 1:	MT 16 (north)
Road 2:	US 2
County:	Roosevelt
Length (Miles):	Intersection
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Improvement:	
Phase:	Mid-term
Cost (construction only):	\$300,000 to \$400,000



Problem Description
 The intersection of US 2 and MT 16 (north) in Culbertson is a concern due to substandard geometrics. One objective for this study is to improve geometric elements to provide for semi-trucks and recreational vehicles.

Proposed Improvement Solution
 Upgrade the intersection to meet current MDT design standards to accommodate the WB-67 design vehicle. By bringing the intersection up to current MDT design standards, the objective to improve geometric elements to provide for semi-trucks would be met. Due to the need for design in upgrading an intersection along with the need to purchase right-of-way, and the overall cost of construction, this option has been classified as mid-term. The cost of this improvement option includes curb and gutter, five-foot sidewalks, asphalt, subgrade, and excavation on all four legs of the intersection.

Improvement Number 6: Upgrade MT 16 (south) / US 2 Intersection

Road 1:	MT 16 (south)
Road 2:	US 2
County:	Roosevelt
Length (Miles):	Intersection
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Mid-term
Cost (construction only):	\$200,000 to \$300,000




Problem Description

The geometric layout of the intersection is not sufficient for proper turning movements of large trucks going through the intersection as trucks occupy two lanes in order to make the turn. With increased amounts of traffic, especially large trucks, deterioration of the existing roadway pavement is a concern. Large trucks with dual axle configurations pose the biggest threat to the pavement. Also, particular attention should be given to the roadway shoulders. As trucks have to pull over to the side of the road, or as rear wheels “track” onto the shoulder going through a right turn, the existing pavement can be damaged considerably. Broken up pavement, substantial cracks, and potholes reduce the service life of the roadway and pose a safety risk to the traveling public.

Proposed Improvement Solution

Upgrade the intersection to meet current MDT design standards to accommodate the WB-67 design vehicle. This upgrade would include improvements to the pavement section of the MT 16 (south) by adding a concrete element or other means. Improving the pavement section may be implemented with the existing Broadway Avenue rehabilitation project [NH 62-1(10)0 MT 16-Culbertson] that the MDT Glendive District is currently working on. In order to upgrade the intersection, additional right-of-way would be required on either side. The Oelkers Carter Service Center located in the southeast quadrant of the intersection is a potential 4(f) property which may require additional environmental consideration under this improvement option. Due to the need for design in upgrading an intersection along with the need to purchase right-of-way, and the overall cost of construction, this option has been classified as mid-term. The cost of this improvement option includes curb and gutter, five-foot sidewalks, asphalt, subgrade, and excavation on all three legs of the intersection. A small amount of concrete was also included in the overall cost.

Improvement Number 7: MT 16 (North) Realignment	
Road 1:	MT 16 (North)
Road 2:	-
County:	Roosevelt
Length (Miles):	0.2
Route Description	
Lanes:	
Road 1:	2
Road 2:	-
Phase:	Long-term
Cost (construction only):	\$500,000 to \$600,000

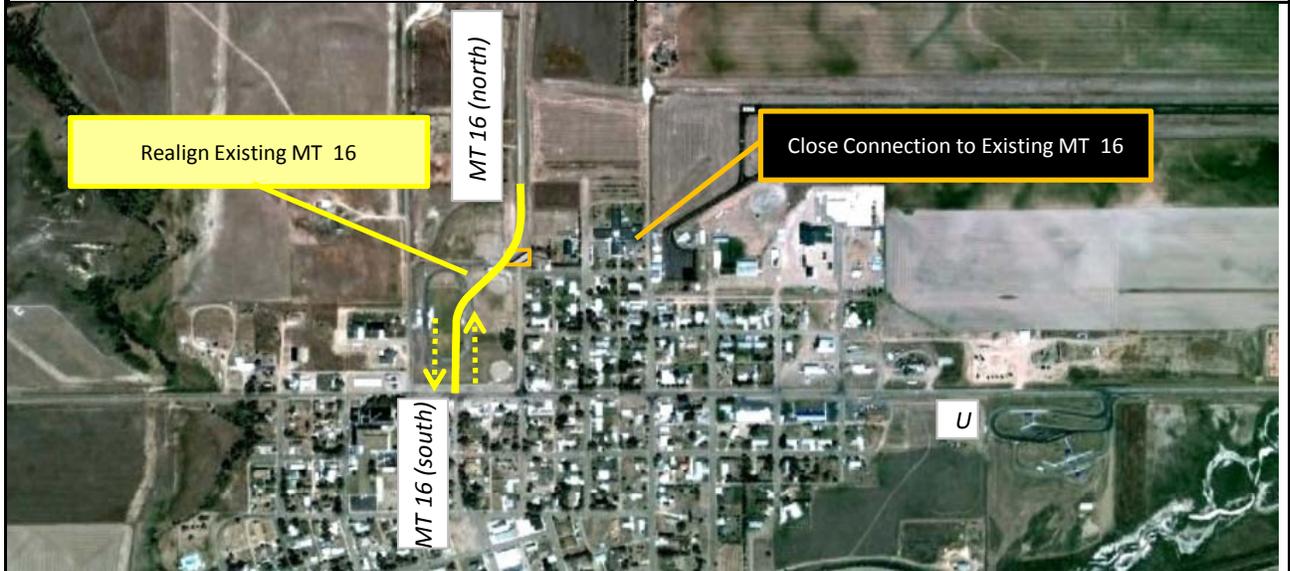

Problem Description

When considered together, the geometric layout of the intersections of MT 16 with US 2 is not sufficient for proper turning movements of large trucks. The two sequential 90-degree turns on the two lane facilities located within one block of each other has the potential to cause congestion and safety issues for not only heavy vehicles, but for other vehicles behind them. Although there are no current or projected capacity issues at either intersection of MT 16 with US 2, this option has the potential to address the need to improve operations of US 2 and MT 16.

Proposed Improvement Solution

This improvement option considers realigning the existing MT 16 (north) roadway to line up with MT 16 (south). In order to implement this option, right-of-way would need to be purchased along the new route's entirety. Due to the impacts to the recreational fields, this entire facility would need to be relocated. If this improvement option was implemented, it would be designed to meet current MDT design standards to accommodate the WB-67 design vehicle. Although the intersection of MT 16 (north) and 8th Street would remain open for emergency services accessibility, the small portion of MT 16 (north) located north of 8th Street would be removed.

Improvement Number 8: Sight Distance Improvements at Project Intersections	
Road 1:	MT 16
Road 2:	US 2
County:	Roosevelt
Length (Miles):	Intersections
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Improvement:	
Phase:	Short-term
Cost (construction only):	\$20,000 to \$25000



Problem Description

The sight distance for vehicles trying to enter or exit the roadway at intersections along US 2 and MT 16 through Culbertson is a concern. Hindered sight triangles with the increased traffic on these roads pose a safety risk for the vehicles on the highway and those trying to enter/exit the highway. Several sight obstructions including buildings, signs, vegetation, and parked/turning vehicles exist within quadrants at various intersections in Culbertson. One objective for this study is to improve sight distance, to the extent practicable.

Proposed Improvement Solution

In order to improve sight distance throughout the Study area, signs located in sight distance triangles at all quadrants of an intersection should be removed and/or relocated, to the extent practicable. This includes the intersections of MT 16 (north) / US 2, MT 16 (south) / US 2, Broadway Avenue / 4th Street, and Broadway Avenue / 1st Street. On-street parking near these intersections should also be eliminated, to the extent practicable. MDT has very limited power of enforcement regarding signs outside highway right-of-way and parking restrictions. It would be more appropriate for Culbertson to pass an ordinance regarding sight distance and/or parking restrictions if the community considers this improvement option necessary. Due to the low cost and increased involvement required on the part of the Town of Culbertson, this option has been classified as short-term. The cost of this improvement option includes the cost of moving 18 signs and removing 3 large trees.

Improvement Number 9: Four-Lane US 2	
Road 1:	US 2
Road 2:	-
County:	Roosevelt
Length (Miles):	4.0
Route Description	
Lanes:	
Road 1:	4
Road 2:	-
Phase:	Long-term
Cost (prorated from EA):	
	\$16,500,000 to \$20,000,000



Problem Description

Although there are no current capacity issues along US 2, the increase in traffic volumes associated with the recent boom in the oil and gas industry may result in capacity issues in the future. The *Culbertson-East to North Dakota EA* identified a proposed action to incorporate a four-lane facility along US 2. The Culbertson EA noted that the four-lane facility would provide benefits related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design. The four-lane typical section for US 2 serves as a long-term solution that is consistent with local planning efforts including the Culbertson EA and Town of Culbertson's 2011 Growth Policy.

Proposed Improvement Solution

According to the Culbertson EA, the Town of Culbertson's preferred typical section from MT 16 (north) to the eastern incorporated city limits would be composed of two five-foot sidewalks, curb and gutter on both sides of the roadway, two five-foot shoulders, two 12-foot outside travel lanes, and two 11-foot inside travel lanes. There would be no on-street parking. As the roadway leaves Culbertson, the curb and gutter and sidewalks would be terminated but the roadway would remain a four-lane undivided section with eight-foot shoulders and four 12-foot travel lanes. This configuration would extend to a point west of the Clover Creek bridge where it would transition to a divided four-lane section. In order for consistency, it is recommended US 2 to the west of MT 16 (north) would continue the four-lane configuration with sidewalks to the western edge of incorporated city limits. As US 2 reached the west end of Culbertson, the typical section would transition to an undivided four-lane with eight-foot shoulders until it reached the study area boundary. The cost estimate was obtained from the Culbertson EA and Finding of No Significant Impact (2008 dollars) which takes preliminary right-of-way and construction costs into consideration.

Improvement Number 10: 7th Street Couplet	
Road 1:	US 2
Road 2:	7th Street
County:	Roosevelt
Length (Miles):	2.1
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Long-term
Cost (construction only):	\$3,200,000 to
	\$3,800,000



Problem Description

Although there are no current or projected capacity issues along US 2, the increase in traffic volumes associated with the recent boom in the oil and gas industry may result in functional issues in the future. The Culbertson-East to North Dakota EA identified a proposed action to incorporate a four-lane facility along US 2. The Culbertson EA noted that the four-lane facility would provide benefits related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design. Although a couplet was not addressed in the Culbertson EA, it could be a design option that would allow for consistency and continuity of a four-lane facility.

Proposed Improvement Solution

As a re-evaluation of the US 2 four-lane facility included in the Culbertson EA, a couplet along 7th Street was explored. This option consists of a couplet utilizing the existing US 2 for the eastbound direction and 7th Street and portions of developed land for the westbound direction. The west end of 7th Street would bisect a residential area and tie into US 2 near Diamond Creek. The east end of 7th Street would bisect a residential/industrial area and tie into US 2 near the weigh scale. The recreational fields would be impacted and would need to be relocated. The cost estimate takes into account urban amenity improvements along US 2 (1.0 miles) and new urban roadway/improvements to the existing 7th Street (1.1 miles).

Improvement Number 11: 8th Street Couplet	
Road 1:	US 2
Road 2:	8th Street
County:	Roosevelt
Length (Miles):	2.2
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Long-term
Cost (construction only):	\$3,200,000 to \$3,800,000





Problem Description

Although there are no current or projected capacity issues along US 2, the increase in traffic volumes associated with the recent boom in the oil and gas industry may result in functional issues in the future. The Culbertson-East to North Dakota EA identified a proposed action to incorporate a four-lane facility along US 2. The Culbertson EA noted that the four-lane facility would provide benefits related to improved level of service, improved safety, support for anticipated economic growth, and updated roadway design. Although a couplet was not addressed in the Culbertson EA, it would be a design option that would allow for consistency and continuity of a four-lane facility.

Proposed Improvement Solution

As a re-evaluation of the four-lane facility along US 2 included in the Culbertson EA, a couplet along 8th Street was explored to minimize impacts to the recreational fields. This option consists of a couplet utilizing the existing US 2 for the eastbound direction and 8th Street and portions of developed land for the westbound direction. The west end of 8th Street would minimize impacts to the recreational fields and residential area to the extent practicable before intersecting US 2 near Diamond Creek. The east end of 8th Street would bisect a residential/industrial area and tie into US 2 near the weigh scale. This option would minimize impacts to the recreational fields and the airport to the extent practicable; however, more curves in the alignment would be required. The cost estimate takes into account urban amenity improvements along US 2 (1.0 miles) and urban rehabilitation and new urban roadway along 8th Street (1.2 miles).

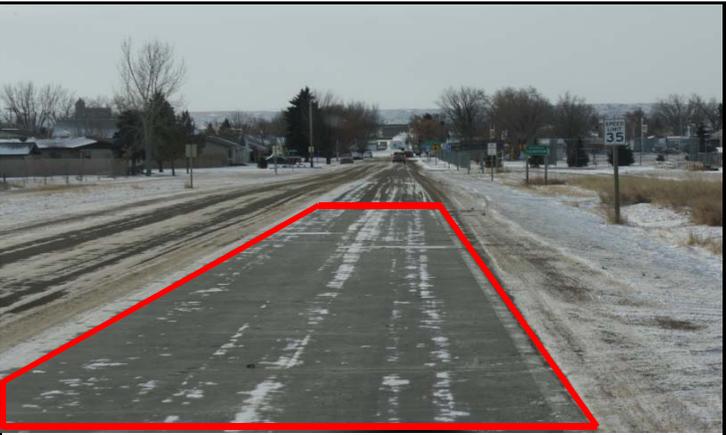Improvement Number 12: Weigh-In-Motion Systems		
Road 1:	MT 16	
Road 2:	US 2	
County:	Roosevelt	
Length (Miles):	WIM Sites	
Route Description		
Lanes:		
	Road 1:	2
	Road 2:	2
Phase:	Mid-Term	
Cost (construction only):	\$300,000 to \$400,000	

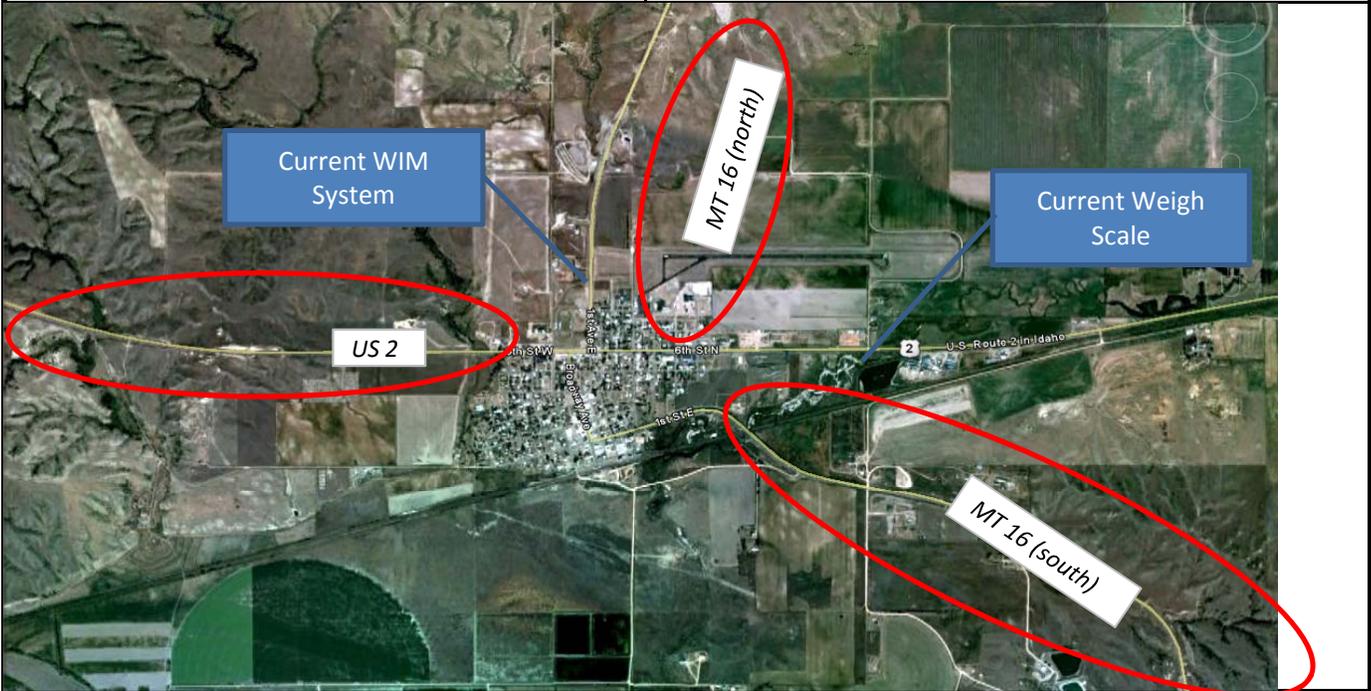

Problem Description
The town of Culbertson has experienced a considerable increase in truck traffic through town due to the increased growth of the oil and gas industry in and around the study area. All trucks entering the Study area from the east, west, and south and some trucks entering from the north must first proceed to the weigh scale, which means some trucks make two passes through Culbertson before they can proceed to their destination.

Proposed Improvement Solution
Install WIM systems on US 2 west of Culbertson and MT 16 (south). The current WIM system on MT 16 (north) may need to be moved further north. The precise location and equipment used at each WIM site would be determined based on requirements of the WIM system. By installing new WIM systems on these two roadways entering Culbertson, not all truck traffic would need to proceed to the weigh scale before proceeding onto their destinations. This would potentially diversify the paths of trucks. Even with the installation of WIM systems, the necessity of other spot improvements would not likely change because truck traffic has no other means of diversion away from downtown. This improvement as a whole is considered mid-term, but could be broken into individual installations as funding becomes available.

Improvement Number 13: Access Management Plan

Road 1:	MT 16
Road 2:	US 2
County:	Roosevelt
Length (Miles):	2.5
Route Description	
Lanes:	
Road 1:	2
Road 2:	2
Phase:	Mid-Term
Cost (construction only):	\$130,000 to \$160,000



Problem Description

The number of access points and their location are a concern. In particular, the proximity of an access point to an intersection is an issue. Too many access points along the highway and access points that are located too close to an intersection create potentially unsafe conflict points. One of the objectives of the Study is to minimize impacts associated with access points and roadside parking, to the extent practicable.

Proposed Improvement Solution

A comprehensive Access Management Plan should be completed along US 2 from approximately MP 644.2 to 645.5, along MT 16 (north) from MP 88.6 to 88.1), and along MT 16 (south) from MP 0 to 1.2. These sections of highway are categorized by multiple approaches, by continuous asphalt parking lots, and by numerous driveway turning movements. The combination of these three categories result is conflicting operations. A formal Access Management Plan would allow for one-on-one dialogue with each property owner to devise a strategy to combine drive accesses, restrict problematic accesses, and/or to totally remove unneeded accesses. Implementing access control would require action by the Transportation Commission. Here, the potential also exists to install curb and gutter to restrict future access points along these roadways. The success of a formal Access Management Plan depends on aggressive outreach to all affected parties, plus a basic strategy on why access control will benefit both the adjacent land uses as well as the traveling public. Not only because of the high level of outreach but also because of the cost associated with completing an Access Management Plan, this improvement option has been classified as a mid-term project: . This cost estimate is for the completion of the Access Management Plan.

Improvement Option 14: US 2 Speed Study	
Road 1:	US 2
Road 2:	-
County:	Roosevelt
Length (Miles):	Sign Location
Route Description	
Lanes:	
	Road 1: 2
	Road 2: -
Phase:	Short-term
Cost (construction only):	\$40,000 to \$50,000



Problem Description
 During the first public informational meeting, locals noted that the proximity of the 25 mph sign to the US 2 crosswalk has the potential to be dangerous. With the percentage of trucks traversing the US 2 corridor coupled with the hill to the west of the speed limit change, locals observed that many vehicles, especially trucks, are not going 25mph at the posted speed limit and possibly not in time for the crosswalk either. One objective for this study is to improve pedestrian crossing safety near the school.

Proposed Improvement Solution
 It is recommended that the Town of Culbertson requests a speed study. The speed study would evaluate and determine proper speed limits within the community. It is also recommend to increase enforcement near speed zone changes. Due to the low cost of this improvement option, it is considered short-term. This cost estimate is for the completion of a Speed Study.

Culbertson Corridor Planning Study

ALTERNATE ROUTES REPORT

June 2012

Prepared for:

Montana Department of Transportation



Prepared by:

CDM Smith

Helena, Montana



Table of Contents

Chapter 1	Alternate Truck Route Identification	1
1.1	Proposed Truck Route Regions	1
1.1.1	Western Truck Route Area	3
1.1.2	Eastern Truck Route Area	4
Chapter 2	Screening of Proposed Truck Route Regions	4
2.1	First Level Screening Criteria	4
2.1.1	Accessibility to Weigh Scale	5
2.1.2	Truck Traffic Patterns	5
2.2	First Level Screening Results	7
Chapter 3	Alternate Truck Route Identification	8
3.1	Alternate Route #1	10
3.2	Alternate Route #2	10
3.3	Alternate Route #3	10
3.4	Alternate Route #4	11
3.5	Alternate Route #5	11
3.6	Alternate Route #6	12
3.7	New SE County Road	12
3.8	Necessity of Improvement Options with Implementation of Alternate Route	13
Chapter 4	Second Level Screening	15
4.1	Travel Time	15
4.2	Impacts	18
4.3	Construction Cost Comparison	21
4.4	Recommendation for Alternate Routes to Carry Forward	21

List of Tables

Table 1. First Level Rating Factors.....	5
Table 2. First Level Screening Results	7
Table 3. Improvement Options Still Necessary with Implementation of Alternate Route.....	14
Table 4. Calculated Approach Delays.....	17
Table 5. Travel Time Rating.....	18
Table 6. Impacts Rating	20
Table 7. Construction Cost Comparison Rating	21
Table 8. Second Screening Summary	22

List of Figures

Figure 1. Truck Route Regions.....	2
Figure 2. 24-hour Truck Traffic Patterns	6
Figure 3. Alternate Route Overview Map	9
Figure 4. Approaches with Delays.....	16

Appendix A: Cost Estimating Spreadsheet

Chapter 1 **Alternate Truck Route Identification**

The purpose of this Technical Memorandum is to provide an account of the methodology and analysis used to develop and refine proposed truck route regions and the identification of a preliminary preferred alternate route. Truck route regions were developed by taking a high-level examination of current truck traffic patterns through Culbertson and addressing the needs and objectives set up for this Study.

One key issue driving this whole process is the requirement that all large trucks on US 2 either eastbound or westbound are required to first proceed to the weigh scale. Large trucks on US 2 that are ultimately heading northbound or southbound on MT 16 are also required to stop first at the weigh scale. In other words, all large trucks entering the Study area either from the east or west are required to first check in at the weigh scale before proceeding to their destination. Additionally, all large trucks northbound on MT 16 (from Sidney or Richland County) must first proceed to the weigh scale. Southbound trucks approaching Culbertson from MT 16 (north) use a Weigh-In-Motion (WIM) System and a Variable message sign directs them to the weigh station if the WIM detects a violation of speed, axle weight, gross vehicle weight, or bridge weight. The WIM site detects a violation of approximately 15 percent of the southbound trucks on MT 16 and directs them to the weigh scale, regardless of their destination.

1.1 ***Proposed Truck Route Regions***

In order to address the Town of Culbertson's concern regarding truck traffic traveling on Broadway Avenue and truck turning movements at the intersections of MT 16 with US 2, general regions on the east and west sides of Culbertson were developed. Regions on the east and west sides of Culbertson would eliminate the right-angle turning movements at the intersections of MT 16 to US 2. Regions north and south of US 2 were not developed because even if a region north or south of US 2 were available, trucks would not likely take a route that is longer than the current direct link through town along US 2. Figure 1 shows the two truck route regions developed for this Study.

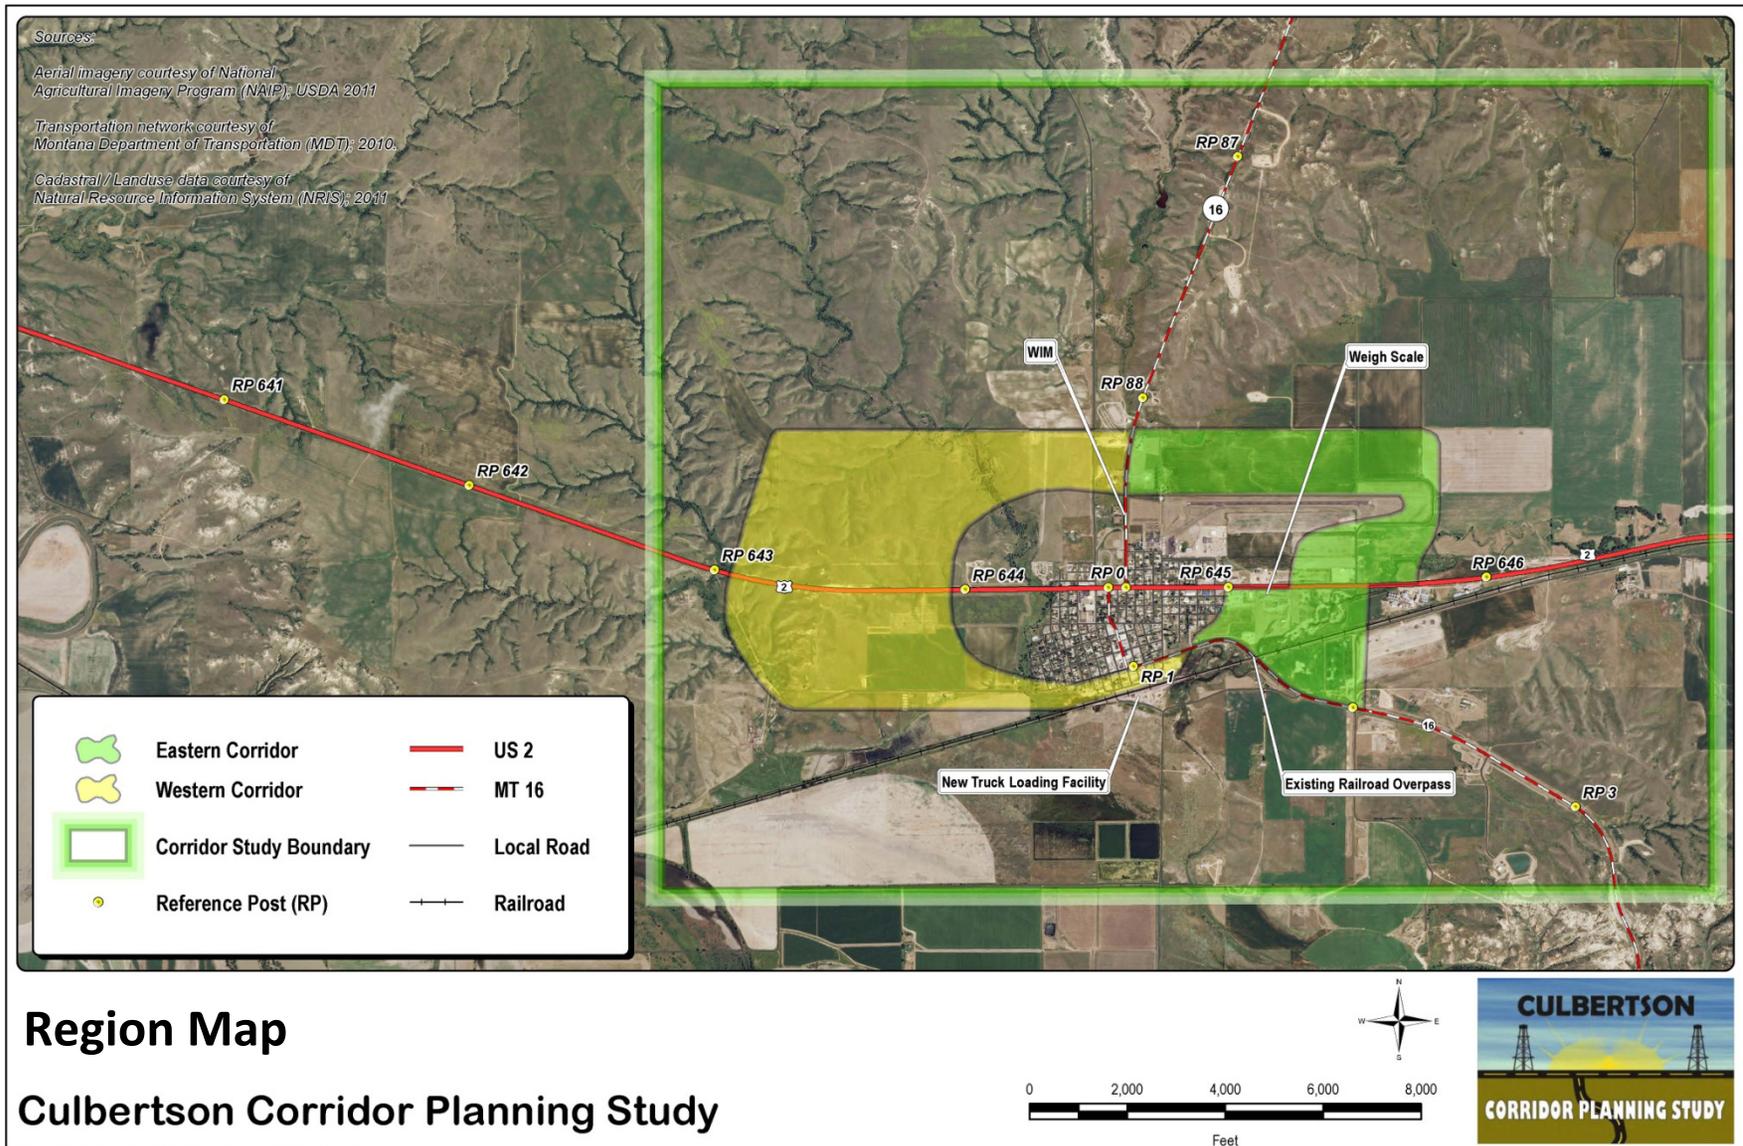


Figure 1. Truck Route Regions

1.1.1 Western Truck Route Area

The western truck route region contains the area west of MT 16 both north and south of US 2 and is located north of the BNSF railway. Major constraints in this region include the large elevation changes on the western most side of the Study area, the Hillside Cemetery, and the numerous residential and industrial areas within the Culbertson incorporated city limits. Diamond Creek travels through this region and a crossing of this creek would not be avoided. This region would not provide direct access to the weigh scale, and all trucks entering the Study area from the west and south would need to first proceed to the weigh scale before continuing on to their destination. Without implementation of additional traffic diversion features, a western truck route would not reduce truck traffic on Broadway Avenue or through Culbertson.

The only way to alleviate truck traffic through Culbertson would be to implement a WIM system on the various legs of MT 16 and US 2. The following paragraphs describe how implementation of a WIM system on a particular leg may or may not alleviate truck traffic through Culbertson.

WIM System on MT 16 (North)

Although there is currently a WIM system on MT 16 (north), the current location of the WIM system is located south of any western region connection with MT 16 (north) and therefore would not be effective in drawing traffic onto a western truck route. If the WIM system were moved north of its current location, the success of a western truck route region to draw traffic from Broadway Avenue and through Culbertson depends on the amount of traffic currently using MT 16 (north) that is heading west. A WIM system combined with a western route may be effective in alleviating southbound truck traffic, but with the added distance for trucks to travel around Culbertson, it is not clear whether the southbound trucks would take a western route or proceed through Culbertson.

WIM System on US 2 West of Culbertson

If a WIM system were added west of a western truck route connection on US 2, it could be successful in alleviating the volume of southbound and northbound trucks through town. Truck traffic traveling eastbound from US 2 would continue to travel the shortest route, which is US 2 straight through Culbertson.

WIM System on MT 16 (South)

If a WIM system were added to MT 16 south of a western truck route connection, it could be successful in alleviating westbound truck traffic through town. A WIM system combined with a western route may be effective in alleviating northbound truck traffic, but with the added distance for trucks to travel around Culbertson, it is not clear whether the northbound trucks would take a western route or proceed through Culbertson. Eastbound trucks would continue to traverse Broadway Avenue through Culbertson before proceeding east on US 2.

Western Truck Route Region Summary

Even if WIM systems were implemented on US 2 west of Culbertson, on MT 16 South of Culbertson, and the existing WIM system on MT 16 (north) was moved north of its current location, at least 15 percent

of truck traffic would still travel through town to head to the weigh scale. In addition, it is unclear whether trucks would utilize a western route due to the potential of an increase in truck travel distance.

1.1.2 Eastern Truck Route Area

The eastern region contains the area east of MT 16 both north and south of US 2 and contains the area north of MT 16 (south). Major constraints in this region include the Big Sky Field airport, BNSF Railway, Clover Creek, and numerous residential and industrial areas. A north and south connection in this region would provide direct access to the weigh scale, which the majority of trucks need to proceed to before going to their destination and would address the issues with the increasing volumes of trucks through Culbertson as well as the issues with the turning movements of large trucks at the intersections of US 2 and MT 16 North and South. A truck route in this area would not require additional traffic diversion features due to the location of the weigh scale. To make an eastern truck route more effective, abstaining from implementation of a WIM system would force trucks to use the truck route to reach the weigh scale instead of proceeding through Culbertson to their destination. This may increase the truck traffic on US 2 through Culbertson for westbound trucks; but implementation of an eastern truck route would alleviate truck traffic through Culbertson if their destination through Culbertson is south, east, or north of Culbertson.

Chapter 2 Screening of Proposed Truck Route Regions

Screening criteria were developed to assist in the evaluation of the two truck route regions in the Culbertson Corridor Study area and to provide a means of reducing the number of potential alternate truck routes for consideration by comparing them both quantitatively and qualitatively with a set of specific measures. The first level screening process described in this chapter illustrates each region's fulfillment of either meeting or not meeting Culbertson's ultimate goal to reduce truck traffic through Culbertson. The region that is best able to accomplish this goal will be moved forward for identification of individual alternate routes within the region. Figure 1 depicts the two general truck route regions under consideration.

2.1 First Level Screening Criteria

In order to evaluate which region is best able to meet Culbertson's goal of reduced truck traffic through Culbertson, screening criteria were developed. The first level of screening evaluates two truck route regions against the following criteria:

- Accessibility to Weigh Scale
- Truck Traffic Patterns

In order to determine whether a region met each screening criterion, rating factors were developed. "Yes" or "No" rating factors were assigned to each screening criterion for each region. Table 1 describes and shows the first level rating factors.

Table 1. First Level Rating Factors

YES	NO
Best Able to Meet Screening Criterion	Least Able to Meet Screening Criterion

A description of each screening criterion and a comparison of each truck route region to each screening criterion are described below. A matrix summary of the results of the first level screening is shown in Table 2.

2.1.1 Accessibility to Weigh Scale

Due to the requirement that trucks access the weigh scale before proceeding to their destination, the effectiveness of any truck route depends on its ability to reroute truck traffic away from Broadway Avenue before accessing the weigh scale. All trucks entering the Study area from the east, south, and west are required to check into the weigh scale before proceeding to their destination. Trucks approaching Culbertson from the north use a Weigh-In-Motion (WIM) System and a Variable message sign directs them to the weigh station if the WIM detects a violation of speed, axle weight, gross vehicle weight, or bridge weight. Approximately 15 percent of the southbound trucks on MT 16 are directed to the weigh scale, regardless of their destination through Culbertson. The effectiveness of a truck route region is a direct correlation to the location of the current weigh scale.

Accessibility to the weigh scale was measured in the following way:

<u>Rating Factor</u>	<u>Rating Factor Description</u>
Yes	Route reduces the volume of truck traffic through Culbertson and provides access to weigh scale without need for trucks traversing Culbertson's interior street network.
No	Route does not provide a reasonable alternative route to weigh scale thus not reducing truck traffic volume through Culbertson.


2.1.2 Truck Traffic Patterns

Truck traffic patterns would distinguish which region would help alleviate one of the Town of Culbertson's greatest concerns: truck traffic through Culbertson. Not only are there truck volume issues through Culbertson, but there are also a number of issues with trucks turning at both intersections of MT 16 with US 2. Truck turning issues include trucks using both lanes to make a turn, a delay in the ability to make the turn because of oncoming traffic and the truck drivers' need to use both lanes, and the increased queue of vehicles due to this delay. This screening criterion looks at which region has the highest potential to alleviate truck traffic volumes through Culbertson.

Turning movement counts were gathered at four locations within the Study area. Two of these turning movement counts were analyzed to gauge an overall picture of truck traffic patterns in the Study area.

The information in Figure 2 shows the highest volumes of trucks are entering / exiting US 2 east of MT 16 (north) and entering / exiting US 2 via MT 16 (South), essentially moving east and south.

Figure 2. 24-hour Truck Traffic Patterns

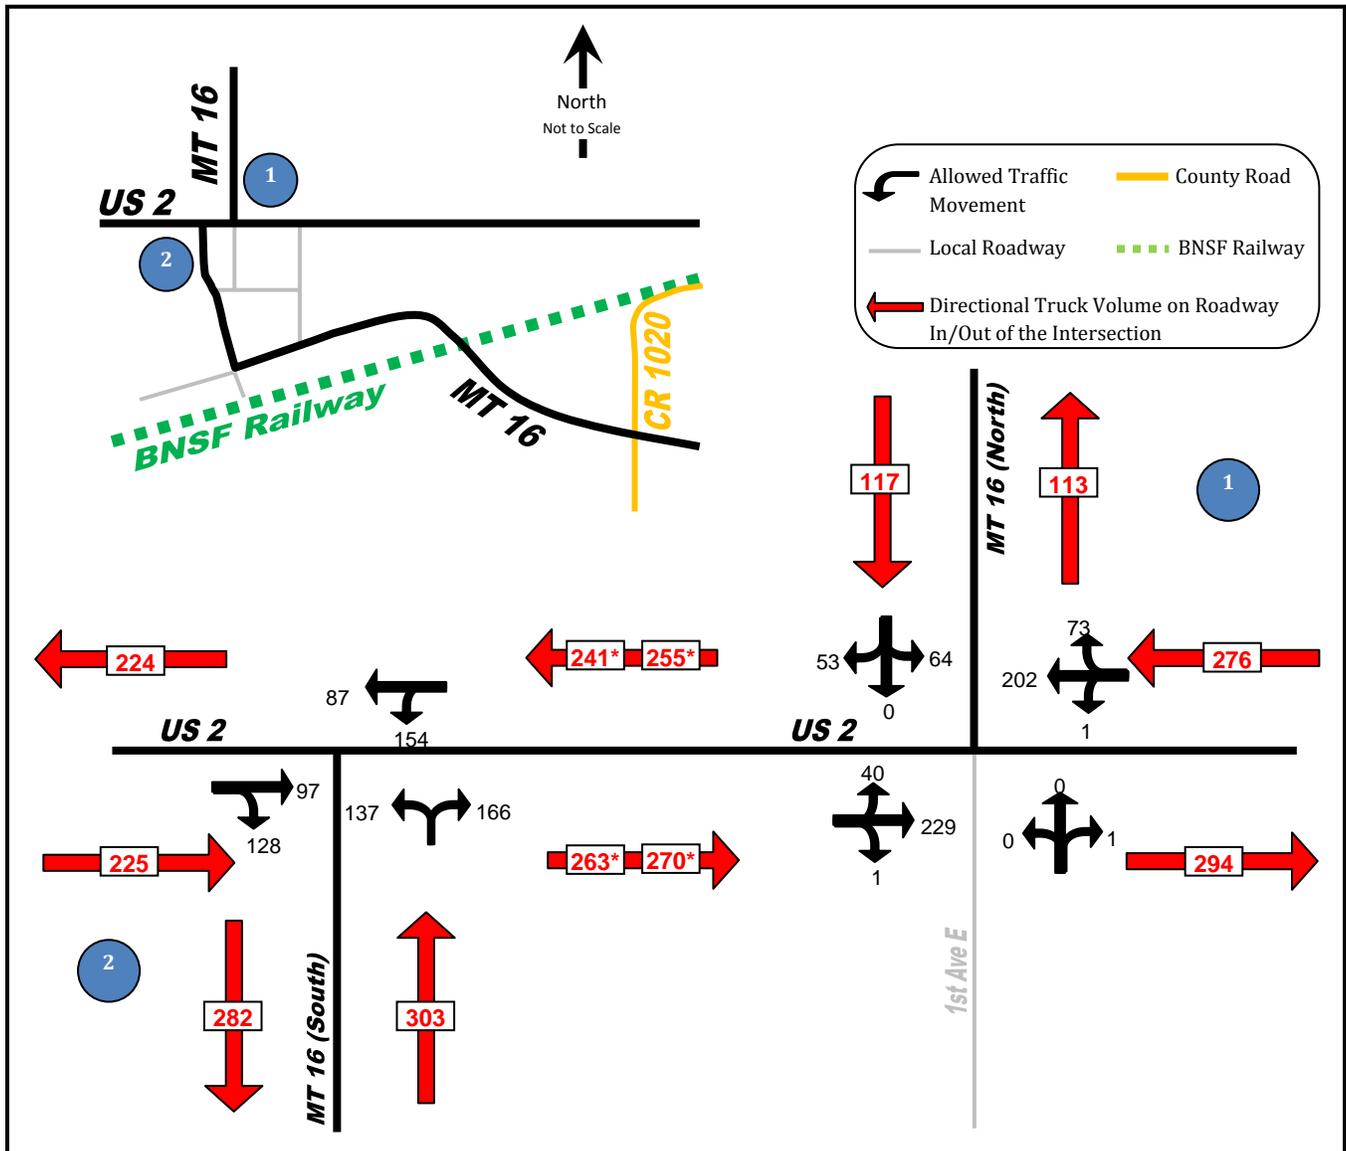

* Traffic counts were taken at different times for intersections 1 and 2 and therefore the combined volumes in and out of these intersections do not match.

Truck traffic patterns were measured in the following manner:

<u>Rating Factor</u>	<u>Rating Factor Description</u>
Yes	Has the highest potential to reduce both truck traffic through Culbertson and turning movements within Culbertson.
No	Has the lowest potential to reduce both truck traffic through Culbertson and turning movements within Culbertson.

In looking at the truck traffic patterns shown in Figure 2, it appears that either as a leg volume or individual turning movements, all truck volumes entering/exiting the east are higher than those entering/exiting the west. By adding the volumes associated with an eastern or western region route, this screening criterion can determine which route would better reduce truck traffic through and turning movements within Culbertson. The western region route has the potential to divert 53 trucks from the north-to-west turning movement, 40 trucks from the west-to-north turning movement, 128 trucks from the west-to-south turning movement, and 137 trucks from the south-to-west turning movement, for a total of 358 trucks. The eastern region route has the potential to divert 73 trucks from the east-to-north turning movement, 64 trucks from the north-to-east turning movement, 166 trucks from the south-to-east turning movement, and 154 trucks from the east-to-south turning movement, for a total of 457 trucks. The eastern region has the potential to reduce the most trucks and their turning movements from Culbertson.

2.2 *First Level Screening Results*

The results of the first level of screening are shown in Table 2. This screening process helped identify which region would alleviate the most truck traffic through Culbertson and which region could be dropped from further consideration.

Table 2. First Level Screening Results

Truck Route Region	Screening Criteria		Advanced to Second Level Screening
	<i>Accessibility to Weigh Scale</i>	<i>Truck Traffic Patterns</i>	
Western Region	No	No	No
Eastern Region	Yes	Yes	Yes


Because the Eastern Region has the highest potential to alleviate truck traffic through Culbertson, it has been forwarded to the next phase: Alternate Route Identification. It should be noted that even if the western truck route region was broken into northwest and southwest areas, trucks would still need to travel to the weigh scale and ultimately these routes would not be effective in alleviating truck traffic on Broadway Avenue.

Chapter 3 Alternate Truck Route Identification

This chapter presents the process used to develop potential alternate truck routes to US 2 and MT 16 on the eastern side of Culbertson. Alternate routes within the eastern region were identified based on input from the local government, community members, and engineering constructability. The alternate routes identified within this Technical Memorandum will be included in the Corridor Study Report document and will be forwarded to the screening process. The identification of alternate routes is necessary to determine which route locations are most relevant to carry forward into the secondary screening process to determine whether a single, feasible alternate route is possible.

To reduce truck impacts through Culbertson the most significantly, it would appear that an eastern region route consisting of both a northern segment and a southern segment together would be the most beneficial. Although each alternate route on its own could reduce some amount of truck traffic, together they could provide the most benefit and eliminate turning movement issues at the current intersections of MT 16 with US 2. This chapter investigates the individual alternate truck routes and then investigates whether the benefits of a northern and southern route together would outweigh the environmental and financial cost to the community.

Planning level cost estimates were developed for each alternate truck route. These costs are for construction only and are shown in 2012 dollars. Planning-level cost estimates do not include right-of-way acquisition, utility relocation, preliminary or construction engineering. These estimates reflect roadway costs and a bridge construction cost to arrive at the planning level cost estimates for each alternate route. The calculations by which the planning level cost estimates were derived are shown in Appendix A of this Technical Memorandum.

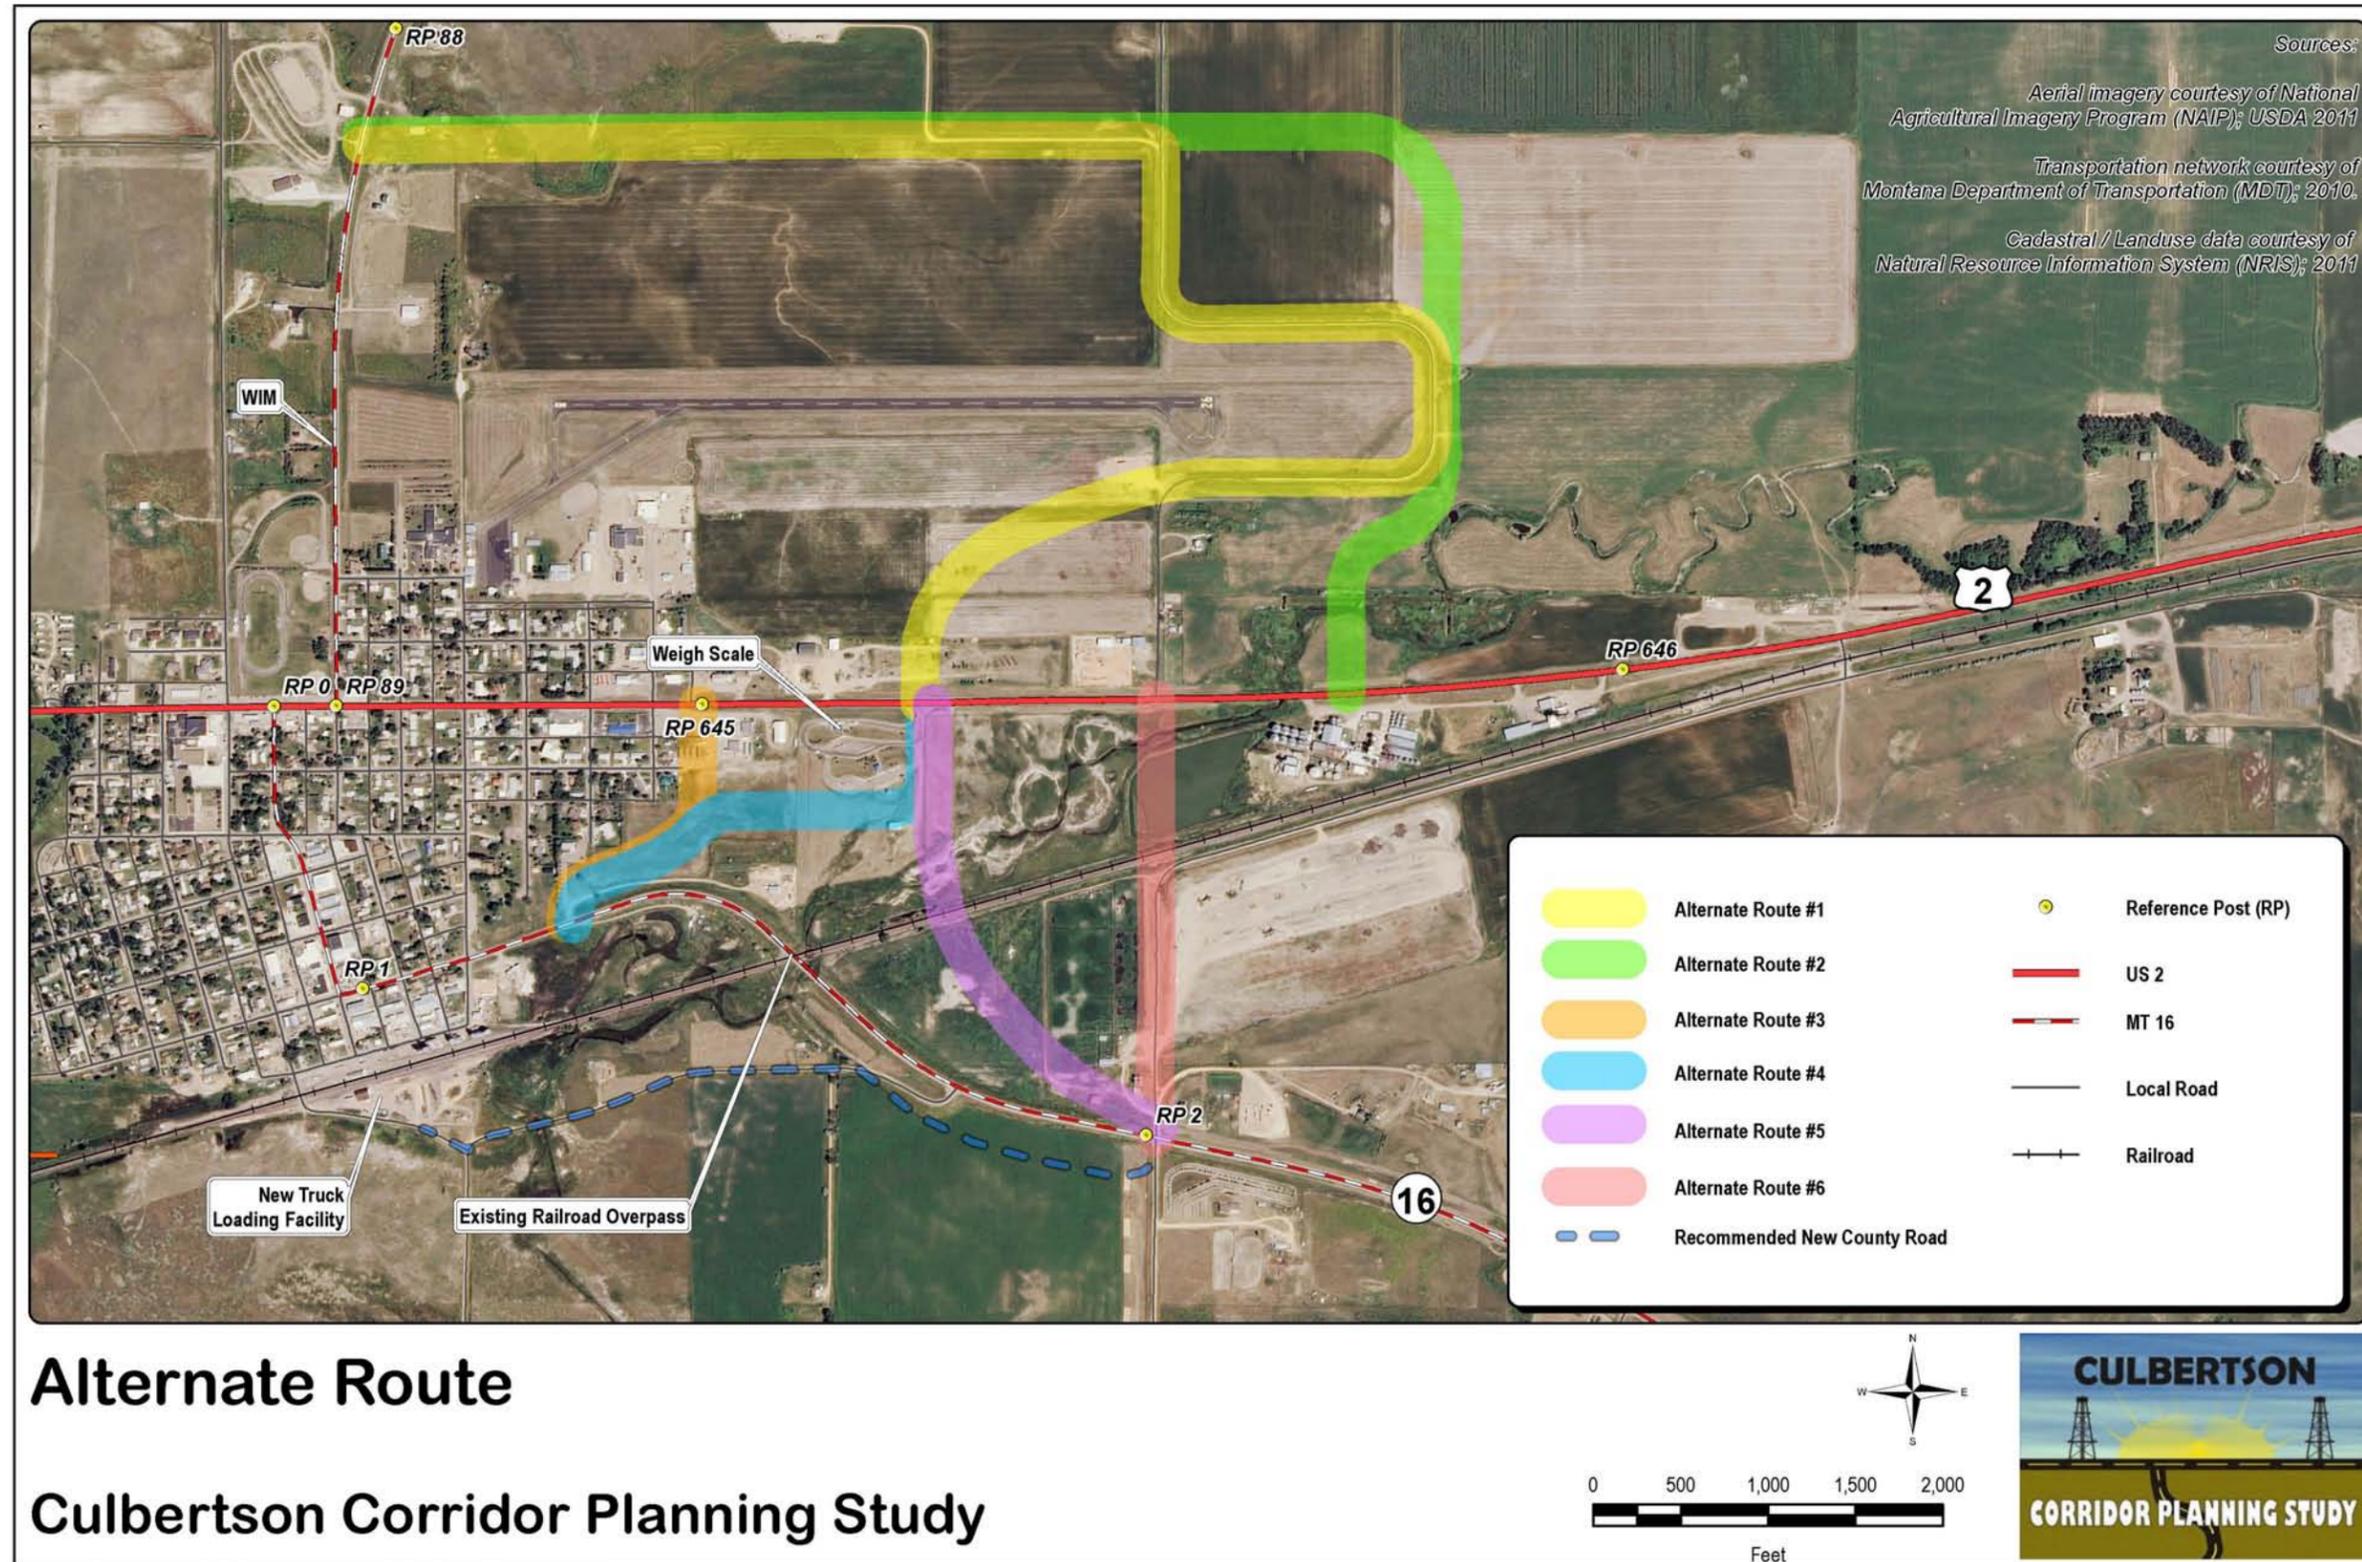

Alternate Route

Culbertson Corridor Planning Study

Figure 3. Alternate Route Overview Map

3.1 *Alternate Route #1*

This route starts on the north side of US 2 at the weigh scale entrance at approximate RP 645.2. This route heads northeast and follows County Road 1019 curving around the Big Sky Field property for approximately 1.33 miles where it turns west for approximately 0.87 miles until it intersected MT 16 (north) near RP 88.1. The total length for this alternate route would be approximately 2.2 miles. The estimated cost for this alternate route would range from \$3.1 to \$3.7 million dollars.

Alternate Route #1 was developed in order to avoid established, built facilities to the extent practicable and to use the existing County Road 1019 that has already been established. Because this route starts directly across from the weigh scale, it reduces the need for trucks to backtrack along US 2. This route would avoid wetlands, the airport, hazardous materials sites, and 4(f) and 6(f) sites. This route would not impact any residential or industrial structures but would require new right-of-way along its entirety. Bridges or large culverts would be necessary to cross two blue line intermittent streams and adjacent floodplains would be impacted. This route has the potential to encroach on habitat for the Whooping Crane and would impact farmland of statewide importance. This route has many sharp turns that would need to be lengthened during final design, possibly making this route longer.

3.2 *Alternate Route #2*

Starting on US 2 at approximate RP 645.7, Alternate Route #2 would curve northeast for approximately 0.31 miles where it would follow the existing County Road 1019 and head north for approximately 0.37 miles before turning west for approximately 1.11 miles until it intersects MT 16 (north) at approximate RP 88.1. The total length for this alternate route would be approximately 1.8 miles. The estimated cost for this alternate route would range from \$2.8 to \$3.3 million dollars.

Alternate Route #2 was developed in order to avoid impacts to the airport and minimize impacts to Clover Creek to the extent practicable. This route would avoid wetlands, hazardous material sites, and 4(f) and 6(f) sites. This route would not impact any residential or industrial structures but would require new right-of-way along its entirety. Bridges or large culverts may be necessary to cross two blue line intermittent streams and Clover Creek and adjacent floodplains would be impacted. This route has the potential to encroach on habitat for the Whooping Crane. This route would impact farmland of statewide importance, and the primary land use type along this route is agricultural rural. It should be noted that because this route does not line up with the weigh scale, trucks would need to backtrack along US 2 before proceeding to their destination.

3.3 *Alternate Route #3*

Starting on US 2 at approximate RP 645.0, Alternate Route #3 would head south for approximately 0.12 miles and arc southwest for approximately 0.20 miles until it intersects MT 16 (south) at a right angle at approximate RP 1.2. This connection with MT 16 (south) would allow for less cut and fill because this is the closest level point west of the current overpass structure. The total length for this alternate route would be approximately 0.32 miles. The estimated cost for this alternate route would range from \$0.7 to \$0.8 million dollars.

Alternate Route #3 was developed in order to avoid impacts to Clover Creek, BNSF Railway, residential and industrial areas, and based on public input. Although this route currently avoids residential and industrial areas, it has received recent interest in developing the area to include a potential motel and large RV park. This route would not impact wetlands, floodplains, waterways, hazardous material sites, 4(f) and 6(f) sites, or farmland. This route would provide the shortest distance to link US 2 and MT 16 and would utilize an existing approach along MT 16 and impact a portion of vacant rural land. There is currently an existing man camp located south of US 2, near RP 645, that should be minimized to the extent practicable. This route has the potential to encroach on the Western Hog-nosed Snake and habitat for the Whooping Crane. It should be noted that because this route does not line up with the weigh scale, trucks would need to backtrack along US 2 before proceeding to their destination. Addressing any sight distance issues with the connection to MT 16 (south) would be determined during final design if this alternate route is forwarded from this study.

3.4 *Alternate Route #4*

This route starts at the weigh scale entrance at approximate US 2 RP 645.2. This route would follow the existing weigh scale road for approximately 0.10 miles where it would skirt the rest area buildings and turn west approximately 0.23 miles and head southwest for approximately 0.21 miles where it intersects MT 16 (south) at a right angle at approximate RP 1.2. This connection with MT 16 (south) would allow for less cut and fill because this is the closest level point west of the current overpass structure. The total length for this alternate route would be approximately 0.54 miles. The estimated cost for this alternate route would range from \$1.0 to \$1.2 million dollars.

Alternate Route #4 was developed based on public input and would avoid impacts to Clover Creek, BNSF Railway, and residential and industrial areas. Although this route currently avoids residential and industrial areas, it has received recent interest in developing the area to include a potential motel and large RV park. In addition, this route would not impact wetlands, floodplains, waterways, hazardous material sites, 4(f) and 6(f) sites, or farmland. Alternate Route #4 would provide a direct connection to the weigh scale. Because this route starts directly across from the weigh scale, it reduces the need for trucks to backtrack along US 2. The route would utilize an existing approach along MT 16 and impact a portion of vacant rural land. The majority of this route exists on State of Montana land. This route has the potential to encroach on the Western Hog-nosed Snake and habitat for the Whooping Crane. Addressing any sight distance issues with the connection to MT 16 (south) would be determined during final design if this alternate route is forwarded from this study.

3.5 *Alternate Route #5*

This route is a north-south connection starting on US 2 at the weigh scale at approximate RP 645.2 and proceeds south and east to where a perpendicular overpass for the BNSF railway would be needed. The route would continue to travel southeast until it intersected MT 16 (south) at RP 2.0. The total length for this alternate route would be approximately 0.59 miles. A new railroad overpass is required for this alternate route in order to provide adequate vertical clearance of the railroad and Clover Creek. A floodplain is located along Clover Creek. The estimated cost for this alternate route would range from \$2.9 to \$3.5 million dollars.

Alternate Route #5 was originally developed based on public input and direct access to the weigh scale. Because this route starts directly across from the weigh scale, it reduces the need for trucks to backtrack along US 2. Alternate Route #5 was slightly modified to allow for a more constructible route that would avoid both a built-up elevation of and skewed intersection with the current overpass. A large portion of the land along this route is located on State of Montana property and the rest is on either agricultural rural or vacant rural land. This route would not impact wetlands, hazardous material sites, or farmland. This alignment has the potential to encroach on habitat for the Whooping Crane.

3.6 *Alternate Route #6*

This route is a straight north-south alignment between MT 16 (south) and US 2 that was recommended by the community. This route would start on US 2 at approximate RP 645.5 and head south where it would connect to and continue along County Road 1020 until it intersects US 2 at RP 2.0. An overpass would need to be constructed for this route over the BNSF Railway. The total length for this alternate route would be approximately 0.47 miles. The estimated cost for this alternate route would range from \$4.6 to \$5.5 million dollars.

Alternate Route #6 was developed based on public input and the use of existing County Road 1020. This route would utilize the existing County Road for approximately 0.25 miles and then require a new railroad overpass. This route would impact the wetland area and Clover Creek located between BNSF Railway and US 2. Consideration should be given to the design of the overpass and determine the level of impact the end of the structure may have on the wetland and/or Clover Creek as well as the proximity to US 2. This route is located approximately 0.15 miles east of the weigh scale. Alternate Route #6 does not impact farmland, floodplains, and 4(f) or 6(f) properties. The route has the potential of impacting a hazardous material site (Montola Growers Inc.). This alignment has the potential to encroach on habitat for the Whooping Crane. It should be noted that because this route does not line up with the weigh scale, trucks would need to backtrack along US 2 before proceeding to their destination.

3.7 *New SE County Road*

The new County Road alignment was brought forth by the local government officials as a necessity to address the projected truck traffic expected from the new loading facility located south of the railroad tracks and southwest of MT 16 (south). There are two current routes to the new loading facility: across the at-grade railroad crossing off 1st Street West or County Road 2059. County Road 2059 is not a preferred route for trucks because of the steep grade leading up to the intersection with MT 16 (south). In an attempt to avoid truck usage of the at-grade crossing located off 1st Avenue West, the local government officials recommended a new route.

Starting on MT 16 (south) at RP 2.0, the new County Road alignment would generally parallel MT 16 (south) for approximately 0.38 miles at which time it would meet and use the existing County Road 2059 for approximately 0.47 miles. This route would avoid to the extent practicable the steepest elevation changes associated with the adjacent overpass. The total length for this alternate route would be approximately 0.85 miles.

This new County Road alignment would impact a blue line intermittent stream, floodplain, and wetlands. There is a small potential for impacts to farmland of statewide importance near the intersection of MT 16. This alignment has the potential to encroach on the Eastern Red Bat and habitat for the Whooping Crane.

3.8 ***Necessity of Improvement Options with Implementation of Alternate Route***

In order to determine if improvement options would still be necessary after an alternate route was implemented, each improvement option was analyzed against each alternate route. To determine if a combination of a northern and southern route would provide additional benefits, each improvement option was analyzed against a north/south alternate route combination. It should be noted that no specific north and south alignment were determined, but rather a conceptual analysis of any combination of north and south options was performed. Table 3 shows which improvement options would still be necessary if each respective alternate route was implemented.

Table 3. Improvement Options Still Necessary with Implementation of Alternate Route

Improvement Options	Individual Alternate Routes						Combination
	#1	#2	#3	#4	#5	#6	North and South
1. Urban Amenities on MT 16 and US 2	X	X	X	X	X	X	X
2. Flashing Pedestrian Beacon	X	X	X	X	X	X	X
3. Non-Motorized Transportation Plan	X	X	X	X	X	X	X
4. "Share the Road" Signs	X	X	X	X	X	X	X
5. Bulb-Out at MT 16 (South) & 2 nd Street							
6. Geometric Upgrade of MT 16 (north) / US 2 Intersection*	X	X	X	X	X	X	
7. Upgrade MT 16 (south) / US 2 Intersection	X	X					
8. MT 16 (North) Realignment	X	X	X	X	X	X	
9. Sight Distance Improvements at Project Intersections	X	X	X	X	X	X	X
10. Four Lane US 2**	X	X	X	X	X	X	X
11. 7 th Street Couplet**	X	X	X	X	X	X	X
12. 8 th Street Couplet**	X	X	X	X	X	X	X
13. Weigh-in-Motion Systems*	X	X					X
14. Access Management Plan	X	X	X	X	X	X	X
15. US 2 Speed Study	X	X	X	X	X	X	X

*Note: Because at least 15 percent of trucks currently proceed to the weigh scale before proceeding to their destination, it is likely that trucks would use the current MT 16 (north) through the current WIM system instead of directly to the weigh scale as this has the potential to shorten their trip.

**Note: Only one of these 4-lane options would be implemented, not all three.

It was determined that all pedestrian improvement options related to US 2 would still be necessary even if an alternate route was implemented because traffic, both heavy vehicles and other vehicles, would still use US 2. An access management plan would also be necessary due to the traffic on US 2, regardless of the alternate route. As noted by the double asterisk following Table 3, only one four-lane facility option would be recommended to address functional issues along US 2. As far as improvement options are concerned, the only benefit to combining a northern and southern alternate route would be to possibly eliminate intersection upgrades to the intersections of MT 16 with US 2 and to eliminate the realignment of MT 16 (north).

Chapter 4 Second Level Screening

In order to determine the preferred alternate route(s), the six alternate routes developed in the eastern region were screened through a second level of criteria. The screening process relied on evaluating these alternate routes using three criteria. The three criteria are as follows:

Analysis No. 1 – Travel Time: Because drivers tend to take the shortest route to their destination, each alternate route was studied against the current route of trucks to see if the time between points would provide a benefit or add travel time.

Analysis No. 2 – Impacts: Each alternate route was assessed to determine if there was a substantial order of magnitude difference in impacts between various alignments.

Analysis No. 3 – Construction Cost Comparison (in 2012 dollars): This analysis is used to document the order of magnitude planning level costs for each alternate route. These costs reflect the planning level roadway costs assigned in the previous section.

For each criterion, the six alignments were given a numerical rating value of one to six, with one denoting the best option. The analysis of the three screening criteria is described in the following sections and presented in Table 8.

4.1 *Travel Time*

Because drivers tend to take the shortest route to their destination, each alternate route was studied against the current route of trucks to see if the travel time between points would provide a benefit or add time of travel. Since all trucks need to proceed to the weigh scale, all travel time was determined to be from the entrance of the weigh scale to the intersection along either US 2 or MT 16 at which the alternate route leaves the main thoroughfare.

The travel time for each route was computed based on the different posted speeds along each route and the length of travel at each speed variation. Approach delays were also considered. Figure 4 shows the locations at which approach delays were considered. It should be noted that approach delays were only calculated for four intersections through level of service analysis. Table 4 shows the approach delays calculated for these four intersections. All other approach delays were assumed based on the results of the four studied intersections. The assumptions for the intersections that were not calculated by traffic modeling include the following approach delays:

- 0 Seconds – Right turning movement from major leg to minor leg.
- 2 Seconds – Left turning movement from major leg to minor leg.
- 5 Seconds – Right turning movement from minor leg to major leg.
- 10 Seconds – Left turn from minor leg to major leg or thru movement across major leg from minor leg to minor leg.

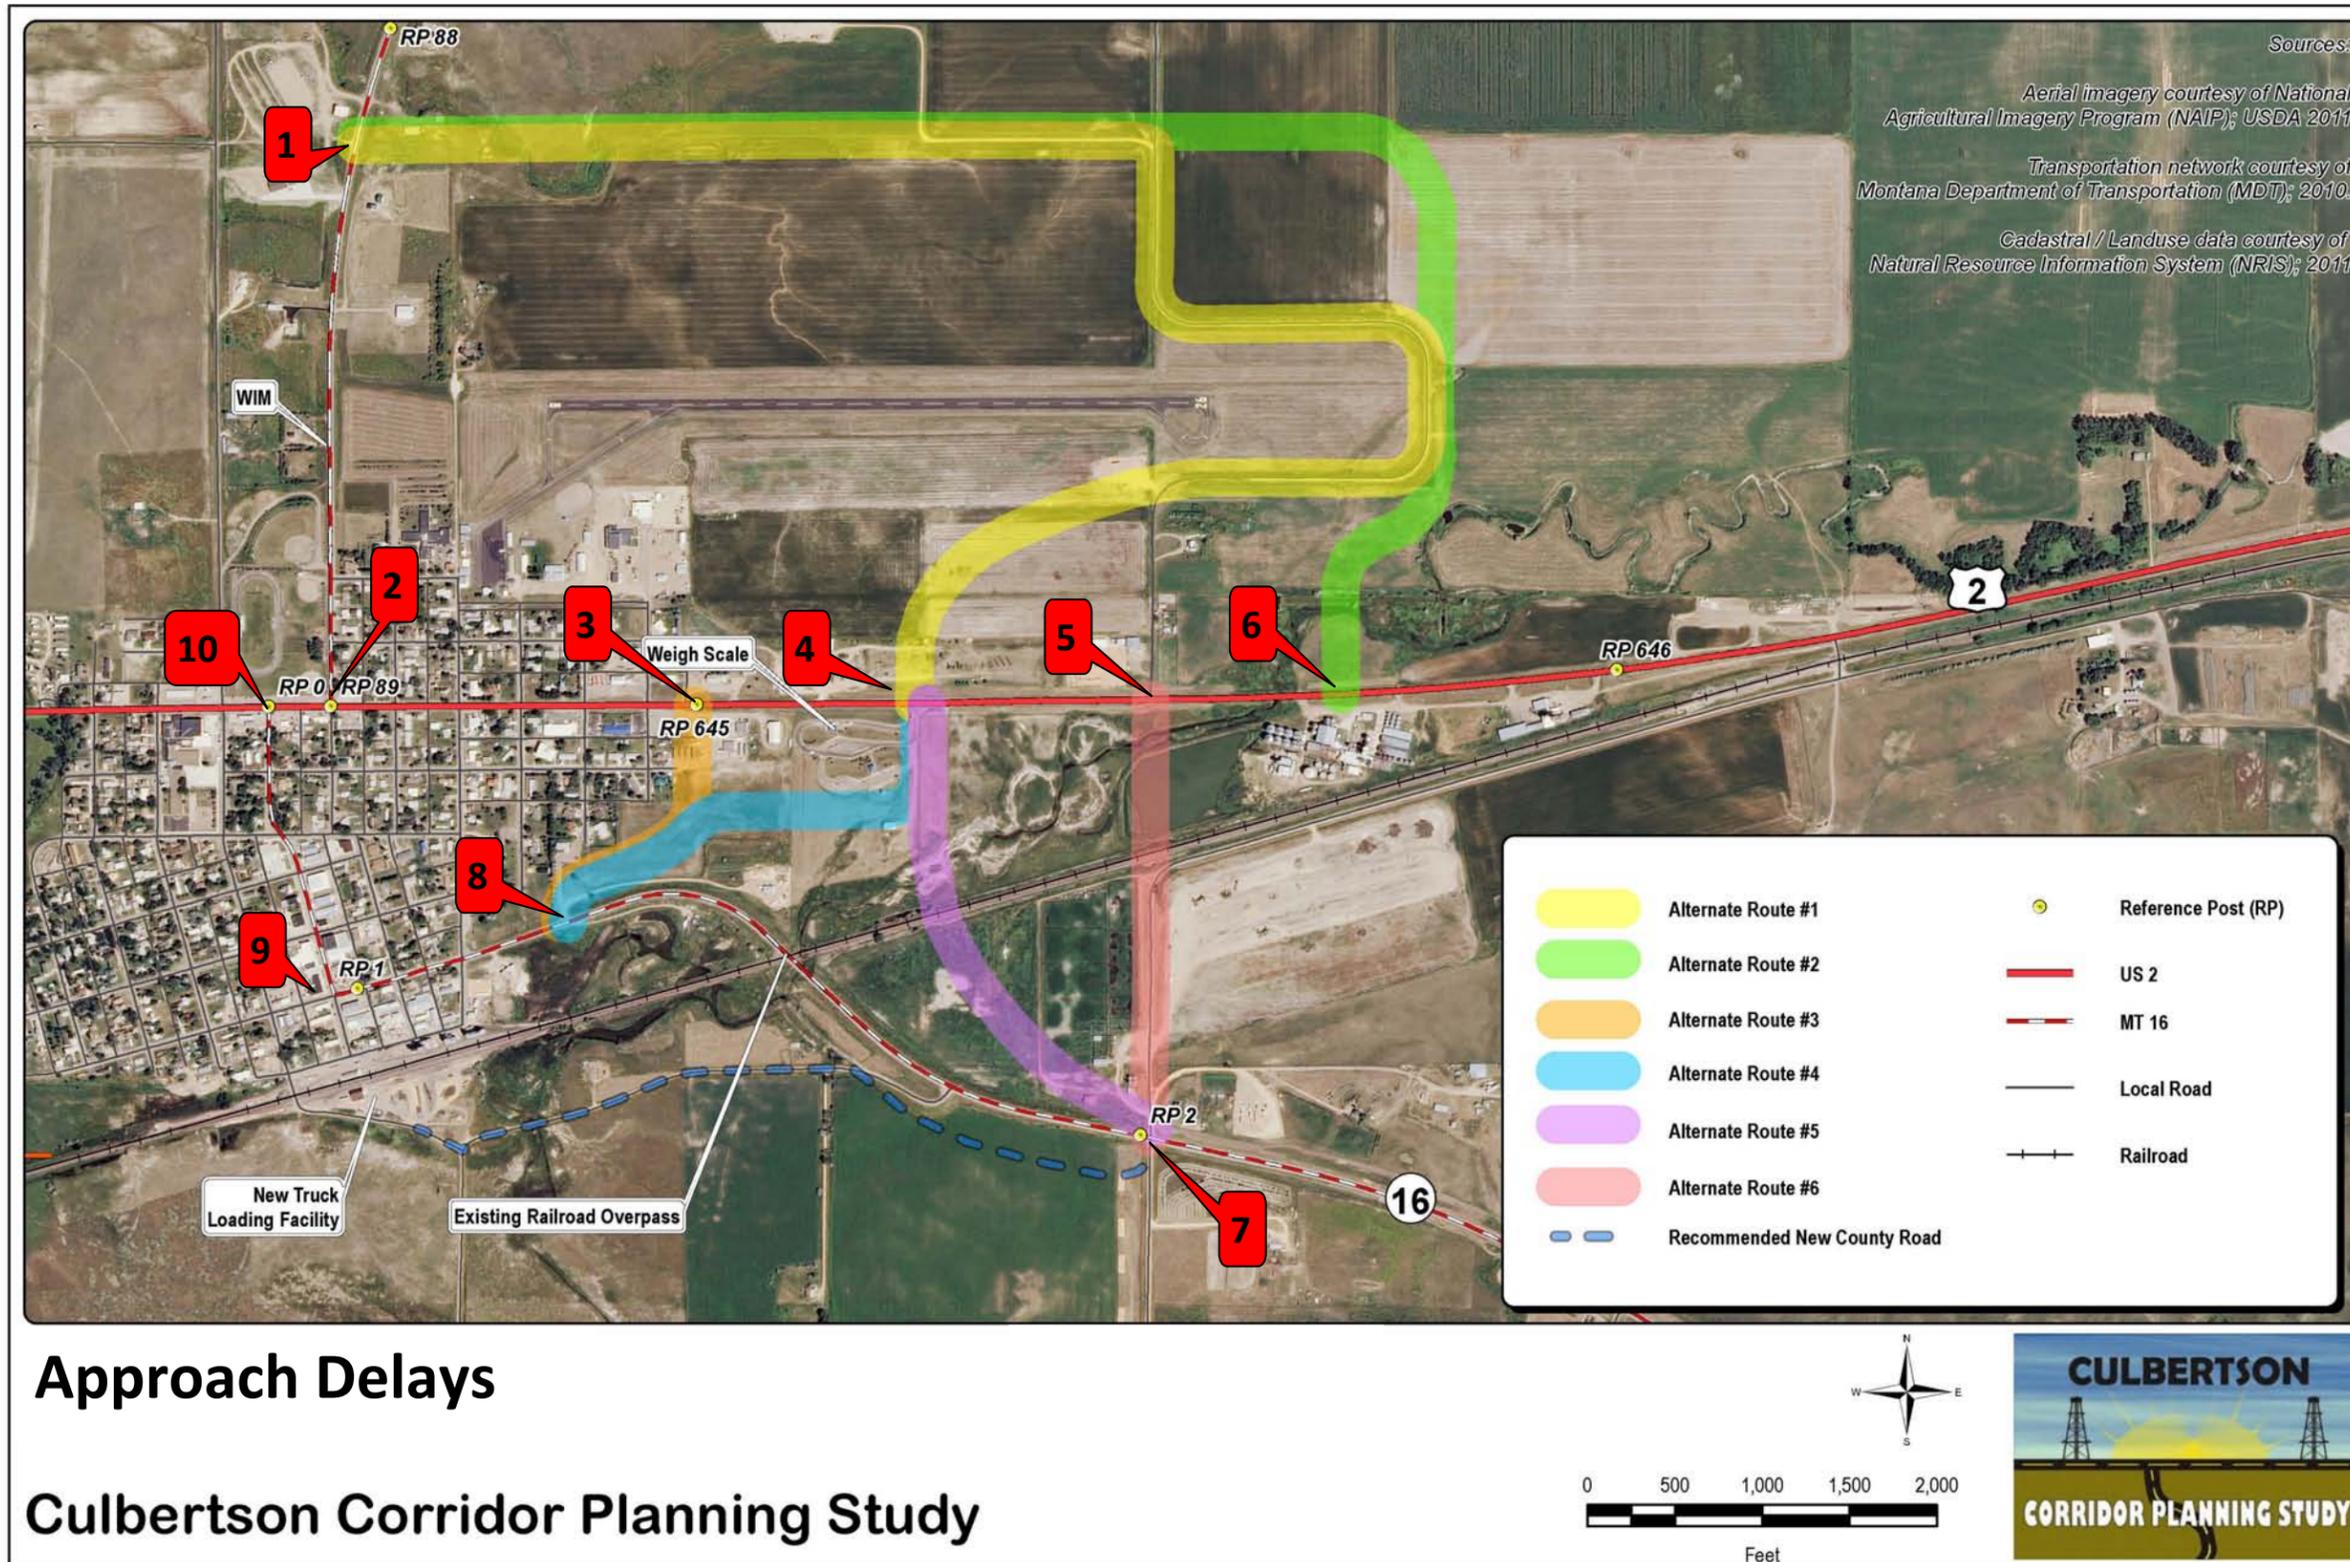


Figure 4. Approaches with Delays

Table 4. Calculated Approach Delays

Approach No. (per Figure 4)	Intersection Description	Leg	Approach Delay* (seconds)
2	MT 16 (north) / US 2	NB	10.6
		SB	10.5
		EB	2.3
		WB	0.3
7	MT 16 (south) at RP 2.0 / County Road 1020	NB	9.3
		SB	9.5
		EB	0.6
		WB	0
9	MT 16 (south) / 1 st Street / Broadway Avenue	NB	7.6
		SB	0
		EB	10.9
		WB	9.5
10	MT 16 (south) / US 2	NB	10.6
		EB	0
		WB	3.5

**Note: The approach delays were calculated using HCS level of service modeling.*

In order to provide a comparative analysis of the alternate routes, the northern alternate routes were measured against the current northern route from RP 88.1 on MT 16(north) to the weigh scale along US 2 at RP 645.2. Similarly, the southern alternate routes were measured against the current southern route from RP 2.0 on MT 16 (south) to the weigh scale. Table 5 shows a breakdown of the distance, respective speed limit, and approach delay(s) equating to the total travel time of each alternate route and each current route. Each alternate route was compared to the current route to determine if the alternate route would add or reduce time of travel. A negative value in the difference column denotes the time saved by using the respective alternate route.

Table 5. Travel Time Rating

Alternate Route	Route Distance (miles)	Associated Speed (MPH)	Average Approach Delay(s) (seconds)*	Total Time (seconds)	Time Difference (seconds)	Rating**
Current Northern Route	0.27	65	11	132	0	N/A
	0.32	45				
	0.30	35				
	0.35	25				
Alternate Route #1	2.2	55	13	157	+25	5
Alternate Route #2	2.25	55	13	160	+28	6
Current Southern Route	0.25	65	17	228	0	N/A
	0.60	45				
	0.40	35				
	0.75	25				
Alternate Route #3	0.25	65	16	137	-91	3
	0.40	45				
	0.28	35				
	0.32	25				
Alternate Route #4	0.25	65	5	137	-91	3
	0.40	45				
	0.08	35				
	0.54	25				
Alternate Route #5	0.59	55	5	43	-185	1
Alternate Route #6	0.72	55	16	63	-165	2

*Note: This analysis is the average of the delay experienced between the two directions of travel.

**Note: This analysis was based on a numerical rating value of one to six, with one denoting the best option.

4.2 Impacts

Impacted acreage for wetlands, floodplains, farmlands of statewide importance, and private right-of-way (ROW) were calculated for each alternate route. Acreage for each resource was determined based on the following equation:

Formula 1:

$$acres = \frac{\text{length of roadway(mi)} * 5280 \frac{ft}{mi} * 80ft \text{ ROW from centerline} * 2sides}{43,560 \frac{ft^2}{acre}}$$

It should be noted that right-of-way calculations for alternate routes 1 and 2 did not include the locally-owned areas near the airport or near the rodeo grounds. Similarly, alternate routes 4 and 5 did not include the MDT-owned parcel surrounding the weigh scale.

All alternate routes have the potential to impact Whooping crane habitat; therefore, all alternate routes show at least one species of concern (SOC) impacted. In addition to the Whooping crane habitat, alternate routes 3 and 4 would also impact the hog-nosed snake. Any alternate route would need to clearly avoid the BNSF Railway via an overpass because the BNSF Railway is considered a 4(f) resource. No other 4(f) resources are located in the vicinity of the proposed alternate routes. Alternate Route #6 would impact the hazardous waste site previously owned by Montola Growers, Inc. For purposes of this study, ROW widths were based on 80 feet each side of centerline, which is the typical width for the type of roadway facility anticipated for each alternate route.

An alternate route's ability to reduce truck traffic was also computed. It should be noted that all northern alternate routes would reduce the same number of trucks and all southern alternate routes would reduce the same number of trucks. The number of trucks each alternate route has the potential to reduce was determined from the turning movement counts on Figure 2. For the northern routes, alternate routes #1 and #2, it was assumed that the added travel time and travel distance of a northern route would not entice all 117 southbound truck drivers on MT 16 (north) to use the route because they may rather use the current route. These alternate routes may only capture the 64 trucks heading east from MT 16 (north) and the 73 trucks heading north from the weigh scale. As such, these alternates route would draw only 137 trucks per day. Alternate routes 3-6 would have the potential to draw trucks heading east from MT 16 (south) (166 trucks per day), trucks heading south from US 2 (154 trucks per day), and trucks heading east through the MT 16 (south) / US 2 intersection if their reason for heading east was to access the weigh scale (97 trucks per day). Alternate routes 3-6 have the potential to draw up to 417 trucks per day off of MT 16 (south) and US 2. Table 6 shows the alternate route ratings and the comparative impact analysis.

Table 6. Impacts Rating

Alternate Route	Wetland (acres)	Rating*	Floodplain (acres)	Rating*	Farmland (acres)	Rating*	Private ROW** (acres)	Rating*	Species of Concern Impacted	Rating*	Hazardous-Waste Sites	Rating*	Truck Traffic Reduction (trucks/day)	Rating*	Total Rating	Overall Rating*
Alternate Route #1	0	1	14.0	5	14.0	6	29.5	5	1	1	0	1	137	5	24	5
Alternate Route #2	0	1	14.0	5	12.4	5	34.3	6	1	1	0	1	137	5	24	5
Alternate Route #3	0	1	0	1	0	1	7.0	1	2	5	0	1	417	1	11	1
Alternate Route #4	0	1	0	1	0	1	7.0	1	2	5	0	1	417	1	11	1
Alternate Route #5	0	1	1.8	4	0	1	8.1	3	1	1	0	1	417	1	12	3
Alternate Route #6	2.2	6	0	1	0	1	10.3	4	1	1	1	6	417	1	20	4

*Note: This analysis was based on a numerical rating value of one to six, with one denoting the best option.

**Note: Private right-of-way was calculated using Formula 1; however, for alternate routes 1, 2, 4, and 5, private right-of-way did not include the locally-owned areas near the airport or near the rodeo grounds, or the MDT-owned parcel surrounding the weigh scale.

4.3 **Construction Cost Comparison**

As stated previously, planning level cost estimates were developed for each alternate route. These costs included construction costs only in 2012 dollars. The planning-level costs did not include right-of-way acquisition, utility relocation, preliminary or construction engineering. The costs reflect the planning level roadway costs and a planning level bridge construction cost to arrive at the planning level cost estimates for each alternate route. Each cost projection was inflated by a 20 percent contingency factor to account for preliminary engineering costs, construction engineering costs, and indirect cost accounting procedure costs. Table 7 shows the range of costs for the bridge, roadway, and combined costs.

Table 7. Construction Cost Comparison Rating

Alternate Route	Bridge Cost	Roadway Cost	Total Cost	Rating*
Alternate Route #1	-	\$3.1M to \$3.7M	\$3.1M to \$3.7M	5
Alternate Route #2	-	\$2.7M to \$3.3M	\$2.7M to \$3.3M	3
Alternate Route #3	-	\$0.7M to \$0.8M	\$0.7M to \$0.8M	1
Alternate Route #4	-	\$1.0M to \$1.2M	\$1.0M to \$1.2M	2
Alternate Route #5	\$2.1M to \$2.5M	\$0.8M to \$1.0M	\$2.9M to \$3.5M	4
Alternate Route #6	\$4.2M to \$5.0M	\$0.4M to \$0.5M	\$4.6M to \$5.5M	6

*Note: This analysis was based on a numerical rating value of one to six, with one denoting the best option.

4.4 **Recommendation for Alternate Routes to Carry Forward**

After review and analysis of all the information, it is recommended to carry forward two individual alternate routes for further consideration as a project moves forward from this study. A summary of the second level of screening is shown in Table 8.

Table 8. Second Screening Summary

Alternate Route	Travel Time Rating*	Impacts Rating*	Construction Cost Rating*	Total Rating
Alternate Route #1	5	5	5	15
Alternate Route #2	6	5	3	14
Alternate Route #3	3	1	1	5
Alternate Route #4	3	1	2	6
Alternate Route #5	1	3	4	8
Alternate Route #6	2	4	6	12

*Note: This analysis was based on a numerical rating value of one to six, with one denoting the best option.

The second level of screening showed Alternate Route #5 rating below alternate routes #3 and #4 due to cost. Although Alternate Route #5 has a higher construction cost, the option would provide trucks with a more direct connection to the weigh scale by eliminating curves and reducing travel time. Intersecting MT 16 (south) near RP 2, Alternate Route #5 provides trucks with convenient access to the new grain loading facility. For these reasons, the Town of Culbertson noted that Alternate Route #5 was their preferred alternate route. In terms of long-range planning, the Town of Culbertson noted that Alternate Route #5 provided for a route in line with their 50 year plan. Additionally, alternate routes #3 and #4 may not be viable options in the near future due to their location relative to the community and projected development in the area. For these reasons alternate routes #3 and #4 have been eliminated from further consideration at this time.

Because Alternate Route #5 is located south of US 2 and east/north of MT 16 (south), it has the potential to alleviate the most truck traffic through Culbertson. Alternate Route #5 is the most feasible route because of its close proximity to the weigh scale, its relatively low cost of construction, and its small number of impacts. For these reasons and those noted above, Alternate Route #5 was retained to be carried forward if a project moves forward from this study. Because there is a viable alternate route with fewer impacts, a lower cost, and better travel time located in the same area, Alternate Route #6 have been eliminated from further consideration at this time.

Although a northern and southern route combination would appear to minimize truck turning movements at the intersections of MT 16 and US 2 and would conceptually provide the most benefit, it was determined that since neither of the northern alternate routes would provide a benefit to travel time or to overall truck volumes, a northern/southern route combination would not provide an equitable benefit for the cost and impacts of construction. The option to pair a northern and southern route together is not recommended at this time. For these reasons and the analysis provided above, alternate routes #1 and #2 have been eliminated from further consideration at this time.

Appendix A:
Cost Estimating Spreadsheet

Culbertson Corridor Planning Study
Second Level Screening Matrix - PLANNING LEVEL COST ESTIMATES
 May 15, 2012

Roadway Construction Costs							
	Total Route Length (mile)	Clover Creek/BNSF Bridge Length (mile)	Rural Route on Existing Alignment* (mile)	Rural Route on New Alignment (mile)	Urban Route(mile)	Cost of Actual Roadway	
Alternate Route #1	2.20	0	1.12	1.08		\$3,072,000	
Alternate Route #2	1.80	0	0.34	1.46		\$2,744,000	
Alternate Route #3	0.32	0			0.32	\$704,000	
Alternate Route #4	0.54	0	0.06	0.21	0.27	\$1,002,000	
Alternate Route #5	0.59	0.09	0.07	0.43		\$773,576	
Alternate Route #6	0.47	0.17	0.27	0.03		\$368,242	

**Existing Alignment assumes route will follow an established roadway facility.*

Bridge Construction Costs				
	Clover Creek/BNSF Bridge Length (feet)	Total Bridge Area* (ff ²)	Cost per Ff ²	Cost of Bridge
Alternate Route #5	470	18800	115	\$ 2,162,000
Alternate Route #6	910	36400	115	\$ 4,186,000

**Bridge surface width is assumed to be 40 feet to match roadway top width. Location of bridge ends are assumed to be 100 feet from Clover Creek and for BNSF railway centerline according to available satellite imagery.*

Assumes continuous span over BNSF and Clover Creek.
Assumes continuous span over BNSF, Clover Creek, and Wetland.

Cost Estimate Assumptions (provided by MDT Glendive District):			
40' Top Width			
5" Asphalt			
22" of Gravel & Average Grading Amounts			
Rural Reconstruction on New Alignment =	\$1,600,000	mile	
Rural Major Rehabilitation on Existing Alignment =	\$1,200,000	mile	
Urban Major Rehabilitation on Existing Alignment =	\$2,200,000	mile	
New Bridges =	\$115	ff ²	

	TOTAL COST	w/20% Cont.
Alternate Route #1	\$3,072,000	\$3,686,400
Alternate Route #2	\$2,744,000	\$3,292,800
Alternate Route #3	\$704,000	\$844,800
Alternate Route #4	\$1,002,000	\$1,202,400
Alternate Route #5	\$2,935,576	\$3,522,691
Alternate Route #6	\$4,554,242	\$5,465,091

RANGE OF PLANNING COSTS		
\$3.1 M	to	\$3.7 M
\$2.8 M	to	\$3.3 M
\$704 K	to	\$845 K
\$1.0 M	to	\$1.2 M
\$2.9 M	to	\$3.5 M
\$4.6 M	to	\$5.5 M