




NOTES:

- ① DO NOT PLACE TOPSOIL WITHIN 1'-8" [0.5 m] OF THE EDGE OF PAVEMENT.
- ② PLACE TOPSOIL ON THE SURFACING INSLOPE TO A DEPTH OF 4" [100] (±) NOT LESS THAN 2'-0" [0.6 m] FROM THE EDGE OF SEEDING. FEATHER TOPSOIL TO THE EDGE OF SEEDING.
- ③ SEED AREAS BEYOND THE CONSTRUCTION LIMITS WITHIN THE RIGHT-OF-WAY OR PERMIT BOUNDARIES THAT HAVE BEEN DISTURBED (ie. STAGING AREAS, TOPSOIL PILES, EQUIPMENT TRAILS, etc.).
- ④ SALVAGE SUFFICIENT AMOUNTS OF TOPSOIL TO ASSURE QUANTITIES ARE AVAILABLE TO COVER ALL CLEARED AND GRUBBED AREAS WITH 4" [100] OF TOPSOIL. IF QUANTITIES ARE NOT AVAILABLE, RE-SPREAD TOPSOIL TO AN EVEN DEPTH ACROSS ALL DISTURBED GROUND.

UNITS SHOWN IN BRACKETS [ ] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

SEEDING		
AREA NO.	DEFINITION	TREATMENT
1	3:1 OR FLATTER SLOPES	CONDITION SEEDBED, SEED & FERTILIZE
2	STEEPER THAN 3:1 SLOPES	SEED, FERTILIZE & MULCH
3	15' [4.5 m] OR TO THE EDGE OF THE SURFACING INSLOPE, WHICHEVER IS GREATER	CONDITION SEEDBED & SEED

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	610-00
SECTION 610	
TOPSOIL AND SEEDING	
<b>MDT</b> MONTANA DEPARTMENT OF TRANSPORTATION	

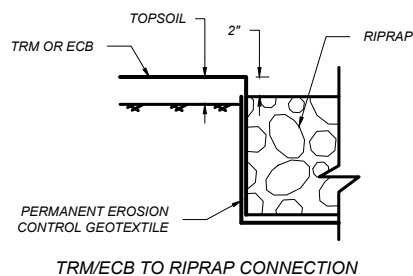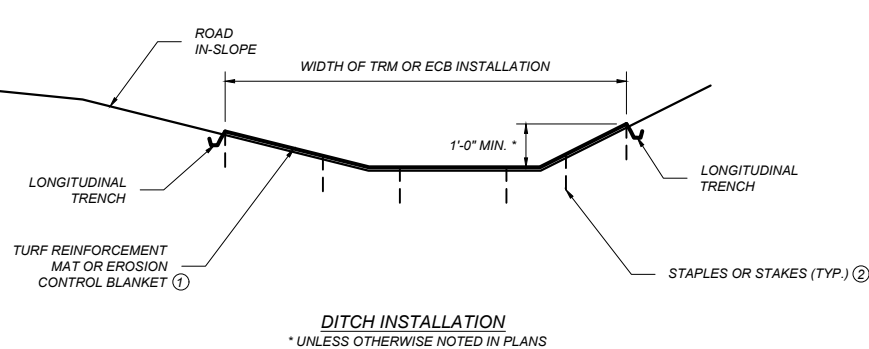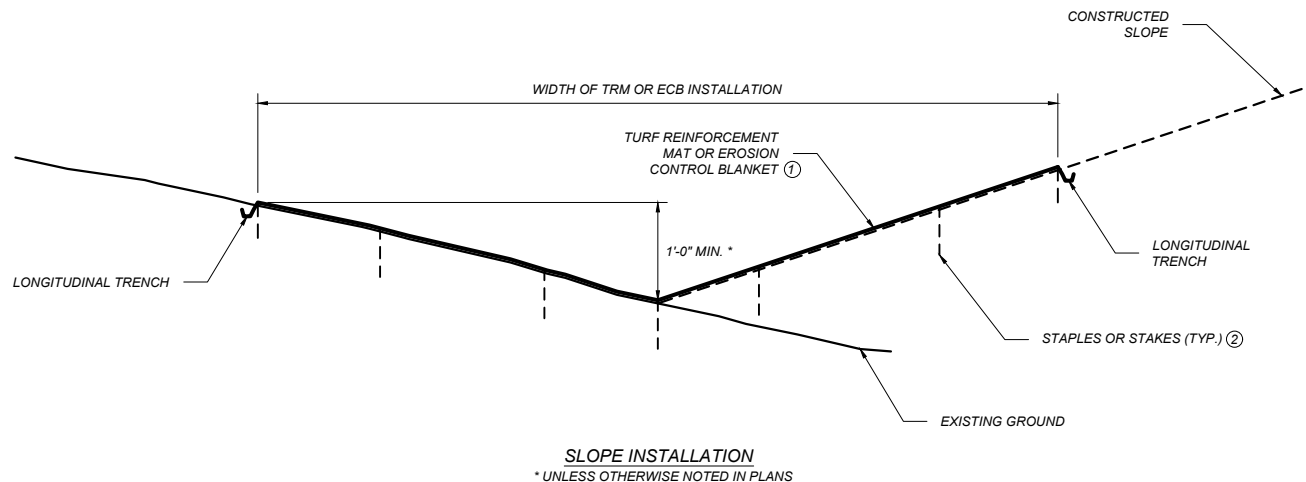

**NOTES:**

- ① INSTALL IN ACCORDANCE WITH THE DEPARTMENT'S BMP MANUAL AND SECTION 610.
- ② USE STAPLES OR STAKES IN ACCORDANCE WITH SECTION 610.

**DETAILED DRAWINGS**

REFERENCE DWG. NO.  
STANDARD SPEC. 610-05  
SECTION 610

**ROLLED EROSION CONTROL (REC)**

EFFECTIVE: JAN 23, 2020



--REVISED--  
JAN 15, 2026  
####  
####

12/12/2025 2:26 PM

STDDRD610005.DWG