
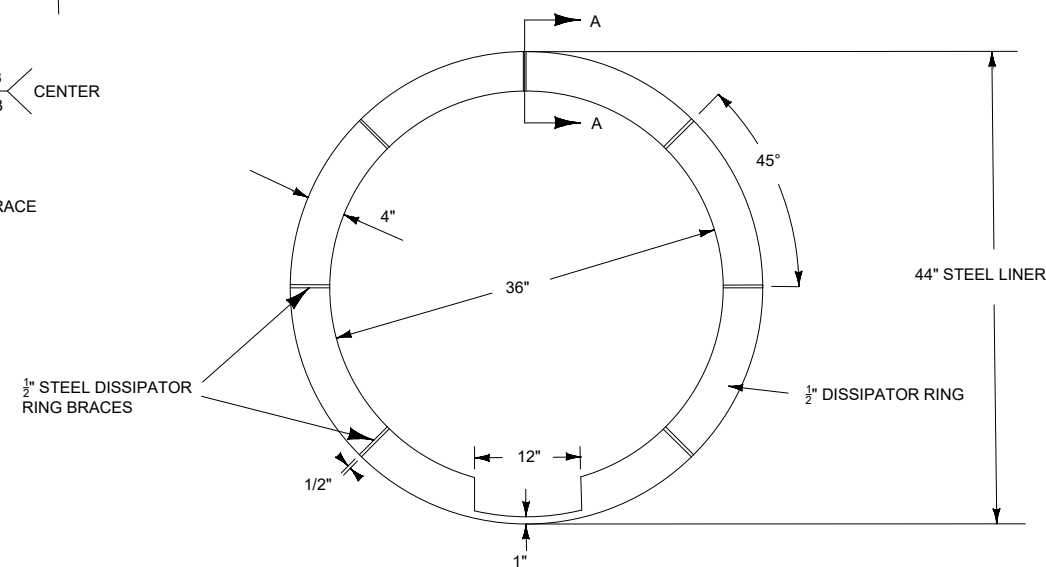


NO SCALE

5.) FOR CIPP INSTALLATION, CONNECTION DETAIL MUST BE DETERMINED BY CONTRACTOR AND MUST BE COMPLETED FOLLOWING MANUFACTURER REQUIREMENTS, METHODS, AND STANDARDS.

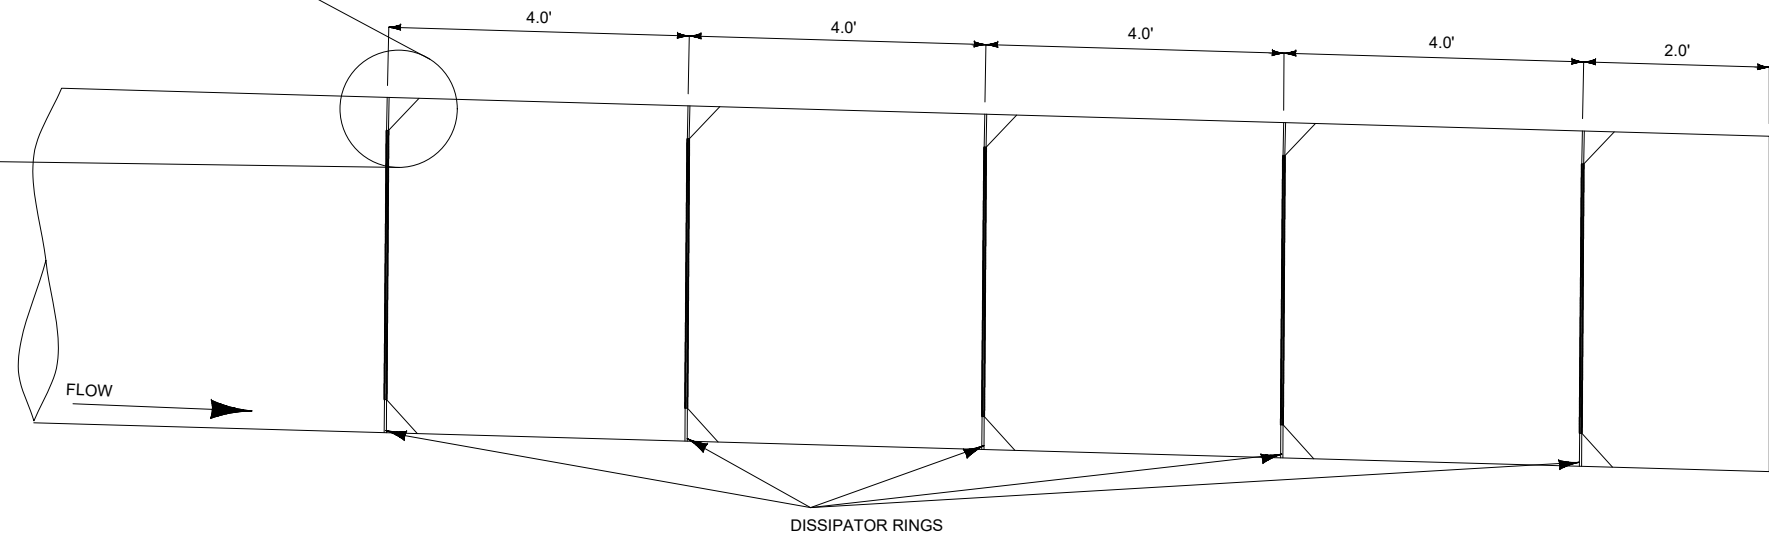

Technical drawing of a circular dissipator ring assembly. The drawing shows a cross-section of a circular structure with a central hole. The outer diameter is 48 inches. The inner hole has a diameter of 36 inches. The ring thickness is 4 inches. The ring is divided into segments by 1/2 inch steel dissipator ring braces. The angle between the braces is 45 degrees. The braces are 1/2 inch thick. The distance between the braces is 12 inches. The distance from the center to the bottom edge of the braces is 1 inch.

1/25/2025 8:54 AM